


2. Combination Switch (Wiper)


S902395

A: REMOVAL S902395A18

- 1) Remove instrument panel lower cover. <Ref. to EI-25 REMOVAL, Instrument Panel Assembly.>
- 2) Remove screws which secure upper column cover to lower column cover.

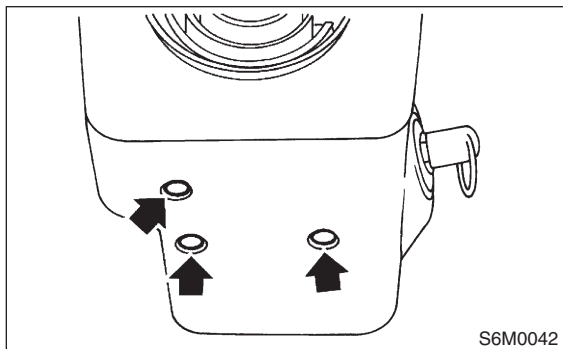

- 3) Disconnect connector from combination switch.
- 4) Remove screws which secure switch and remove switch.

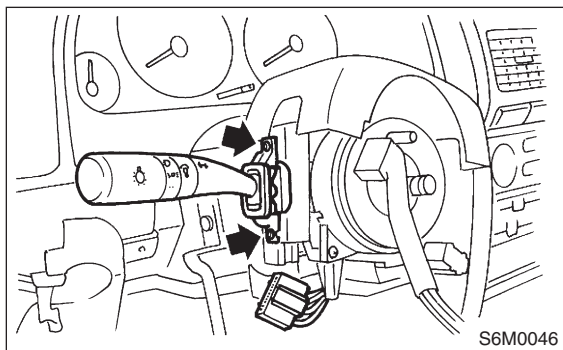

B: INSTALLATION S902395A11

Install in the reverse order of removal.

C: INSPECTION S902395A10

1. FRONT WIPER S902395A1001

Set wiper switch to each position and check continuity between terminals.


• Wiper switch

Terminal Switch position	16	7	17	8	INT1	INT2
OFF	○	○				
	×	×	×			
MIST		○	○			
	×	×	×			
INT	○	○			○	○
	×	×	×		○	○
LO		○	○			
		○	○			
HI			○	○		
		○	○	○		

• Washer switch

Terminal Switch position	11	2
OFF		
ON	○	○

H6M0501B

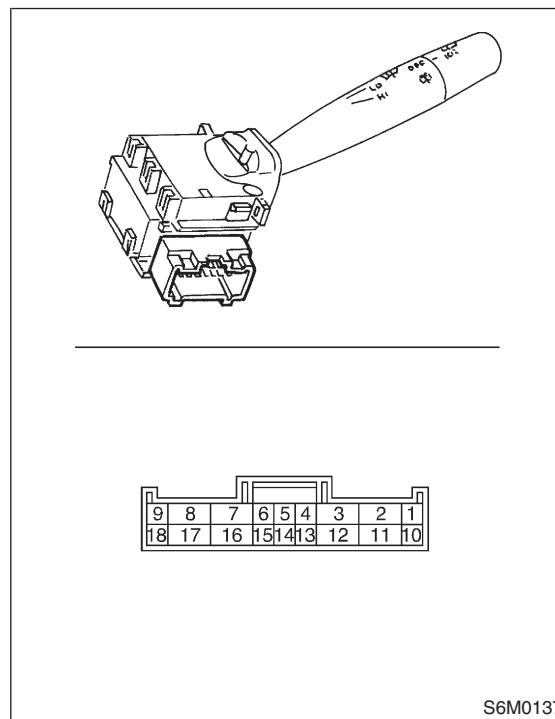

COMBINATION SWITCH (WIPER)

Wiper and Washer Systems


2. REAR WIPER S902395A1002

Set rear wiper and washer switch to each position and check continuity between terminals.

• WITHOUT INTERMITTENT REAR WIPER

Terminal Switch position	10	12		2
WASH				
OFF				
ON				
WASH				

H6M0502B

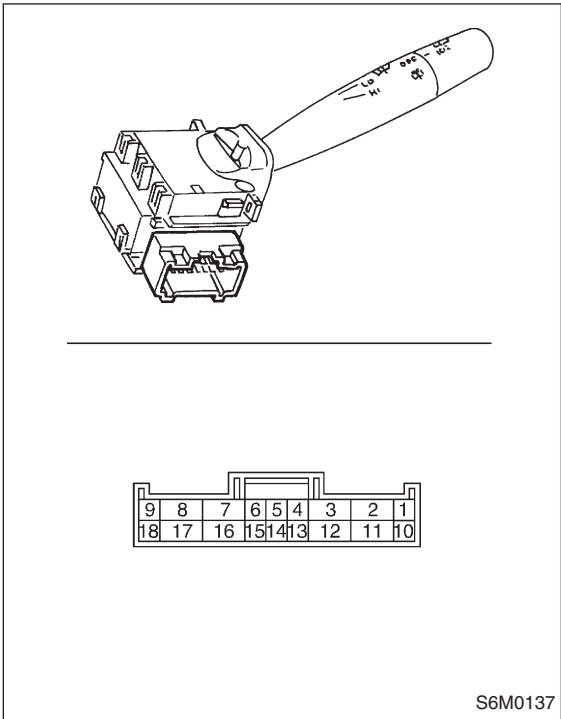

S6M0137