



4. Radio Body

A: REMOVAL

- 1) Disconnect the battery ground cable.
- 2) Remove the center panel while disconnecting connector.

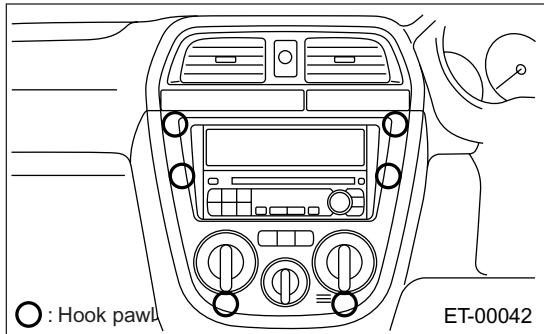

- 3) Remove the fitting screws, and slightly pull radio out from the center console.

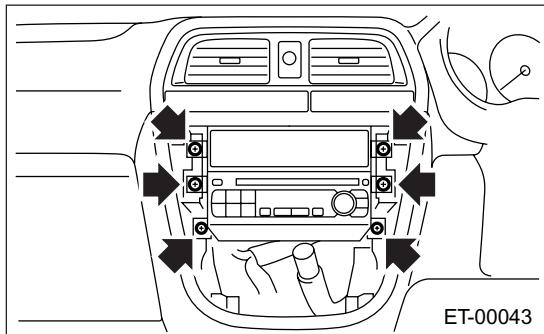

- 4) Disconnect the electric connectors and antenna feeder cord.

B: INSTALLATION

Install in the reverse order of removal.