



24. Rear Shelf Trim

A: REMOVAL

- 1) Disconnect the ground terminal from battery.
- 2) Remove the high-mounted stop light.

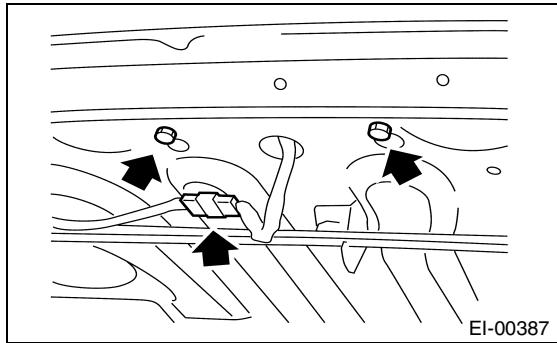

- 3) Remove the rear quarter upper trim. <Ref. to EI-48, REMOVAL, Rear Quarter Trim.>
- 4) Remove the seat belt center lower anchor bolt.
- 5) Remove the rear shelf trim.

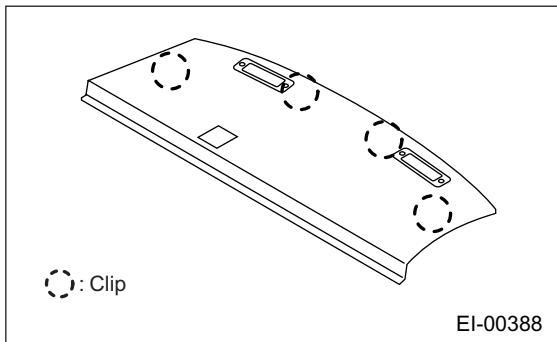

B: INSTALLATION

Install in the reverse order of removal.