


11. Rear Quarter Glass


A: REMOVAL

Remove the glass in the same procedure as for windshield glass. <Ref. to GW-18, REMOVAL, Windshield Glass.>

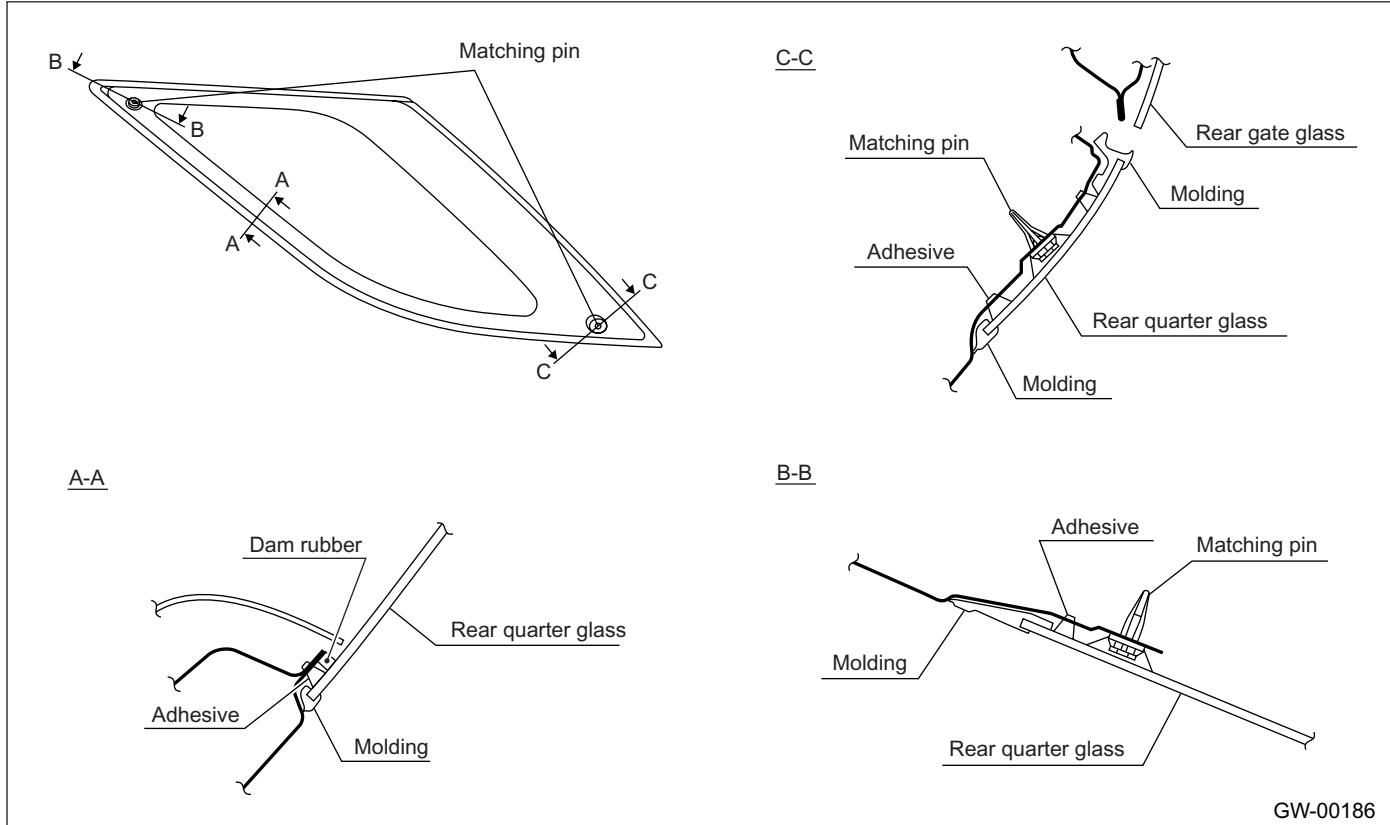

B: INSTALLATION

1) Cut off the nozzle tip as shown in the figure.

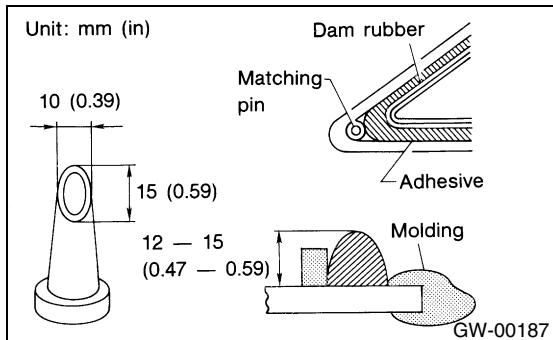

2) Install the glass in the same procedure as for windshield the glass. <Ref. to GW-19, INSTALLATION, Windshield Glass.>

CAUTION:

- When door is opened/closed after glass is bonded, always lower door glass and then open/close it carefully.
- Move vehicle slowly.

3) After completion of all work, allow vehicle to stand for about 24 hours.

NOTE:

For minimum drying time and time the vehicle must be left standing before driving after bonding, follow instructions or instruction manual from the adhesive manufacturer.

4) After curing of adhesive, pour the water on external surface of vehicle to check that there are no water leaks.

CAUTION:

When a vehicle is returned to the user, tell him or her that the vehicle should not be subjected to heavy impact for at least three days.