


13. Front Fog Light Assembly

A: REMOVAL

- 1) Disconnect the ground terminal from battery.
- 2) Remove the mounting bolts, and then detach the fog light assembly.

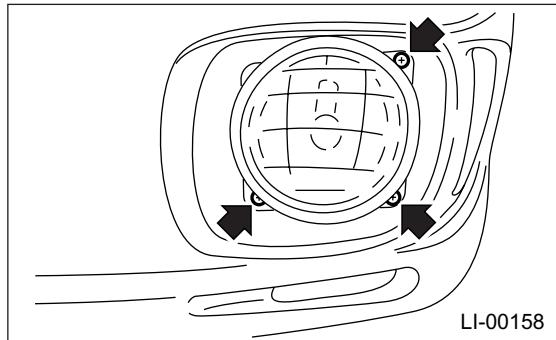

- 3) Disconnect the harness connector.

B: INSTALLATION

Install in the reverse order of removal.