


## 22. High-mounted Stop Light

### A: REMOVAL


#### 1. SEDAN

- 1) Disconnect the ground terminal from battery.
- 2) Disconnect the connector of high-mounted stop light from body harness.
- 3) Remove the bolts, then detach the high-mounted stop light assembly.

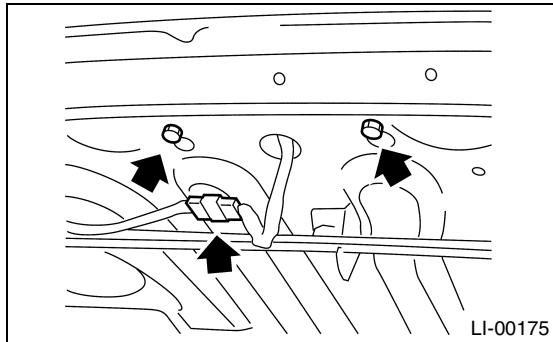

#### 2. WAGON

- 1) Disconnect the ground terminal from battery.
- 2) Remove the screws (A) and then detach the cover (B).
- 3) Remove the screws (C) and then detach the high-mounted stop light while disconnecting the connector.

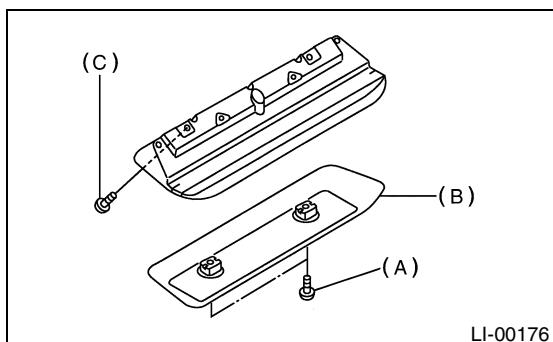

### B: INSTALLATION

Install in the reverse order of removal.

### C: INSPECTION

- 1) Visually check the bulb for blow out.
- 2) Check the bulb specification. <Ref. to LI-2, SPECIFICATIONS, General Description.>
- 3) If NG, replace the bulb with a new one.