


## 2. Pretensioner Connector

### A: OPERATION

#### 1) How to disconnect:

(1) Move the slide lock (A) in the direction of the arrow.

(2) Pull the connector (B) in the direction of the arrow with slide lock (A) moved.

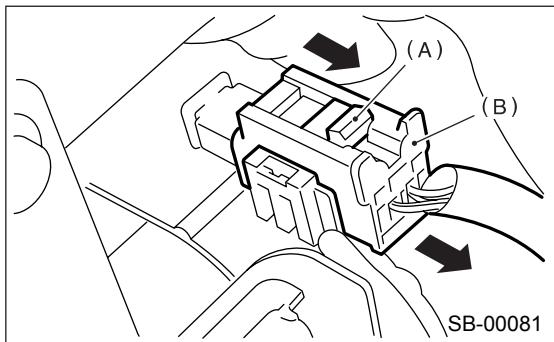


#### CAUTION:

When pulling, be sure to hold onto the connector and not the wire.

#### 2) How to connect:

Holding connector (A), and push it in carefully until a connecting sound is heard.

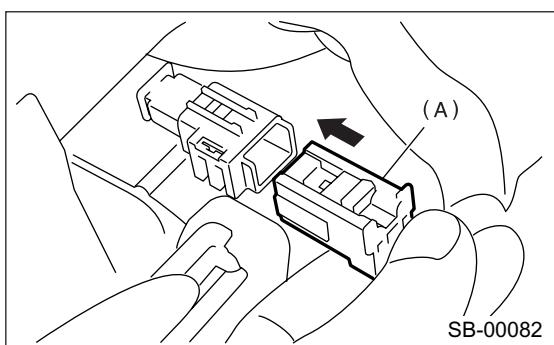

#### CAUTION:

- Be sure to insert the connector in until it locks.
- Then pull on it gently to make sure that it is locked.