

POWER STEERING FLUID

POWER ASSISTED SYSTEM (POWER STEERING)

9. Power Steering Fluid


A: SPECIFICATION

Recommended power steering fluid	Manufacturer
DEXRON III	B.P.
	CALTEX
	CASTROL
	MOBIL
	SHELL
	TEXACO

B: INSPECTION


- 1) Check the power steering fluid for deterioration or contamination. If the fluid is highly deteriorated or contaminated, drain it and refill with new fluid.
- 2) Check the joints and units for oil leakage. If any oil leaks are found, repair or replace the applicable part.
- 3) Inspect the fluid level on flat and level surface with engine "OFF" by indicator of reservoir tank. If the level is at lower point or below, add fluid to keep the level in the specified range of the indicator. If at upper point or above, drain the fluid by using a syringe or the like.

- (1) Check at temperature 20°C (68°F) on reservoir surface of oil pump; read the fluid level on the "COLD" side.
- (2) Check at temperature 80°C (176°F) on reservoir surface of oil pump; read the fluid level on the "HOT" side.

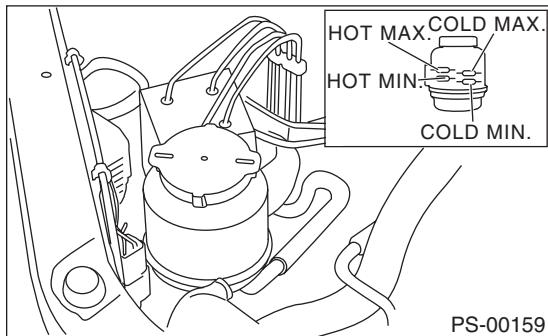

C: INSTALLATION

- 1) Set ST on the top of reservoir tank and fill it about half way with the specified fluid.
ST 34199AE040 OIL CHARGE

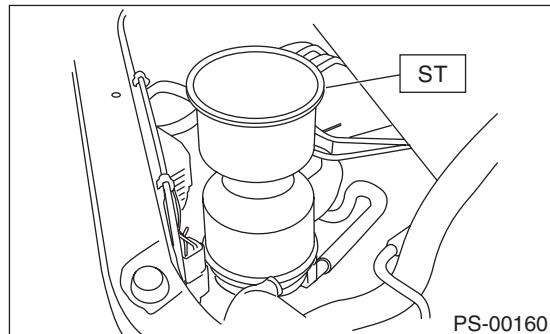

- 2) Continue to turn the steering wheel slowly from lock to lock until the bubbles stop appearing in the tank while keeping the fluid at that level.
- 3) In case air is absorbed to deliver bubbles into piping because the fluid level is lower, leave it about half an hour and then do the step 2) all over again.
- 4) Start the engine and let it idle.
- 5) Continue to turn the steering wheel slowly from lock to lock again until the bubbles stop appearing in the tank while keeping the fluid at that level. It is normal that bubbles stop appearing after three times turning of steering wheel.
- 6) In case bubbles do not stop appearing in the tank, leave it about half an hour and then do the step 5) all over again.
- 7) Stop the engine, and take out safety stands after jacking up vehicle again. Then lower the vehicle, and idle the engine.
- 8) Continue to turn the steering wheel from lock to lock until the bubbles stop appearing and change of the fluid level is within 3 mm (0.12 in).
- 9) In case the following happens, leave it about half an hour and then do step 8) again.
 - (1) The fluid level changes over 3 mm (0.12 in).
 - (2) Bubbles remain on the upper surface of the fluid.
 - (3) Grinding noise is generated from oil pump.

POWER STEERING FLUID

POWER ASSISTED SYSTEM (POWER STEERING)

10) Check the fluid leakage at flare nuts after turning steering wheel from lock to lock with engine running.

CAUTION:

- Before checking, wipe off any fluid on flare nuts and piping.
- In case the fluid leaks from flare nut, it is caused by dust (or the like) and/or damage between flare and tapered seat in piping.
- So remove the flare nut, tighten again it to the specified torque after cleaning flare and tapered seat. If flare or tapered seat is damaged, replace it with a new one.