

WHEEL AND TIRE SYSTEM

WT

	Page
1. General	2

GENERAL

WHEEL AND TIRE SYSTEM

1. General


According to the model grade, the tire size is either of the following two types: P205/55R16 or 215/45R17.

The aluminum wheels are provided with a center cap.


Three types of disk wheels are provided for model grades.

A: TIRE & WHEEL


Specifications		Tire size	Rim size	Aluminum / steel
Front and rear	Non-turbo models	P205/55R16 89V	16×6 1/2JJ	Aluminum (A)
	Turbo models	P205/55R16 89V	16×6 1/2JJ	Aluminum (B)
		215/45R17 91W (option)	17×7 JJ (option)	Aluminum (C) (option)

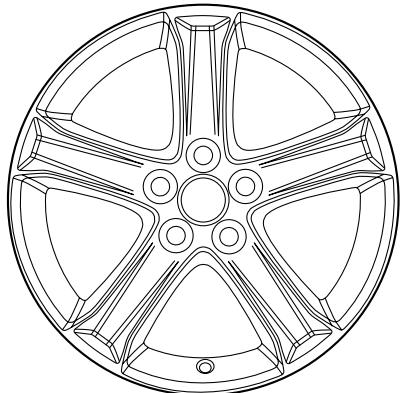

(A)

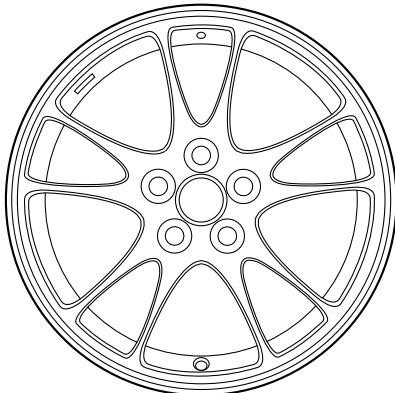

(B)

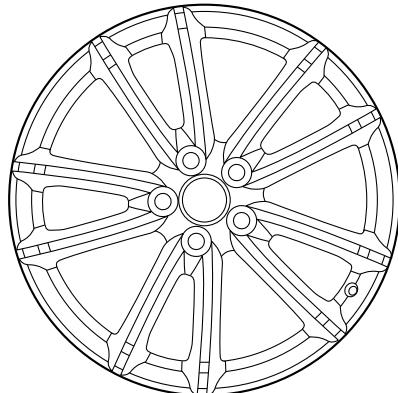

(C)

WT-00068

(A) Aluminum wheel for non-turbo models


(B) Aluminum wheel for turbo models

(C) Aluminum wheel for turbo models (option)

GENERAL

WHEEL AND TIRE SYSTEM

Size	A mm	B mm (in)	C mm	D		E mm
				mm	Holes	
16x6 1/2JJ	Ø405.6	165.0 (6.5)	55	Ø100	5	Ø56
17x7 JJ	Ø436.6	178.5 (7)	55	Ø100	5	Ø56

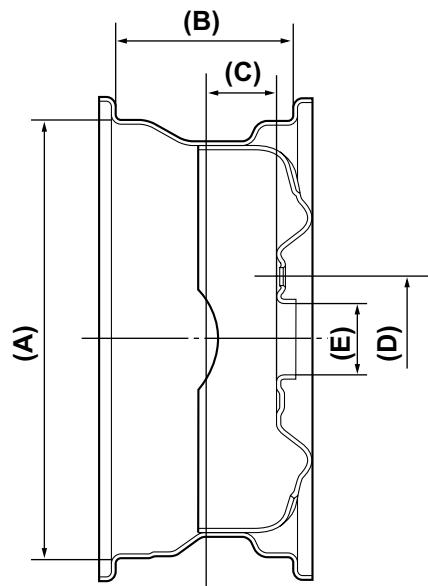

WT-00031

- (A) Rim diameter
- (B) Rim width
- (C) Offset

- (D) P.C.D. (bolt hole pitch circle diameter)
- (E) Center hole diameter


GENERAL

WHEEL AND TIRE SYSTEM

B: SPARE TIRE

A light and compact temporary type spare tire is equipped on all models.

Specifications	Tire size	Rim size
T-type tire	T135/70D16 100M	16 × 4T

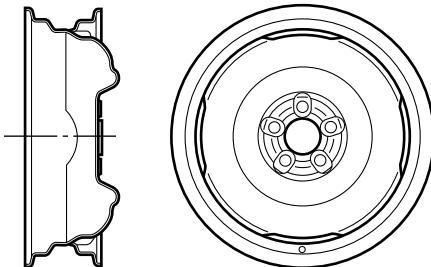

(A)

WT-00065

(A) 16 × 4T