


13. Rear Accessory Power Supply Socket

A: WIRING DIAGRAM

<Ref. to WI-121, WIRING DIAGRAM, Rear Accessory Power Supply Socket System.>

B: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Remove the console box. <Ref. to EI-48, REMOVAL, Console Box.>
- 3) Disconnect the harness connector, and remove the claws (two) in accessory power supply socket.
- 4) Pull the accessory power supply socket out to remove.

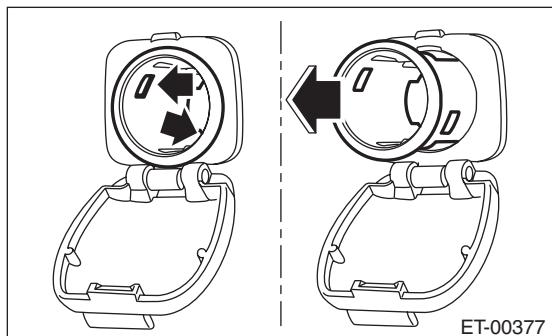

C: INSTALLATION

Install in the reverse order of removal.