



14.AUX Input Terminal

A: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Remove the console box. <Ref. to EI-48, REMOVAL, Console Box.>
- 3) Disconnect the harness connector.
- 4) Disengage four claws, and remove the AUX input terminal by pushing it into the console box.

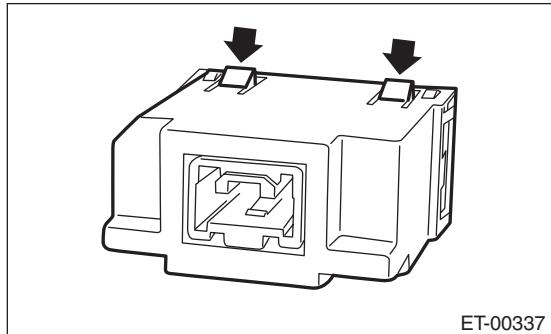

ET-00337

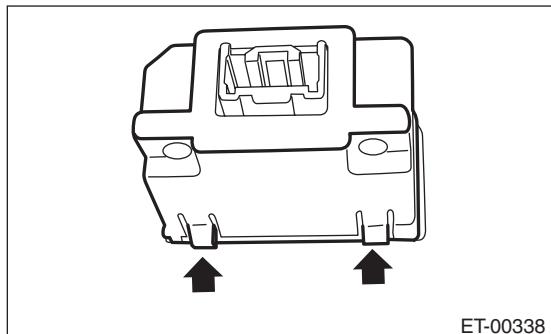

ET-00338

B: INSTALLATION

Install in the reverse order of removal.

COMMUNICATION SYSTEM

COM

	Page
1. General Description	2
2. Horn System	3
3. Horn	4
4. Horn Switch	5