



## 17. Console Box

### A: REMOVAL

- 1) Disconnect the ground cable from the battery.
- 2) Remove the parking brake lever boot.

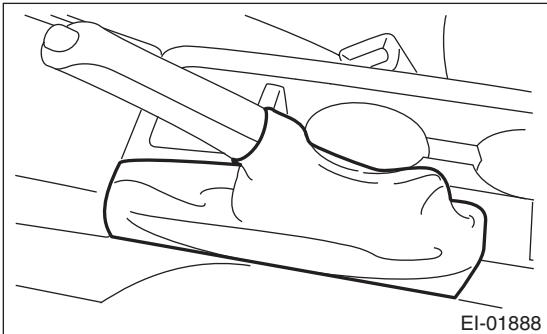

- 3) Remove bolt (A) screw (B) and clip (C).

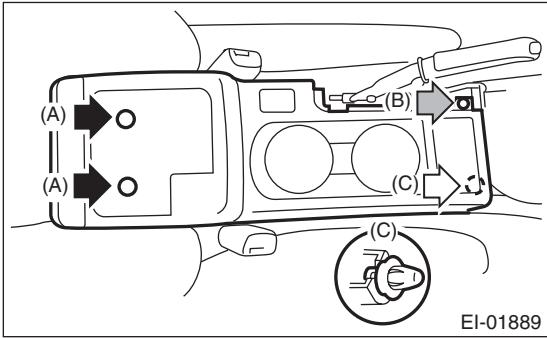

- 4) Disconnect connectors, and remove the console box.

### B: INSTALLATION

Install in the reverse order of removal.