


12. GPS Antenna

A: REMOVAL


- 1) Disconnect the ground cable from the battery.
- 2) Remove the center panel. <Ref. to EI-47, CENTER PANEL, REMOVAL, Center Console.>
- 3) Remove the audio. <Ref. to ET-6, REMOVAL, Audio.>
- 4) Disconnect the connector (green) of GPS antenna.

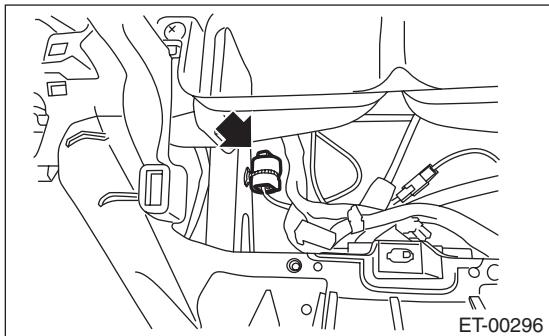

NOTE:

Attach a string of about 50 cm in length, etc. to the GPS antenna for easy installation work.

- 5) Remove the combination meter assembly. <Ref. to IDI-14, REMOVAL, Combination Meter.>
- 6) Remove the screw and harness clamp to remove the GPS antenna.

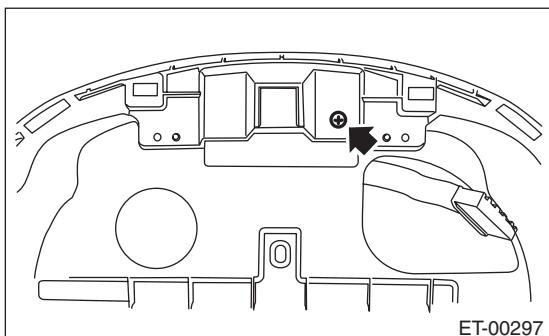

NOTE:

When the GPS antenna harness connector is pulled out, remove the string attached to the connector in step 4).

B: INSTALLATION

Install each part in the reverse order of removal.