


## 14. Rear Accessory Power Supply Socket

### A: WIRING DIAGRAM

Refer to "Rear Accessory Power Supply Socket System" in the wiring diagram. <Ref. to WI-107, WIRING DIAGRAM, Rear Accessory Power Supply Socket System.>

### B: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Remove the console box. <Ref. to EI-46, REMOVAL, Console Box.>
- 3) Disconnect the harness connector, and remove the claws (two) in accessory power supply socket.
- 4) Pull the accessory power supply socket out to remove.

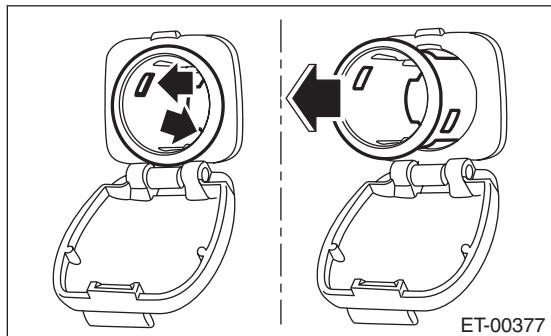

### C: INSTALLATION

Install each part in the reverse order of removal.