
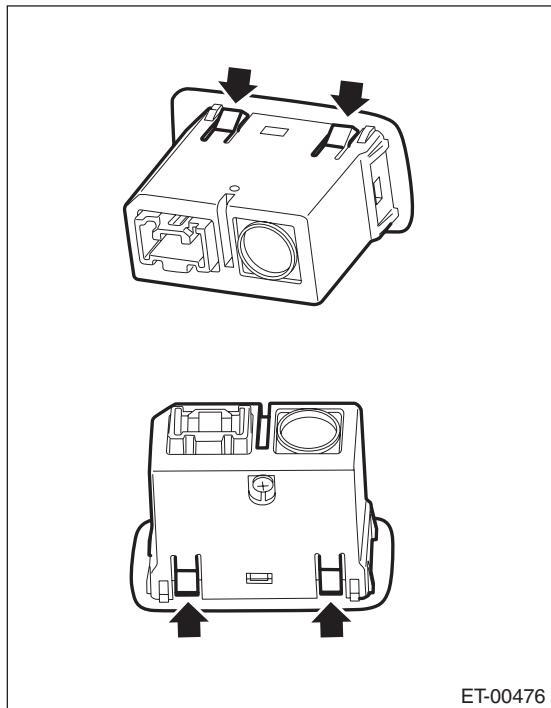


## 15.AUX Input Terminal

### A: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Remove the console box. <Ref. to EI-46, RE-MOVAL, Console Box.>
- 3) Disconnect the harness connector.
- 4) Disengage four claws, and remove the AUX input terminal by pushing it into the console box.

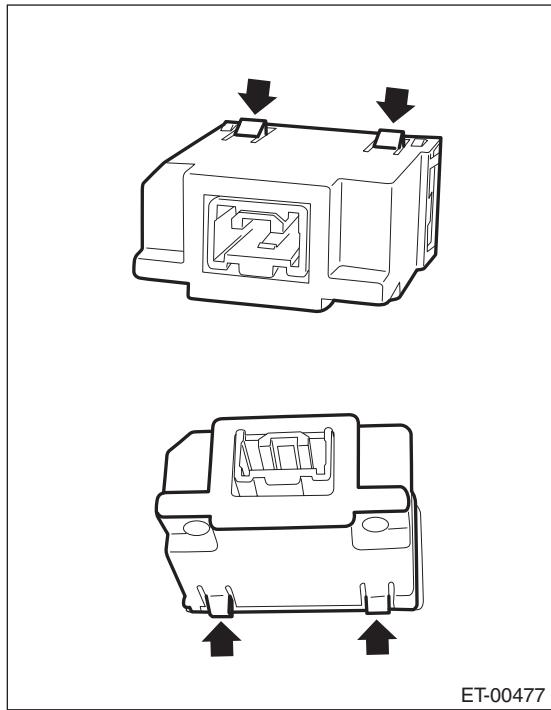

### B: INSTALLATION

Install each part in the reverse order of removal.

# COMMUNICATION SYSTEM

# *COM*

---

	Page
1. General Description .....	2
2. Horn System .....	3
3. Horn .....	4
4. Horn Switch .....	5