



4. Audio

A: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Remove the center panel. <Ref. to EI-47, CENTER PANEL, REMOVAL, Center Console.>
- 3) Remove the screws, and partially pull the audio out from center console.

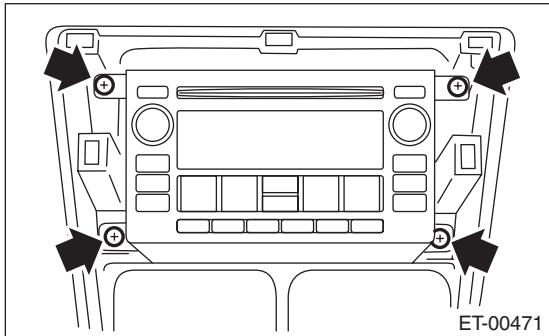

- 4) Disconnect the harness connectors and antenna feeder cord.
- 5) Remove the audio.
- 6) Remove the screws and detach the satellite radio unit.

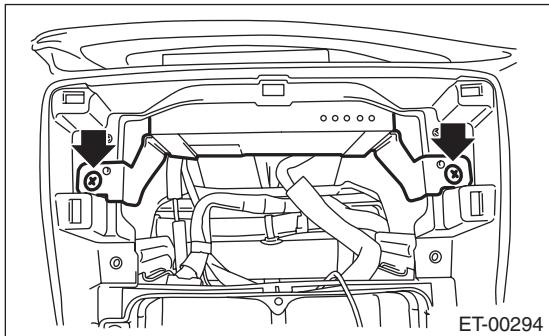

B: INSTALLATION

Install each part in the reverse order of removal.