


2. Front Grille

A: REMOVAL

- 1) Remove the front bumper face. <Ref. to EI-27, FRONT BUMPER FACE, REMOVAL, Front Bumper.>
- 2) Remove the screws from the reverse side of the bumper face, and remove the front grille assembly.

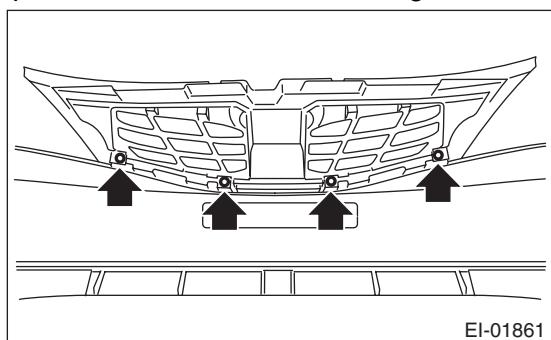

B: INSTALLATION

Install each part in the reverse order of removal.