


General Description

WHEEL AND TIRE SYSTEM

1. General Description

A: SPECIFICATION

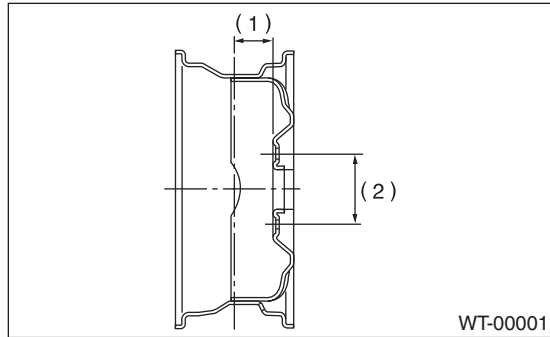

(1) Offset

(2) P.C.D.

Tire size	Wheel size	Offset mm (in)	P.C.D. mm (in)	Tire inflation pressure kPa (kgf/cm ² , psi)	
				Front wheel	Rear wheel
P205/55 R16 89V	16 × 6 ¹ / ₂ JJ	55 (2.17)	100 (3.94)	230 (2.3, 33)	220 (2.2, 32)
P205/50 R17 88V	17 × 7JJ				

Spare tire size	Wheel size	Offset mm (in)	P.C.D. mm (in)	Tire inflation pressure kPa (kgf/cm ² , psi)	
				Front wheel	Rear wheel
T125/70 D17 98M	17 × 4T	30 (1.18)	100 (3.94)	—	420 (4.2, 60)
P205/55 R16 89V	16 × 6 ¹ / ₂ JJ	55 (2.17)		230 (2.3, 33)	220 (2.2, 32)


NOTE:

Size and inflation pressure of the standard equipment tire and spare tire are described on the “Tire inflation pressure” label attached to the body side of the driver’s door.

1. SERVICE DATA

Part	Axial runout	Radial runout
Steel wheel	1.5 mm (0.059 in)	
Aluminum wheel	1.0 mm (0.039 in)	

B: COMPONENT

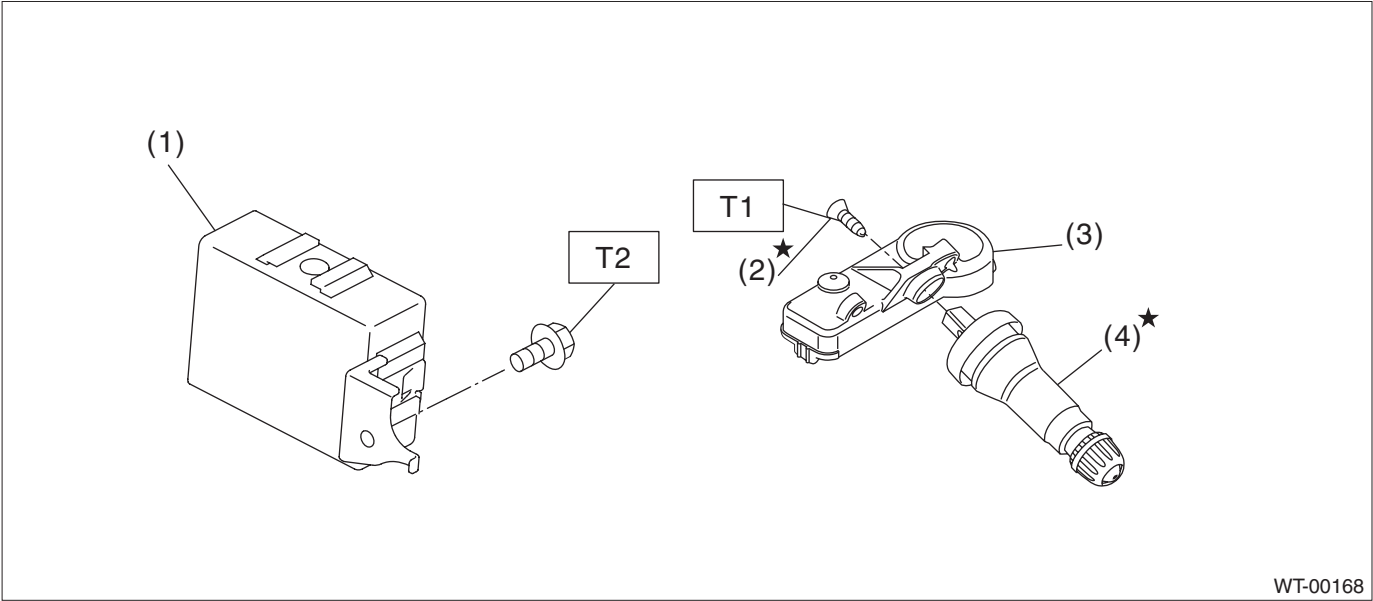

- (1)

TPMS & keyless entry control module
- (2)

Screw
- (3)

Transmitter (Snap in type)
- (4)

Valve

Tightening torque:N·m (kgf-m, ft-lb)

T1: 1.4 (0.14, 1)
T2: 7.5 (0.76, 5.5)

C: PREPARATION TOOL

1. GENERAL TOOL

TOOL NAME	REMARKS
Air pressure gauge	Used for measuring tire air pressure.
Dial gauge	Used for measuring wheel runout.
Wheel balancer	Used for adjusting wheel balance.