


6. Subaru Select Monitor

A: OPERATION

- 1) Prepare the Subaru Select Monitor kit.

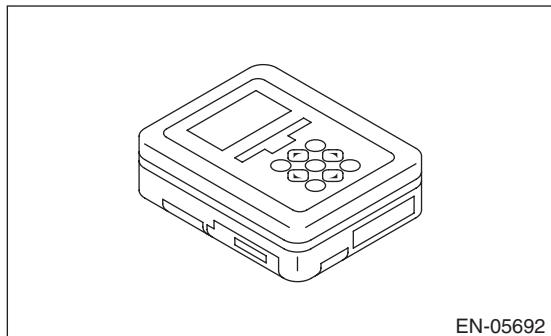

- 2) Prepare PC with Subaru Select Monitor installed.


- 3) Connect the USB cable to SDI (Subaru Diagnosis Interface) and USB port on the personal computer (dedicated port for the Subaru Select Monitor).

NOTE:

The dedicated port for the Subaru Select Monitor means the USB port which was used to install the Subaru Select Monitor.

- 4) Connect the diagnosis cable to SDI.

- 5) Connect SDI to data link connector located in the lower portion of the instrument panel (on the driver's side).

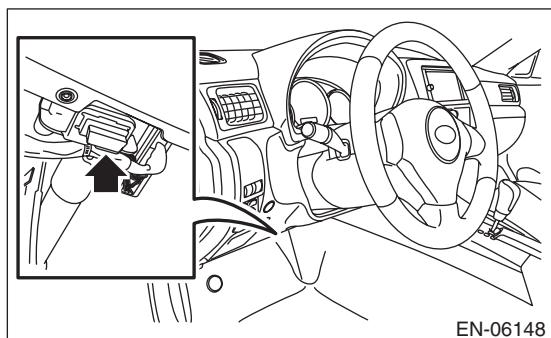

CAUTION:

Do not connect the scan tools other than the Subaru Select Monitor.

- 6) Start the PC.
- 7) Turn the ignition switch to ON.
- 8) Run the "PC application for Subaru Select Monitor".