


### 40. Reflex Reflector

#### A: REMOVAL

From behind the bumper face - rear, release the claws and remove the reflex reflector assembly.

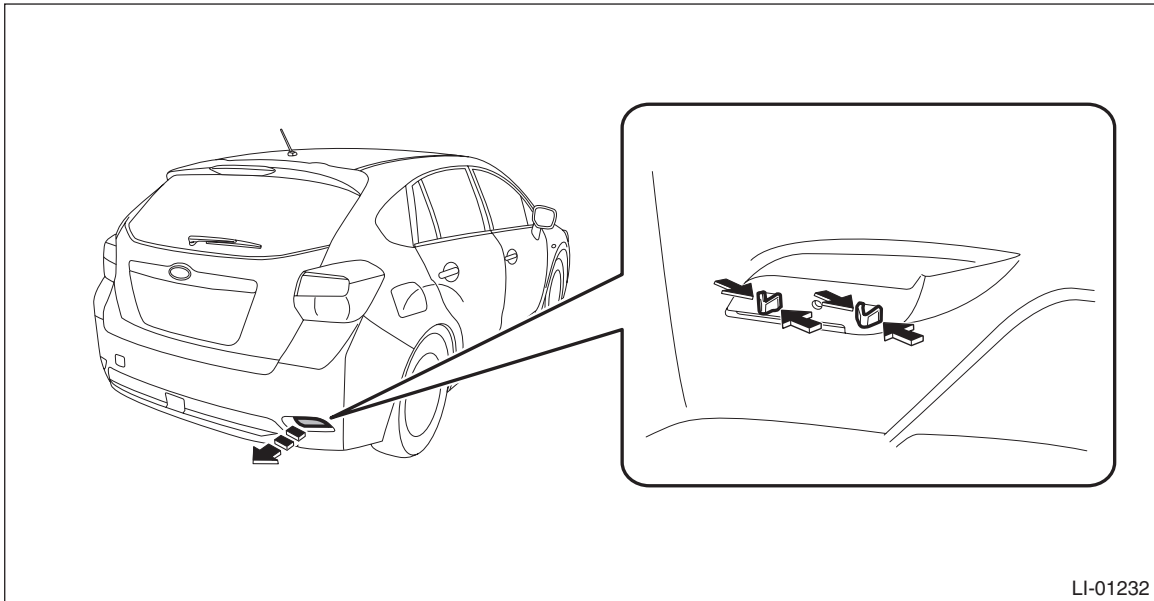

#### B: INSTALLATION

Install each part in the reverse order of removal.