


6. Tweeter

A: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Remove the front door gusset cover. <Ref. to EI-45, FRONT DOOR, REMOVAL, Door Trim.>
- 3) Disconnect the harness connector.
- 4) Remove the screws and detach the tweeter.

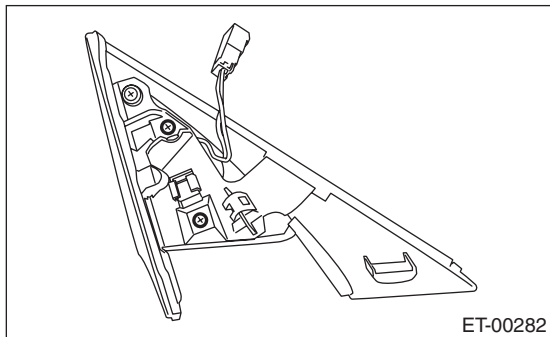

B: INSTALLATION

Install each part in the reverse order of removal.