



### 23. Rear Shelf Trim

#### A: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Remove the rear quarter trim. <Ref. to EI-61, 4 DOOR MODEL, REMOVAL, Rear Quarter Trim.>
- 3) Remove the seat belt center anchor lower bolt.  
(3-point type belt only)

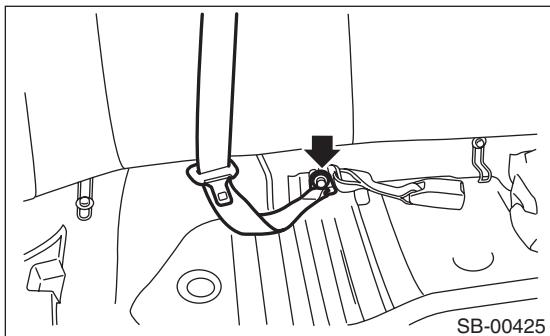

- 4) Remove the high-mounted stop light. <Ref. to LI-32, 4 DOOR MODEL (STANDARD TYPE), REMOVAL, High-mounted Stop Light.>
- 5) Remove the clips, and remove the rear shelf trim.

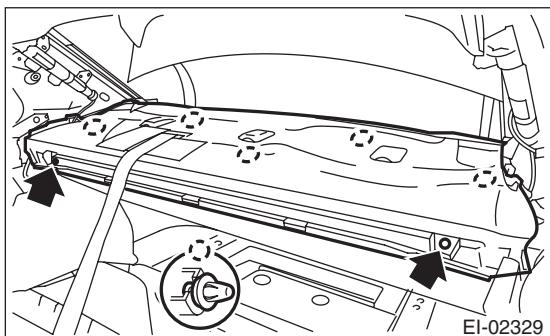

#### B: INSTALLATION

Install each part in the reverse order of removal.