

16. Rear Window Defogger System

A: WIRING DIAGRAM

Refer to "Rear Defogger System" in the wiring diagram. <Ref. to WI-135, WIRING DIAGRAM, Rear Defogger System.>

B: INSPECTION

1. SYSTEM INSPECTION

Symptom	Repair order
Rear window defogger does not operate.	<ol style="list-style-type: none"> 1. Check the fuse. 2. Check the rear defogger relay. 3. Check the rear defogger switch. 4. Check the heat wire. 5. Check the wiring harness. 6. Check body integrated unit.

NOTE:

Rear window defogger system can be customized on the Subaru Select Monitor, when the body integrated unit customize setting {A/C ECM setting} is "support".

System name	Initial setting	Customize setting
Rr defogger op. mode	OFF after 15 min.	Repeat 15 min. operation and 2 min. stop.

2. CHECK WITH SUBARU SELECT MONITOR

CAUTION:

Check whether the "Rr defogger op. mode" setting is in initial setting or customize setting before performing inspection.

1) Check the input signal when the rear window defogger switch is operated using Subaru Select Monitor.

(1) Prepare the Subaru Select Monitor. <Ref. to GW-7, PREPARATION TOOL, General Description.>

(2) Turn the ignition switch to ON (engine OFF) and run the "PC application for Subaru Select Monitor".

(3) On «System Selection Menu» display, select {Integ. unit mode}.

(4) Select the {Rr defogger output} on {Current Data Display & Save}.

(5) Check the displayed data (ON/OFF) by operating the rear window defogger switch.

2) Check the operation with rear window defogger switch ON.

- When customize setting is set as "Continuous", it is normal if the 15-minute operation and 2-minute stop repeats.

- When customize setting is "Normal", it is normal if the operation lasts for 15 minutes and then turns OFF.

3) When the operation in 2) above fails, replace the body integrated unit.

3. HEAT WIRE INSPECTION

CAUTION:

When wiping off the stain on glass with cloth, use a dry and soft cloth and move it in the direction of the heat wire extension to avoid damage to the heat wire.

1) Prepare the following checking items.


- Liquid crystal thermograph sheet (approximate size: 300 × 300 mm (11.8 × 11.8 in) and thermal temperature: 35 — 40°C (95 — 104°F))

- Aluminum foil

- 2) Turn the ignition switch to ON.

- 3) Turn the defogger switch to ON.

- 4) Push the liquid crystal thermograph sheet from the outside of the rear glass.

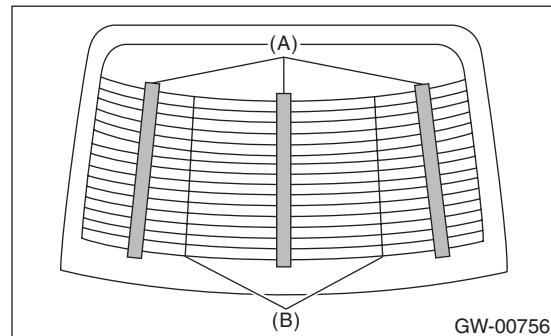

(A) Liquid crystal thermograph sheet

(B) Separate line

NOTE:

Use the liquid crystal thermograph sheet every range it is separated with the separate line.

5) Determine the faulty heat wire by checking the color of the liquid crystal thermograph sheet.

Liquid crystal thermograph sheet	Criteria
Change occurred (red → blue)	Normal
No change (black)	Open

NOTE:


- Check from the inside of the glass if the liquid crystal thermograph sheet does not change.

- The time for the color change may differ depends on the surface temperature of the glass.

Rear Window Defogger System


GLASS/WINDOWS/MIRRORS

6) Wrap a piece of aluminum foil around the tip of tester probe and press it against the heat wire with your finger.

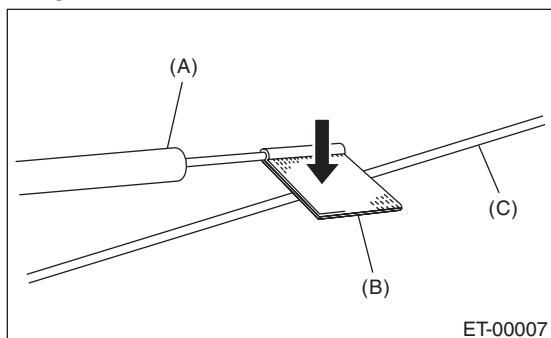

(A) Tester probe
(B) Aluminum foil
(C) Heat wire

7) To both ends of the section that has been found to include an open in the step 5), apply the tester positive (+) probe and the negative (-) probe.
8) Move the tester probe on the negative (-) side slowly along the heat wire. If voltage changes from zero to several volts during movement of tester probe, heat wire is open at the voltage change point.

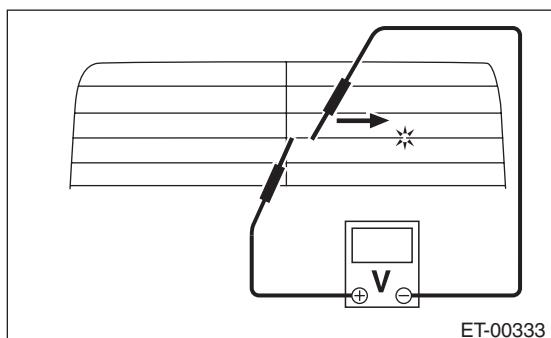


9) Repair the heat wire that determines the place of the open circuit. <Ref. to GW-34, REPAIR, Rear Window Defogger System.>

C: REPAIR

- 1) Clean the broken portion with alcohol or white gasoline.
- 2) Mask both side of wire with masking tape.
- 3) Apply the conductive silver composition to the broken portion.

Conductive silver composition:

Permatex's QUICK GRID

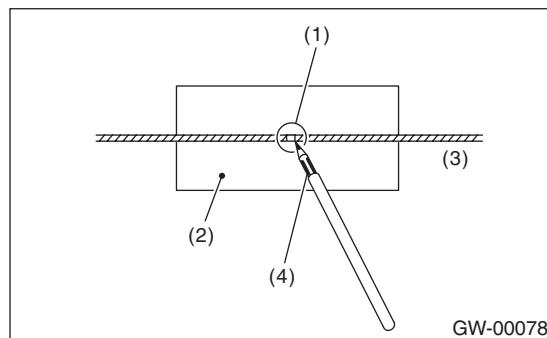

(1) Broken portion
(2) Masking tape
(3) Broken wire
(4) Conductive silver composition

- 4) Dry using a dryer after applying the composition.
- 5) After repair, check the wire.