


22. Rear Side Marker Light Bulb

A: REMOVAL

NOTE:

Equipped with 5 door model only.

- 1) Remove the rear combination light assembly.
<Ref. to LI-25, 5 DOOR MODEL, REMOVAL, Rear Combination Light Assembly.>
- 2) Turn the socket and remove the bulb.

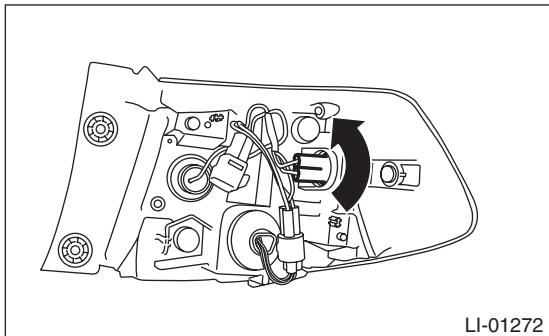

B: INSTALLATION

Install each part in the reverse order of removal.

C: INSPECTION

- 1) Visually check the bulb for blow out.
- 2) Check the bulb specification. <Ref. to LI-2, SPECIFICATION, General Description.>
- 3) Replace the bulb if it is found defective.