



3. Reverse Check Cable

A: REMOVAL


- 1) Remove the gear shift knob.
- 2) Remove the console box. <Ref. to EI-51, REMOVAL, Console Box.>
- 3) Remove the console side cover and console front panel.
- 4) Remove the clamp.

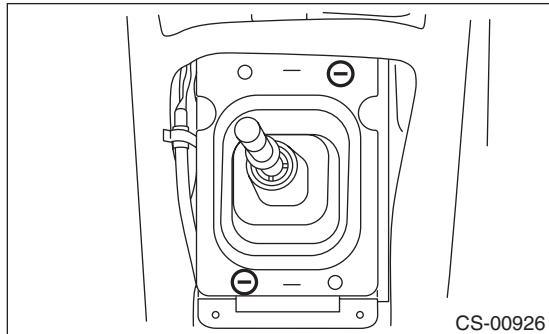

- 5) Remove the boot and insulator assembly.

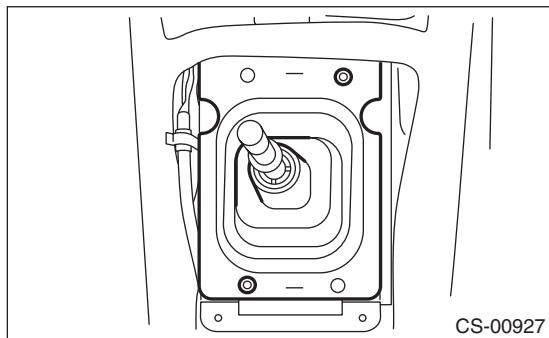


- 6) Remove the spring pin from the slider.

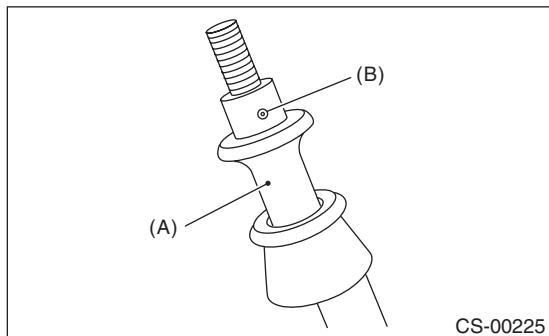


(A) Slider
(B) Spring pin

- 7) Remove the slider and spring.

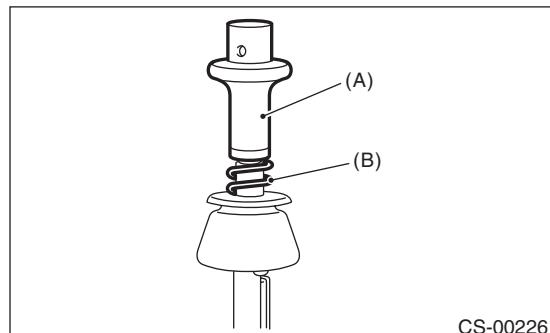


(A) Slider
(B) Spring

- 8) Cut the band clip, and separate the reverse check cable from the gear shift lever.

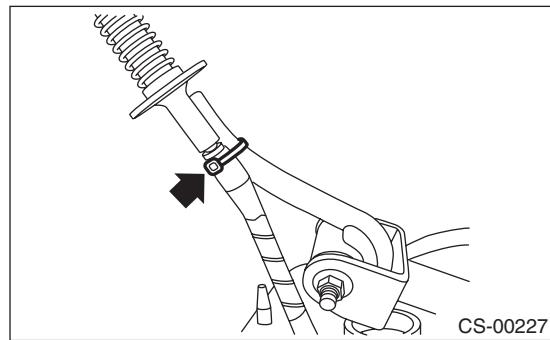

- 9) Lift up the vehicle.
- 10) Remove the under cover.
- 11) Remove the center exhaust pipe. <Ref. to EX(STI)-8, REMOVAL, Center Exhaust Pipe.>
- 12) Remove the heat shield cover.

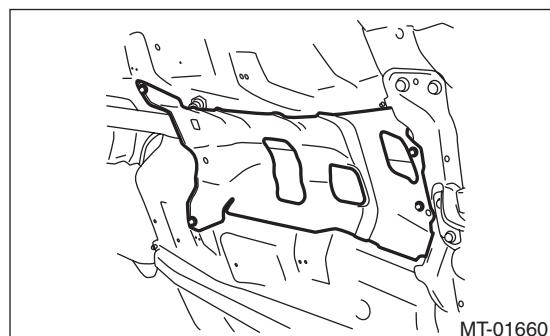


- 13) Remove the crossmember. <Ref. to 6MT-29, REMOVAL, Transmission Mounting System.>

Reverse Check Cable

CONTROL SYSTEMS

14) Remove the snap pin and washer, and separate the reverse check cable from the reverse check lever.

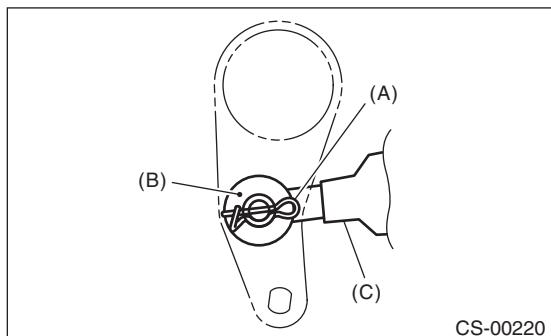

CS-00220

(A) Snap pin


(B) Washer

(C) Reverse check cable

15) Move the transmission to the right side, and remove the stay bolts and the reverse check cable.

NOTE:

If the transmission is not moved aside, the stay bolts may contact the body and cause damage.

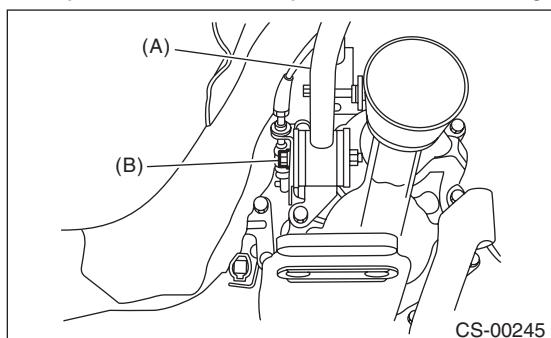


CS-00245

(A) Stay

(B) Stay bolt

16) Lift up the stay clip, and separate the stay from the reverse check cable.

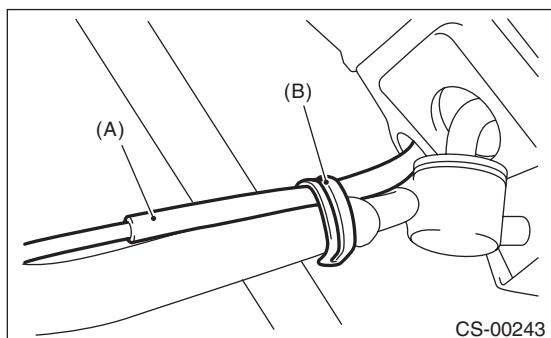

CS-00243

(A) Reverse check cable


(B) Clip

17) Pull out the reverse check cable from underside of the vehicle to remove it.

NOTE:

Be careful not to damage the inner boot.

18) Loosen the lock nut, and remove the reverse check cable from the cable plate.

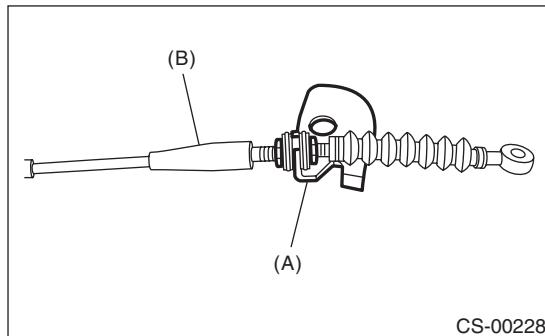

CS-00228

(A) Cable plate

(B) Reverse check cable

B: INSTALLATION


1) Insert the reverse check cable into the inner boot hole from underside of the vehicle.

2) Insert the reverse check cable into the gear shift lever assembly, and secure it with the band clip.

NOTE:

• Cut the excess band clip.

• Make sure that the reverse check cable is inserted into the gearshift lever with no gaps.

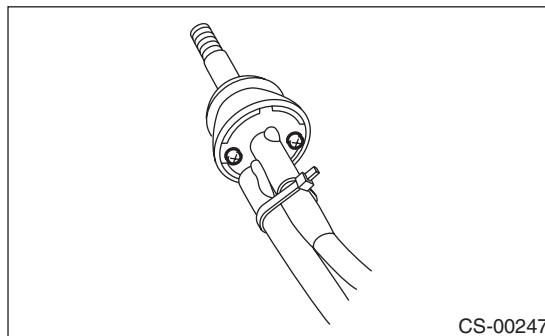


CS-00247

3) Use the spring pin to secure the end of the slider and reverse check cable.

NOTE:

Apply grease to the moving part of slider.

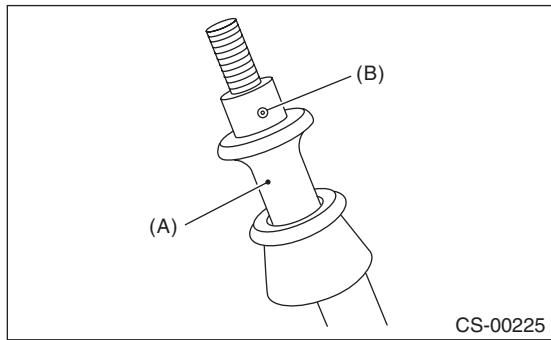

CS-00225


(A) Slider

(B) Spring pin

4) Move the transmission to the right side, and install the stay.

Tightening torque:

T: 32 N·m (3.3 kgf-m, 23.6 ft-lb)

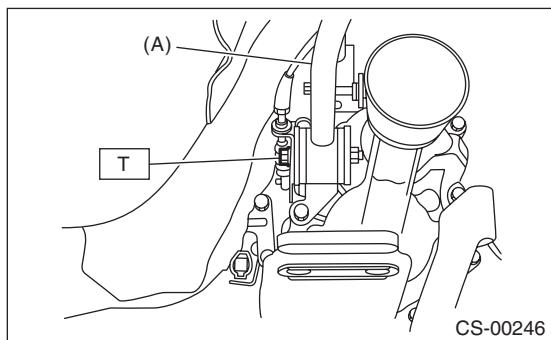


CS-00246

(A) Stay

5) Install the reverse check cable, washer and snap pin to the reverse check lever.

NOTE:

Make sure to point the snap pin in an appropriate direction.

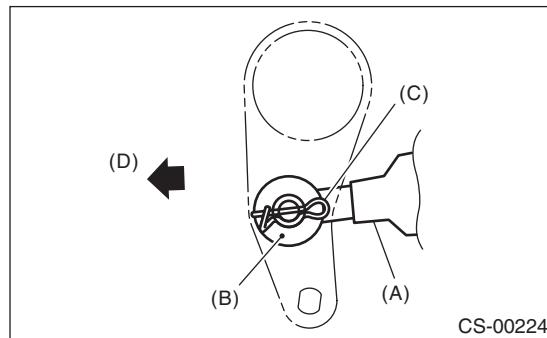

CS-00224

(A) Reverse check cable

(B) Washer


(C) Snap pin

(D) Front side

6) Make sure the hole of extension case is aligned with that of reverse check lever. If the hole positions are not aligned, adjust the reverse check cable. <Ref. to CS-27, ADJUSTMENT, Reverse Check Cable.>

NOTE:

- Check that the M3 bolt goes through the hole of reverse check lever and can be inserted into the hole of extension case.
- When checking visually, confirm that the gap of hole positions is 0.5 mm (0.02 in) or less.

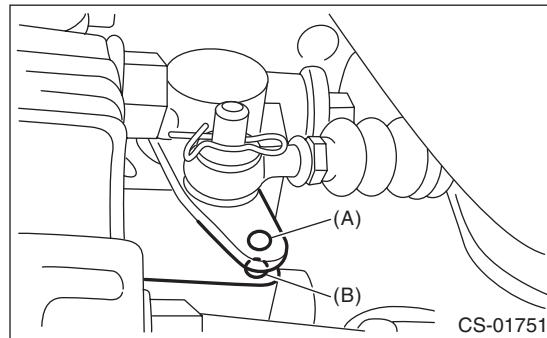

CS-01751

(A) Hole of reverse check lever

(B) Hole of extension case


Reverse Check Cable

CONTROL SYSTEMS

7) Secure the reverse check cable to the stay clip.

NOTE:

Install the reverse check cable on top of the stay.

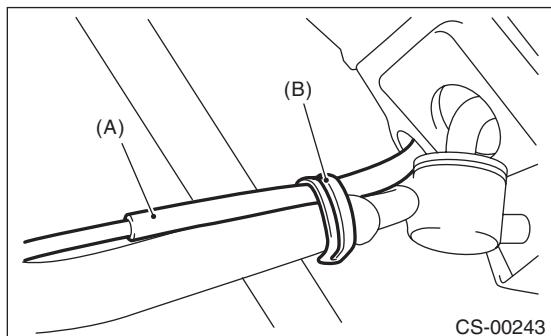

(A) Reverse check cable


(B) Clip

8) Install the crossmember. <Ref. to 6MT-29, INSTALLATION, Transmission Mounting System.>

9) Install the heat shield cover.


Tightening torque:

18 N·m (1.8 kgf·m, 13.3 ft·lb)

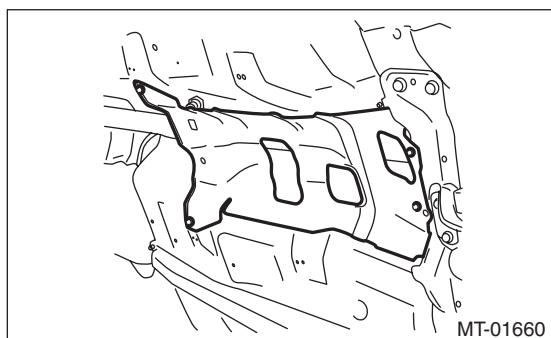

10) Install the center exhaust pipe. <Ref. to EX(STI)-9, INSTALLATION, Center Exhaust Pipe.>

11) Install the boot and insulator assembly, and secure with a clamp.

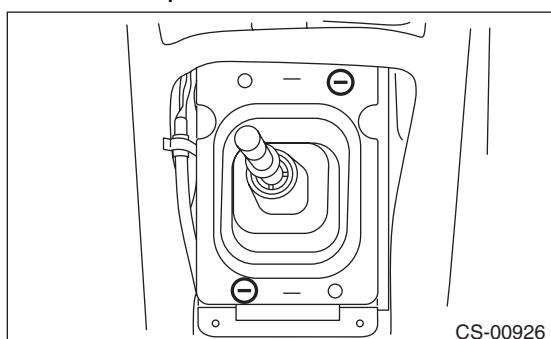

12) Install the console side cover and console front panel. <Ref. to EI-54, INSTALLATION, Center Console.>

13) Install the console box. <Ref. to EI-51, INSTALLATION, Console Box.>

14) Install the gear shift knob.

C: INSPECTION

1) Make sure the slider moves smoothly. If it does not move, adjust the reverse check cable, or check the slider for damage. <Ref. to CS-27, ADJUSTMENT, Reverse Check Cable.>

2) Check if the gear shifts into reverse when pulling up the slider. If the gear cannot shift into reverse, adjust the reverse check cable. <Ref. to CS-27, ADJUSTMENT, Reverse Check Cable.>


3) Check that the gear does not shift into reverse when the slider is not pulled up. If the gear shifts into reverse, adjust or replace the reverse check cable. <Ref. to CS-27, ADJUSTMENT, Reverse Check Cable.>

4) Make sure the hole of extension case is aligned with that of reverse check lever. If the hole positions are not aligned, adjust the reverse check cable. <Ref. to CS-27, ADJUSTMENT, Reverse Check Cable.>

NOTE:

- Check that the M3 bolt goes through the hole of reverse check lever and can be inserted into the hole of extension case.

- When checking visually, confirm that the gap of hole positions is 0.5 mm (0.02 in) or less.

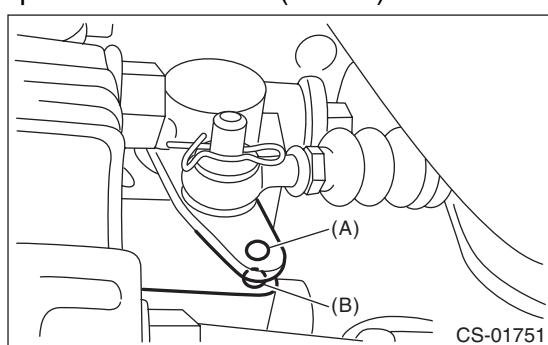


(A) Hole of reverse check lever


(B) Hole of extension case

D: ADJUSTMENT


- 1) Lift up the vehicle.
- 2) Remove the transmission under cover.
- 3) Remove the center exhaust pipe. <Ref. to EX(STI)-8, REMOVAL, Center Exhaust Pipe.>
- 4) Remove the heat shield cover.

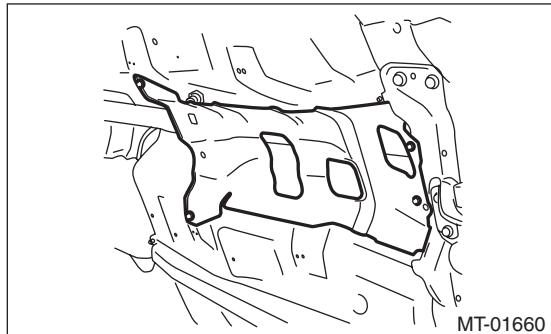

- 5) Remove the crossmember. <Ref. to 6MT-29, REMOVAL, Transmission Mounting System.>
- 6) Measure the distance "A" from the shift bracket seating face on transmission side to the hole edge of the reverse check lever.

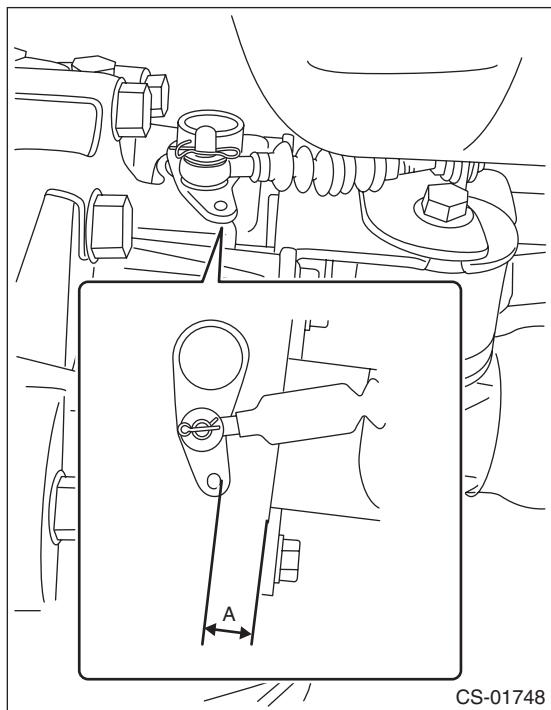

- 7) Measure the distance "B" from the shift bracket seating face on transmission side to the hole edge of the extension case.

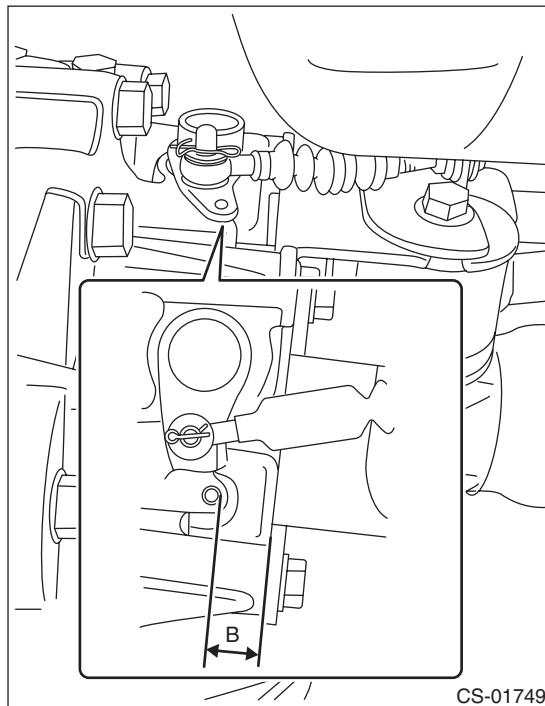

- 8) Calculate the following formula and determine the amount of cable adjustment.

$$T \text{ mm} = (A - B) \times 0.56$$

$$[T \text{ in} = (A - B) \times 0.56]$$


T: Amount of cable adjustment

A: Distance from the shift bracket seating face on transmission side to the hole edge of the reverse check lever

B: Distance from the shift bracket seating face on transmission side to the hole edge of the extension case

NOTE:


- If the value "T" (amount of cable adjustment) is positive (+), shorten the length "C" (from cable plate edge to reverse check cable) by using adjustment procedures.
- If the value "T" (amount of cable adjustment) is negative (-), lengthen the length "C" (from cable plate edge to reverse check cable) by using adjustment procedures.

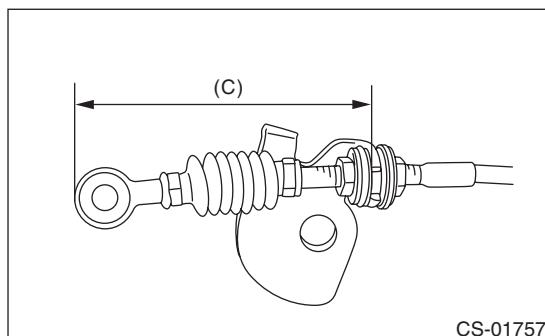

Reverse Check Cable

CONTROL SYSTEMS

9) Remove the snap pin and washer, and separate the reverse check cable from the reverse check lever.

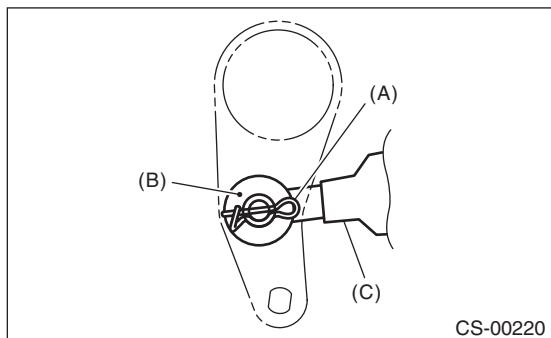


(A) Snap pin
(B) Washer
(C) Reverse check cable

10) Move the transmission to the right side, and remove the stay bolts and the reverse check cable.

NOTE:


If the transmission is not moved aside, the stay bolts may contact the body and cause damage.

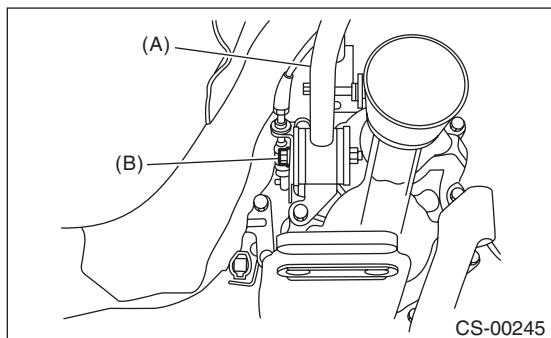

(A) Stay
(B) Stay bolt

11) Check the adjustment of the reverse check cable.

(1) Add a marking on the reverse check cable.

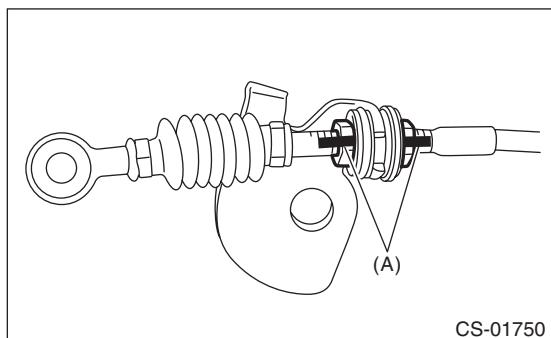


(A) Marking

(2) According to the value "T" (amount of cable adjustment) calculated in the step 8), turn the lock nut of reverse check cable back and forth, then adjust the length "C" (from cable plate edge to reverse check cable).

NOTE:

- Turning the lock nut toward front of the vehicle makes the cable length shorter and toward the rear of the vehicle the cable length longer.
- The amount of the cable adjustment by one lock nut rotation is 1 mm (0.04 in).
- Turn the lock nuts on both sides by the same adjustment amount.

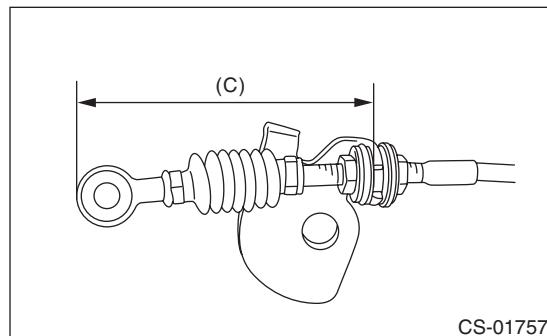

(3) Tighten the lock nut.


Tightening torque:

6 N·m (0.6 kgf·m, 4.4 ft-lb)

12) Move the transmission to the right side, and install the stay.

Tightening torque:

T: 32 N·m (3.3 kgf·m, 23.6 ft-lb)

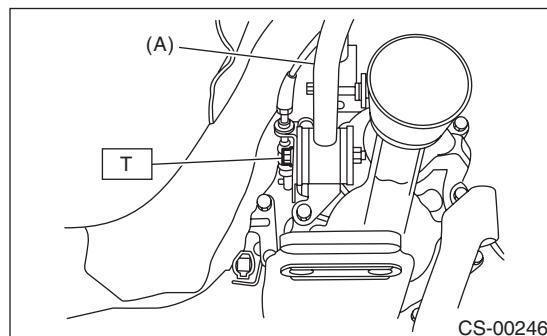


(A) Stay

13) Install the reverse check cable, washer and snap pin to the reverse check lever.

NOTE:

Make sure to point the snap pin in an appropriate direction.

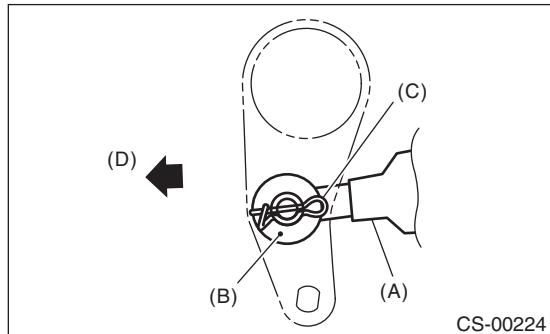


(A) Reverse check cable
 (B) Washer
 (C) Snap pin
 (D) Front side

14) Make sure the hole of extension case is aligned with that of reverse check lever. If the hole positions are not aligned, return to the step 6) and repeat the adjustment procedures of the reverse check cable.

NOTE:

- Check that the M3 bolt goes through the hole of reverse check lever and can be inserted into the hole of extension case.
- When checking visually, confirm that the gap of hole positions is 0.5 mm (0.02 in) or less.

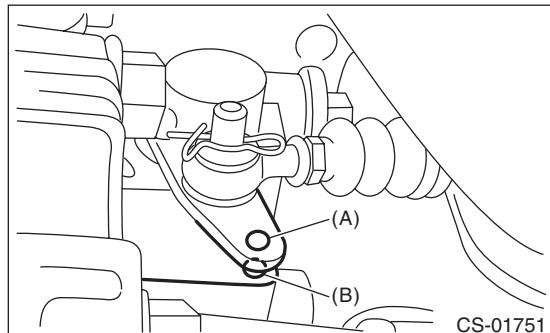


(A) Hole of reverse check lever
 (B) Hole of extension case

NOTE:

If the hole positions are not aligned after repeating the reverse check cable adjustment, adjust the cable hole position to the reference standard.

Distance from the shift bracket seating face on transmission side to the hole edge of the reverse check lever "A":

Reference standard
16 mm (0.63 in)

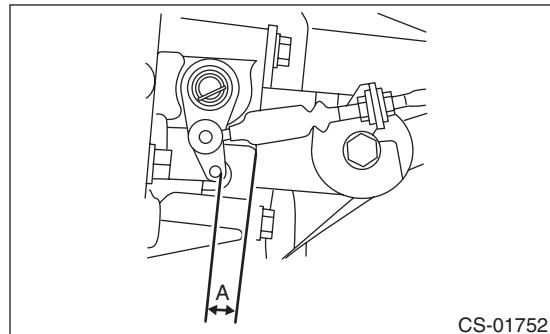


CS-01752

15) Install the crossmember. <Ref. to 6MT-29, INSTALLATION, Transmission Mounting System.>

16) Install the heat shield cover.

Tightening torque:

18 N·m (1.8 kgf-m, 13.3 ft-lb)

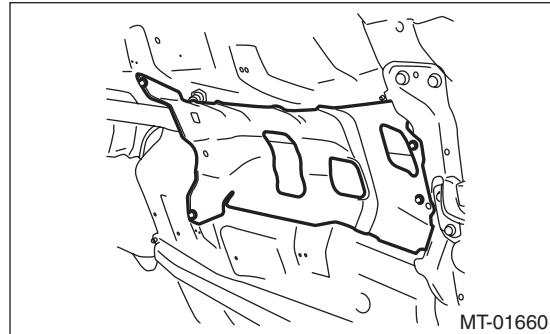

MT-01660

17) Install the center exhaust pipe. <Ref. to EX(STI)-9, INSTALLATION, Center Exhaust Pipe.>

18) Install the transmission under cover.

Tightening torque:

18 N·m (1.8 kgf-m, 13.3 ft-lb)