

General Description


IGNITION

1. General Description

A: SPECIFICATION

Item		SPECIFICATION	
Ignition coil and ignitor ASSY		Type FK 0376	
Ignition system		Independent ignition coil	
Manufacturer		Diamond Electric	
Spark plug	Manufacturer and type	NGK: SIFR6A11	
	Thread size (diameter, pitch, length)	mm	14,1.25,19
	Spark plug gap	mm (in)	Standard 1.0 — 1.1 (0.039 — 0.043)
	Electrode	Iridium	

B: COMPONENT

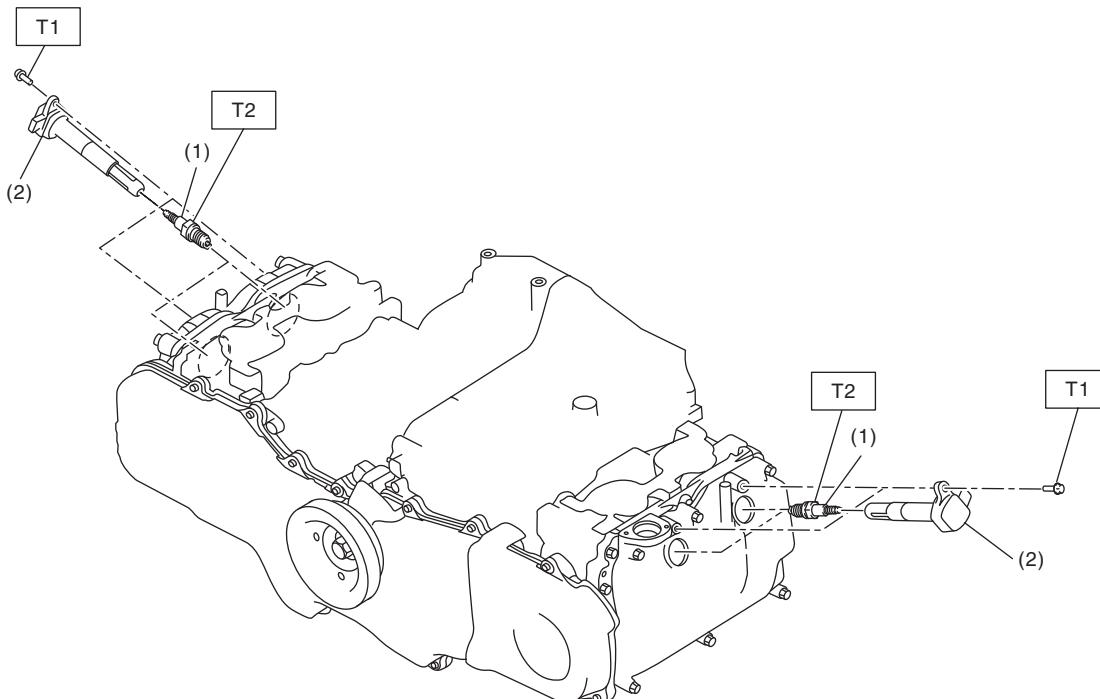

IG-02103

(1) Spark plug

(2) Ignition coil

Tightening torque:N·m (kgf·m, ft·lb)

T1: 9 (0.9, 6.6)

T2: 21 (2.1, 15.5)

C: CAUTION

- Wear appropriate work clothing, including a cap, protective goggles and protective shoes when performing any work.
- Remove contamination including dirt and corrosion before removal, installation or disassembly.
- Keep the disassembled parts in order and protect them from dust and dirt.
- Before removal, installation or disassembly, be sure to clarify the failure. Avoid unnecessary removal, installation, disassembly and replacement.
- Vehicle components are extremely hot after driving. Be wary of receiving burns from heated parts.
- Be sure to tighten fasteners including bolts and nuts to the specified torque.
- Place shop jacks or rigid racks at the specified points.
- Before disconnecting connectors of sensors or units, be sure to disconnect the ground cable from the battery.