


## 5. Washer Tank and Motor

### A: REMOVAL

- 1) Open the front hood.
- 2) Disconnect the ground cable from battery.
- 3) Remove the bumper face.
  - (1) Remove the clips, turn over the front mud guard, and disconnect the fog light connector. (Model with fog light)

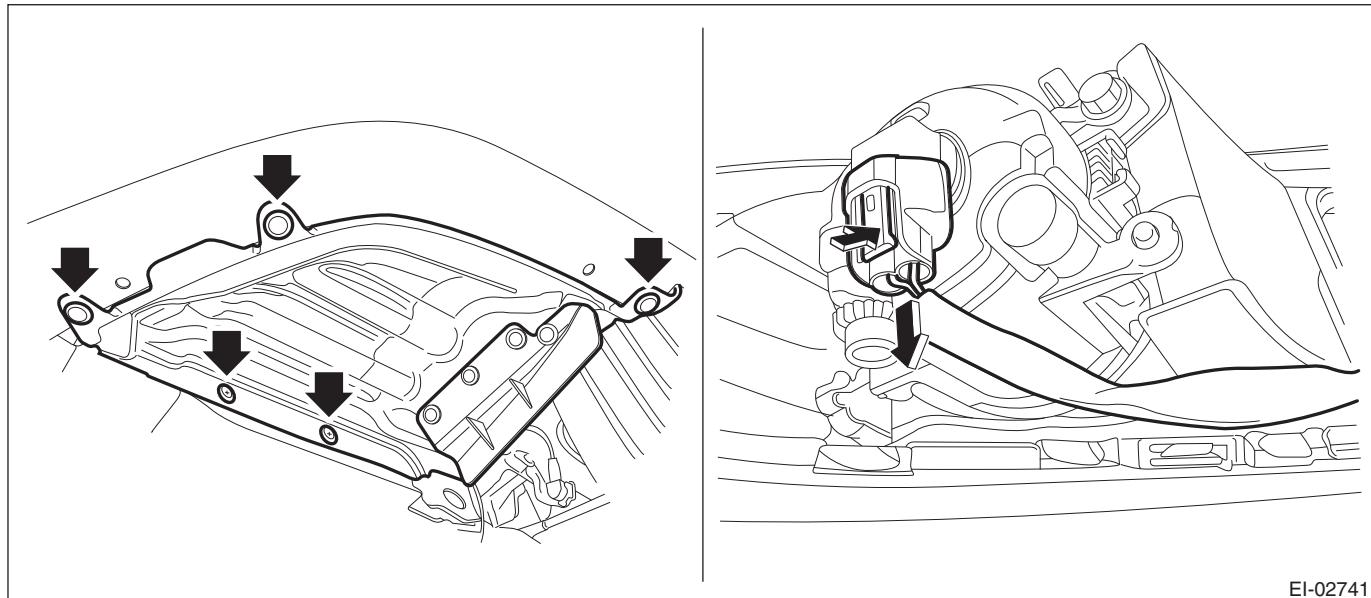


- (2) Remove the clips at the upper side of the bumper.
- (3) Remove the clips from the fender.

## Washer Tank and Motor

### WIPER AND WASHER SYSTEMS

(4) Remove the clips at the lower side of bumper.

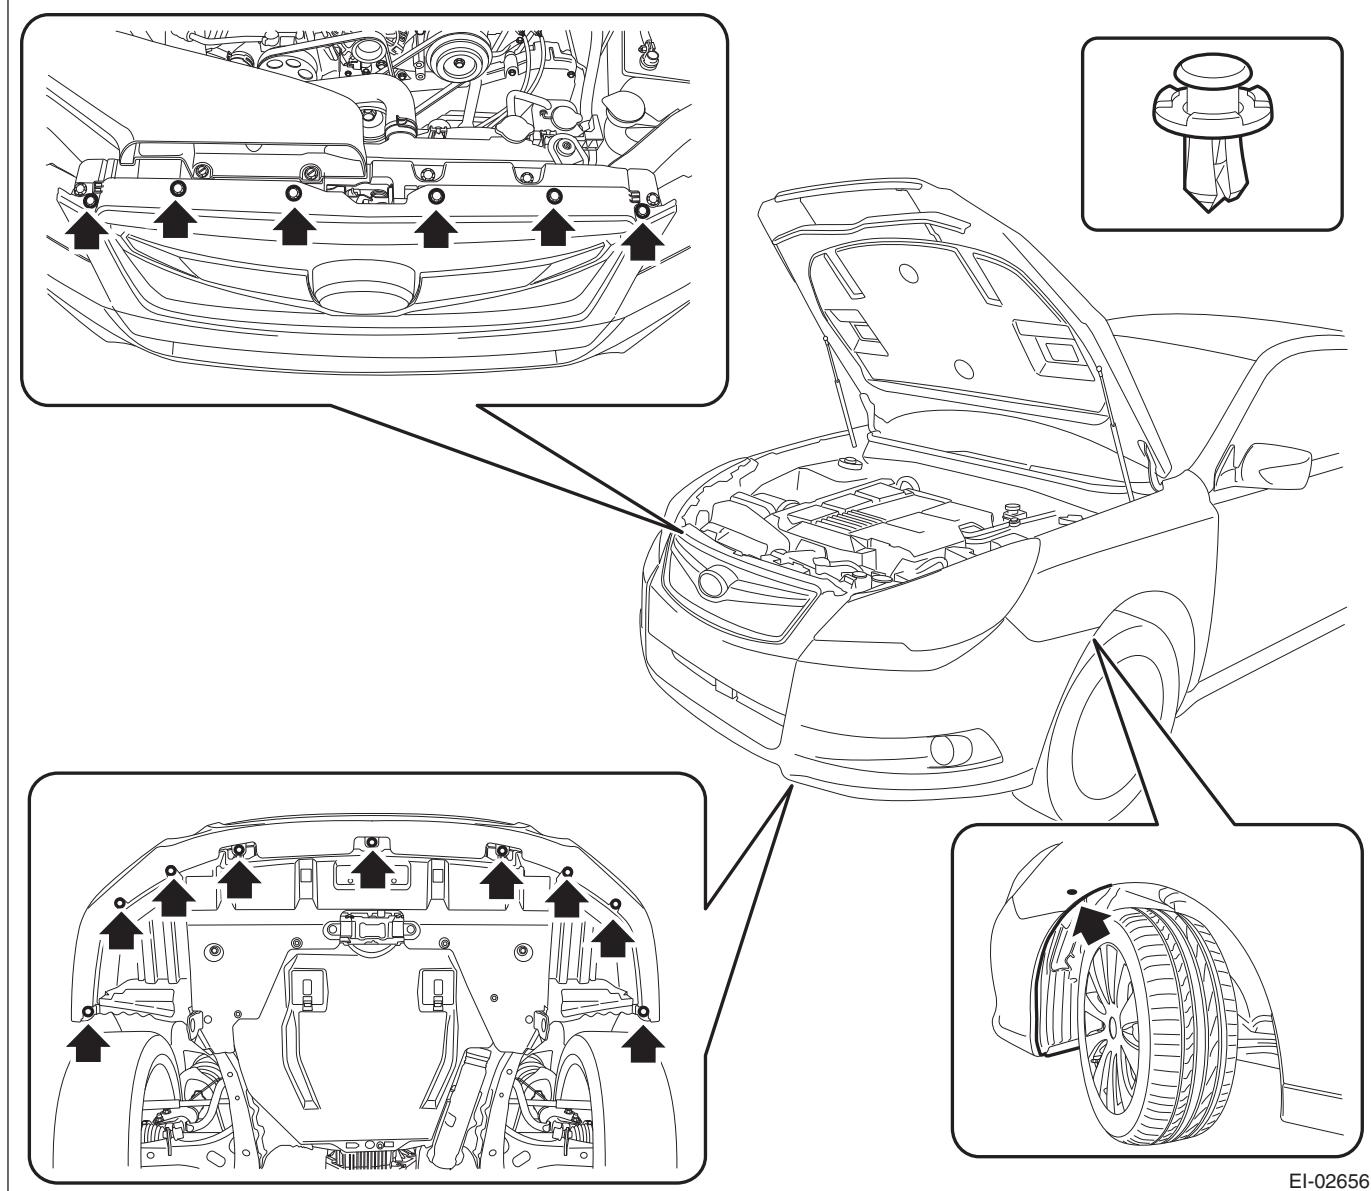

EI-02656


# Washer Tank and Motor

## WIPER AND WASHER SYSTEMS

(5) Detach the flange section on the bumper face side from the bracket side front UPR.

### CAUTION:

**Do not pull forcibly. Doing so may damage the flange sections on the bumper face side.**

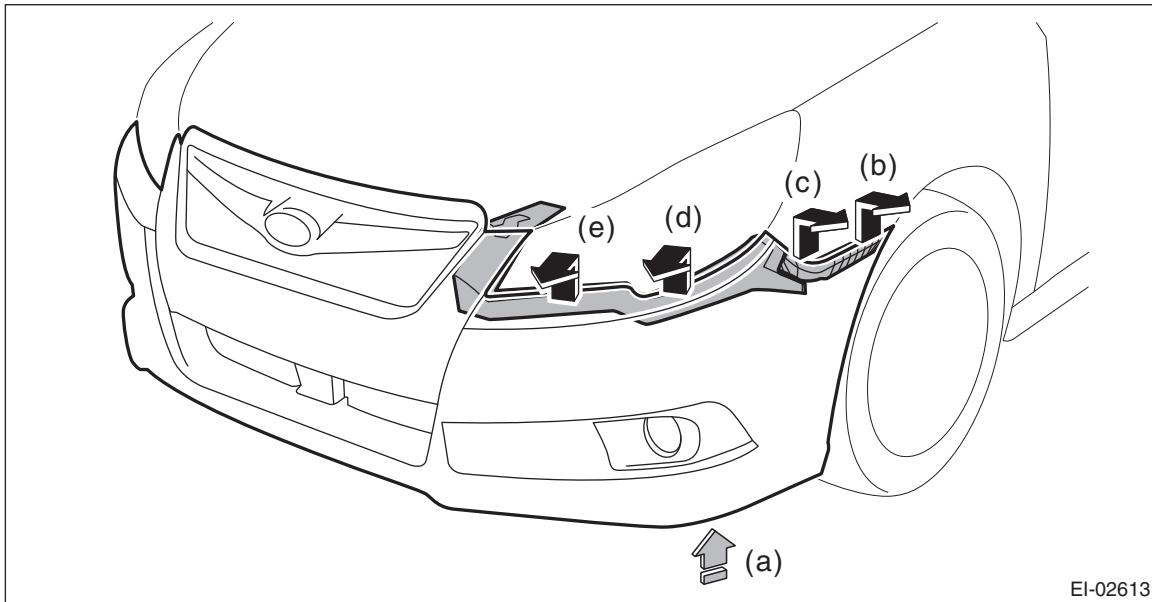


### NOTE:

Pushing up the lower side (a) of the fog light, remove from (b) to (e).

Detach the opposite side in the same manner.

4) Remove the washer tank assembly.


(1) Remove the clip of the washer tank duct.

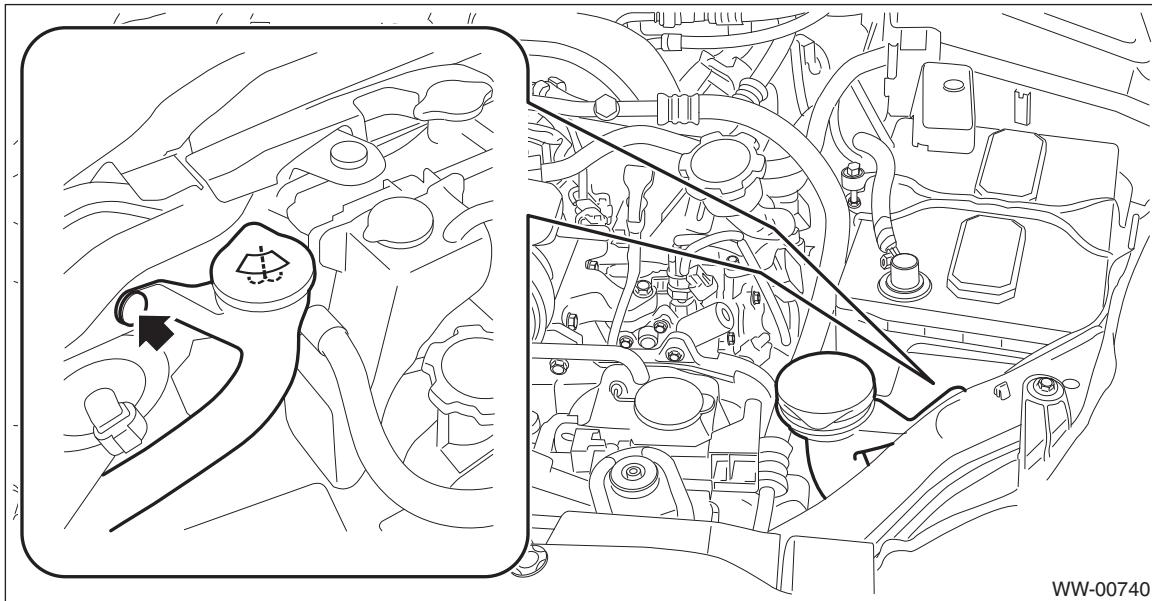

(2) Prepare a container before disconnecting the washer hose and drain all washer fluid in the tank.

(3) Disconnect the connector from the washer motor and washer tank level sensor, and then remove the harness clip.

(4) Remove the bolt and nuts and remove the washer tank assembly.

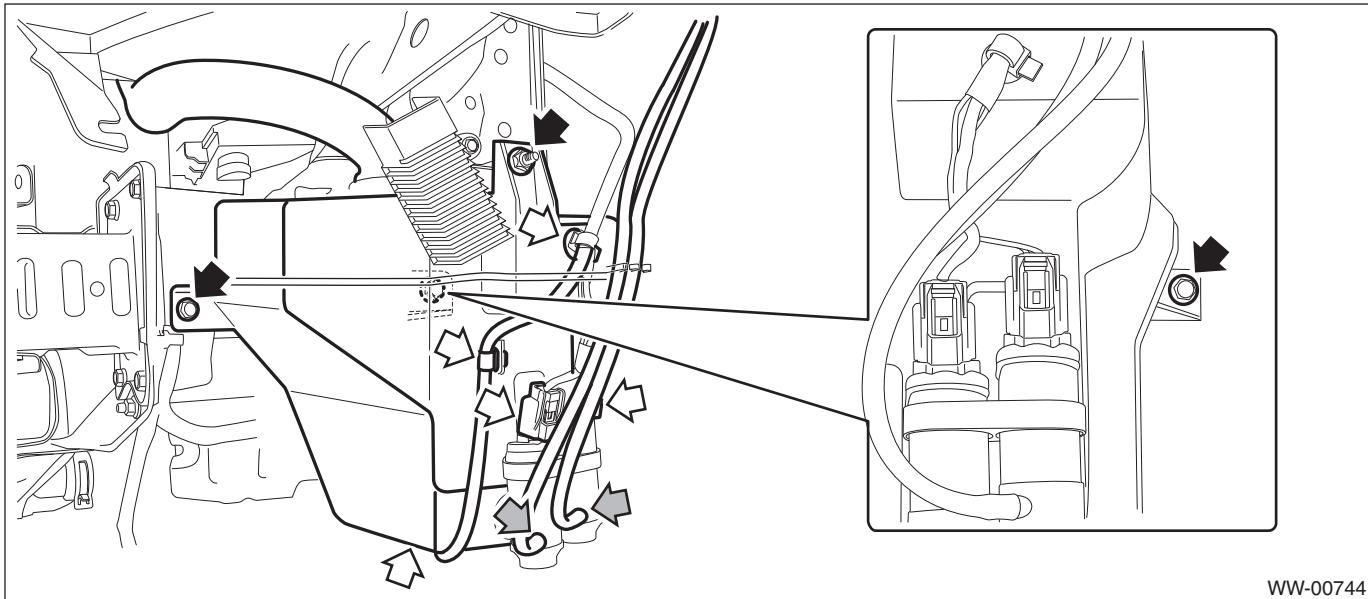


5) Remove the washer motor from the tank.

## B: INSTALLATION

1) Install each part in the reverse order of removal.

### CAUTION:

Install the bumper face so that the under cover front end (b) comes inside the front bumper face (a).

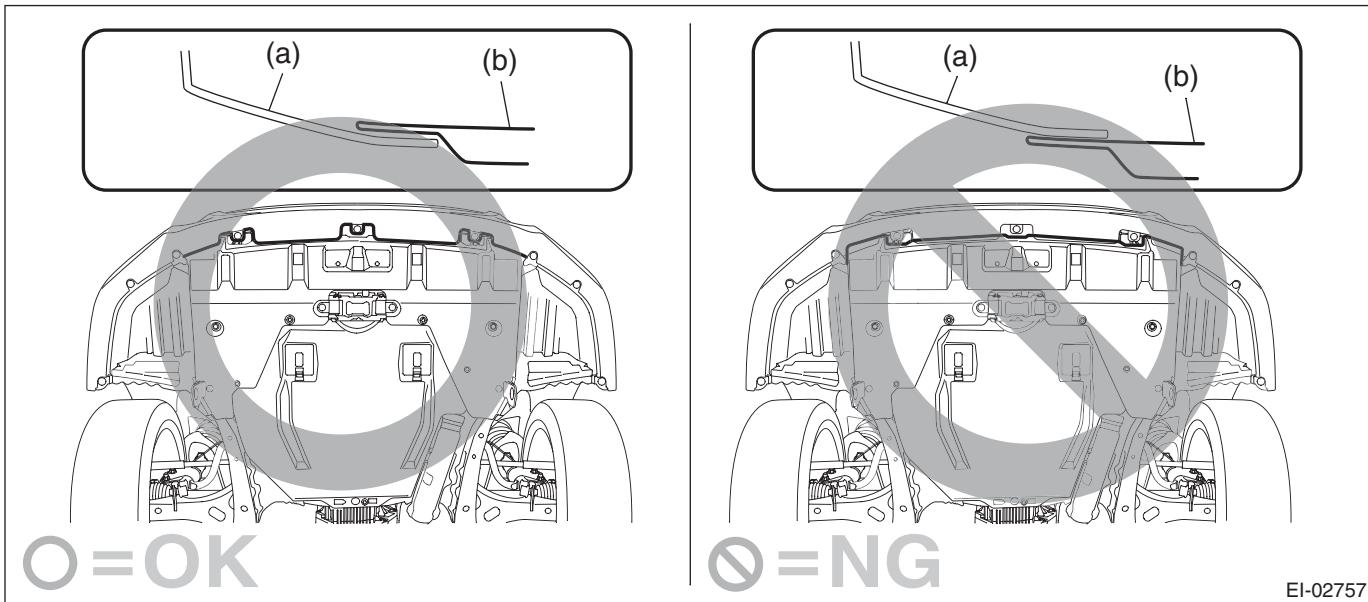

2) Add new washer fluid.

### Tightening torque:

6 N·m (0.61 kgf·m, 4.4 ft-lb)

## Washer Tank and Motor

### WIPER AND WASHER SYSTEMS

---

#### C: INSPECTION

Apply battery voltage to the connector terminal of the washer motor and make sure that the motor operates.

