



## 7. Scalp Cap

### A: REPLACEMENT


- 1) Remove the outer mirror. <Ref. to GW-14, REPLACEMENT, Outer Mirror.>
- 2) Press in the upper side clips (A) from inside of the outer mirror.

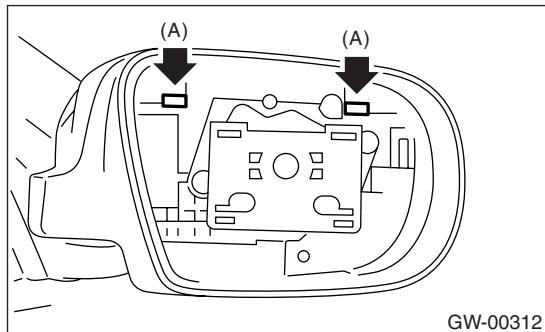

- 3) Pull the scalp cap frontward of outer mirror, remove the upper side clips (A) and lower side hooks (B), and then remove the scalp cap.

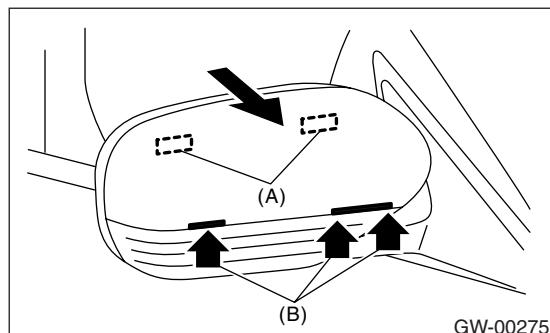

- 4) Insert the lower hooks (B) of scalp cap to outer mirror and push the upper clips (A) in.

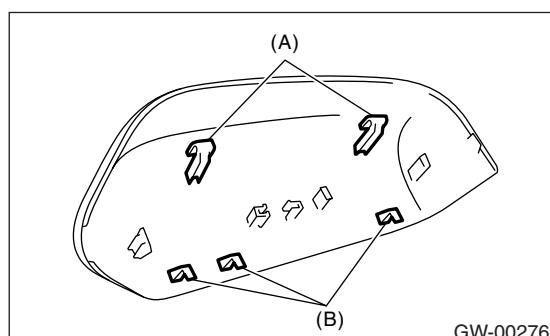

- 5) Install the scalp cap securely.

**CAUTION:**

**Do not remove the scalp cap forcibly. The lower hooks may be damaged.**