


## 15. Front Fog Light Assembly

### A: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Disengage the three clips, and then turn over the lower mud guard.
- 3) Disconnect the harness connector.
- 4) Remove the two mounting bolts, and then detach the fog light assembly by pulling it.

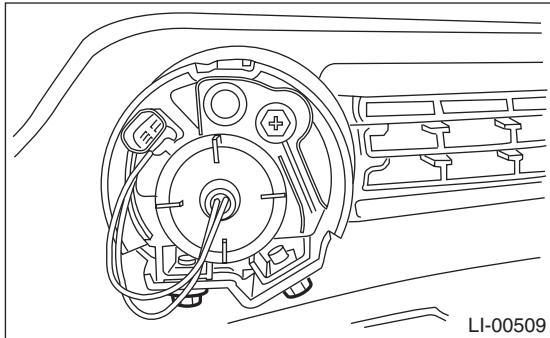

### B: INSTALLATION

Install in the reverse order of removal.