


## 22.Rear Finisher Light Assembly


### A: REMOVAL

1) Remove the bulb inspection cover of the rear gate trim.

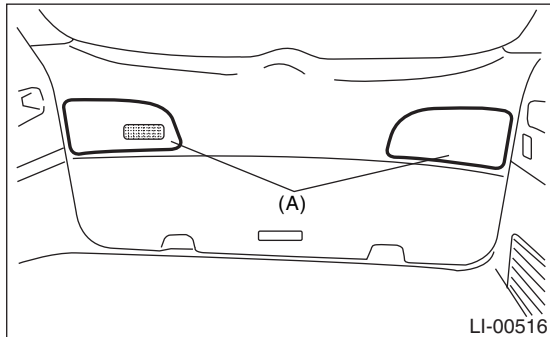

2) Disconnect the harness connector.

3) Remove the mounting nuts and detach the rear finisher assembly.

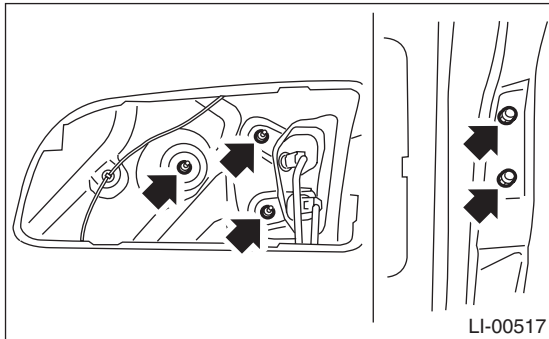

### B: INSTALLATION

Install in the reverse order of removal.