


## 12.Woofer

### A: REMOVAL

- 1) Disconnect the ground cable from the battery.
- 2) Remove the quarter trim. <Ref. to EI-47, REMOVAL, Rear Quarter Trim.>
- 3) Remove the woofer bracket mounting screws.

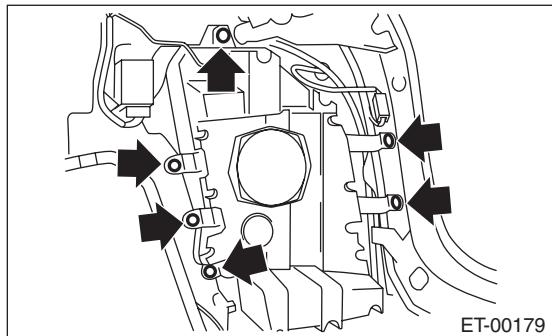

- 4) Disconnect the harness connector and detach the woofers.

### B: INSTALLATION

Install in the reverse order of removal.