



23. Rear Finisher Light Assembly

A: REMOVAL

- 1) Remove the bulb inspection cover of the rear gate trim.

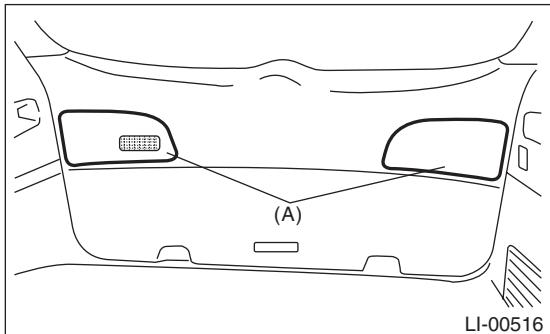

- 2) Disconnect the harness connector.
- 3) Remove the mounting nuts and detach the rear finisher assembly.

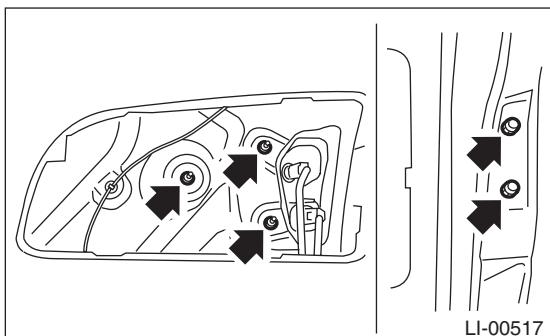

B: INSTALLATION

Install in the reverse order of removal.