

## 5. Airbag Connector


### A: PROCEDURE

#### 1. BUCKLE SWITCH

1) How to disconnect:

(1) Move the slide lock (A) in the direction of arrow.

(2) While holding the slide lock (A) in moved position, disconnect the connector.

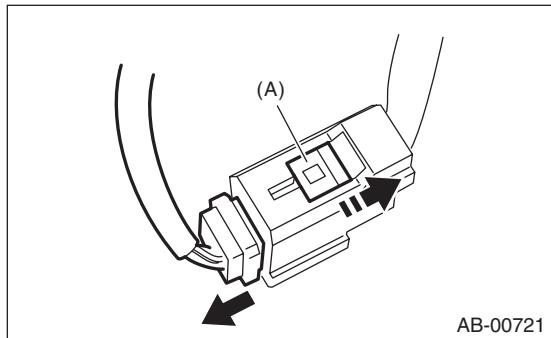


**CAUTION:**

**When pulling the slide lock or disconnecting connector, be sure to hold the connector, not the harness.**

2) How to connect:

Holding the connector (A), and push it in carefully until a clicking sound is heard.

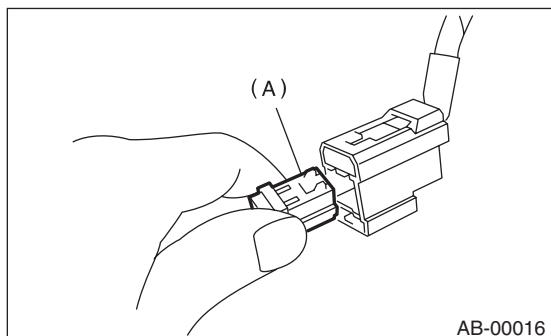

**CAUTION:**

**Be sure to insert the connector in until it is locked. Then pull it gently to make sure that it is locked.**