


## 11. Tweeter


### A: REMOVAL

#### 1. FRONT

- 1) Disconnect the ground cable from the battery.
- 2) Remove the front door trim. <Ref. to EI-36, REMOVAL, Door Trim.>
- 3) Remove the side deflector duct.

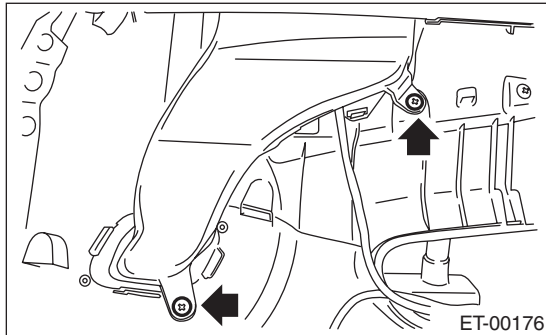


- 4) Remove the tweeter mounting screws.

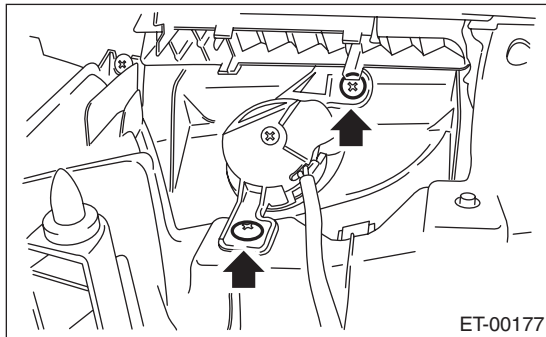

- 5) Remove the tweeter.

#### 2. REAR

- 1) Disconnect the ground cable from battery.
- 2) Remove the tweeter from the roof trim.

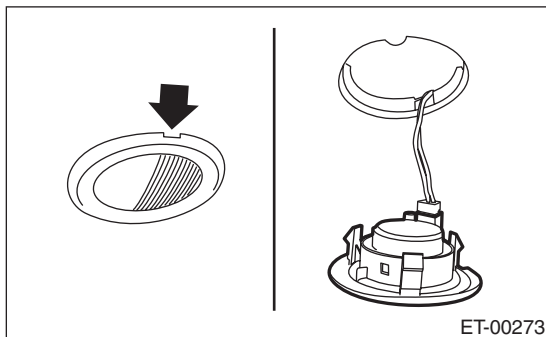

- 3) Disconnect the harness connector.

### B: INSTALLATION

Install in the reverse order of removal.