



## 3. Front Fender

### A: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Remove the side sill garnish. <Ref. to EI-32, REMOVAL, Side Garnish.>
- 3) Remove the front bumper. <Ref. to EI-22, REMOVAL, Front Bumper.>
- 4) Remove the headlight assembly. <Ref. to LI-15, REMOVAL, Headlight Assembly.>
- 5) Remove the mud guard. <Ref. to EI-20, REMOVAL, Mud Guard.>
- 6) Remove the clip (A) and remove the cowl panel side.

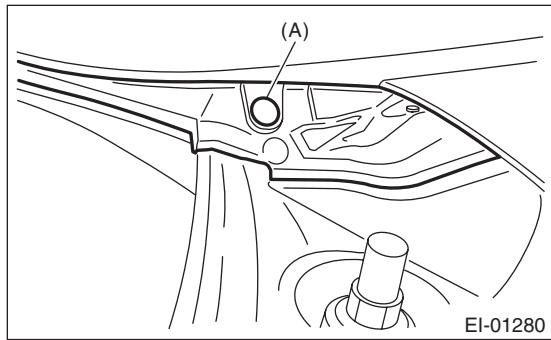

- 7) Remove the bolt, and remove the front fender panel.

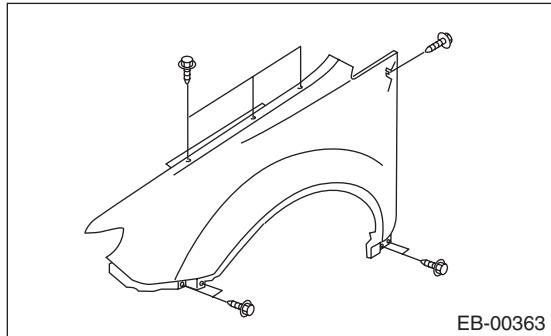

### B: INSTALLATION

- 1) Install in the reverse order of removal.
- 2) Install with attention to make uniform clearance between front fender panel and front hood panel. For the dimension of clearance, refer to "SPECIFICATION" in "General Description". <Ref. to EB-2, SPECIFICATION, General Description.>

***Tightening torque:***

**7.4 N·m (0.75 kgf·m, 5.5 ft-lb)**