


12. Control Panel


A: REMOVAL

1. FRONT

- 1) Disconnect the ground cable from the battery.
- 2) Remove the front console panel. <Ref. to ET-13, REMOVAL, Audio.>
- 3) Remove the instrument panel ornament and the driver's side and passenger's side inner panels.

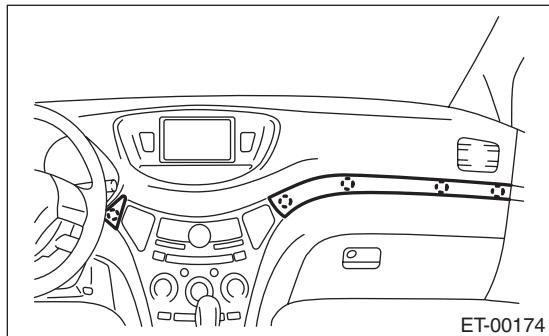

- 4) Remove the screws, and pull out the control panel.

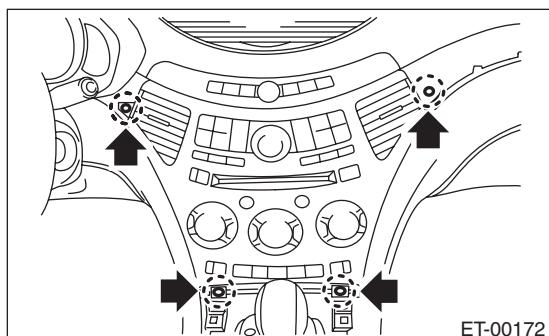

- 5) Disconnect the harness connectors and remove the front control panel.

2. REAR

- 1) Disconnect the ground cable from the battery.
- 2) Pull out the storage box from underneath the rear control panel.
- 3) Push out the panel from the back side.
- 4) Detach the connectors and remove the rear control panel.

B: INSTALLATION

Install in the reverse order of removal.