


### 39. Vanity Mirror Light


#### A: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Insert a screwdriver at the edge of the lens, and remove the lens.

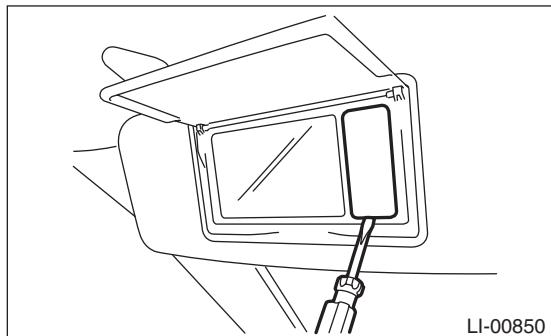

LI-00850

- 3) Remove the bulb.

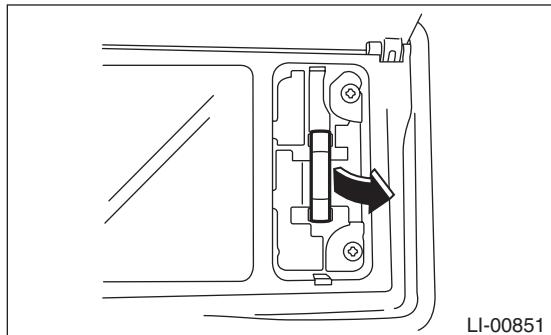

LI-00851

#### B: INSTALLATION

Install in the reverse order of removal.

#### C: INSPECTION

- 1) Visually check the bulb for blow out.
- 2) Check the bulb specification.  
<Ref. to LI-2, SPECIFICATION, General Description.>
- 3) If NG, replace the bulb with a new part.

## **Vanity Mirror Light**

LIGHTING SYSTEM

---

# WIPER AND WASHER SYSTEMS

WW

---

	Page
1. General Description .....	2
2. Wiper and Washer System .....	6
3. Combination Switch (Wiper) .....	7
4. Wiper Blade .....	13
5. Washer Tank and Motor .....	15
6. Wiper Relay Unit .....	17
7. Front Wiper Arm .....	18
8. Front Wiper Motor and Link .....	19
9. Front Washer Nozzle .....	20
10. Rear Wiper Arm .....	21
11. Rear Wiper Motor .....	22
12. Rear Washer .....	23