


14. Power Amplifier

A: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Remove the second row seats. <Ref. to SE-15, REMOVAL, Second Seat.>
- 3) Disconnect the harness connector.
- 4) Remove the nut and remove the power amplifier.

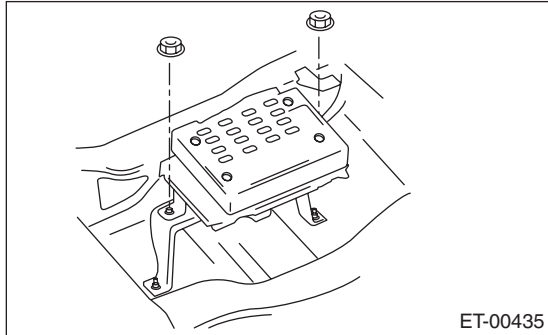

B: INSTALLATION

Install in the reverse order of removal.