



COWL TOP SIDE PANEL (ASSY) REPLACEMENT

1. REMOVE COWL TOP SIDE PANEL

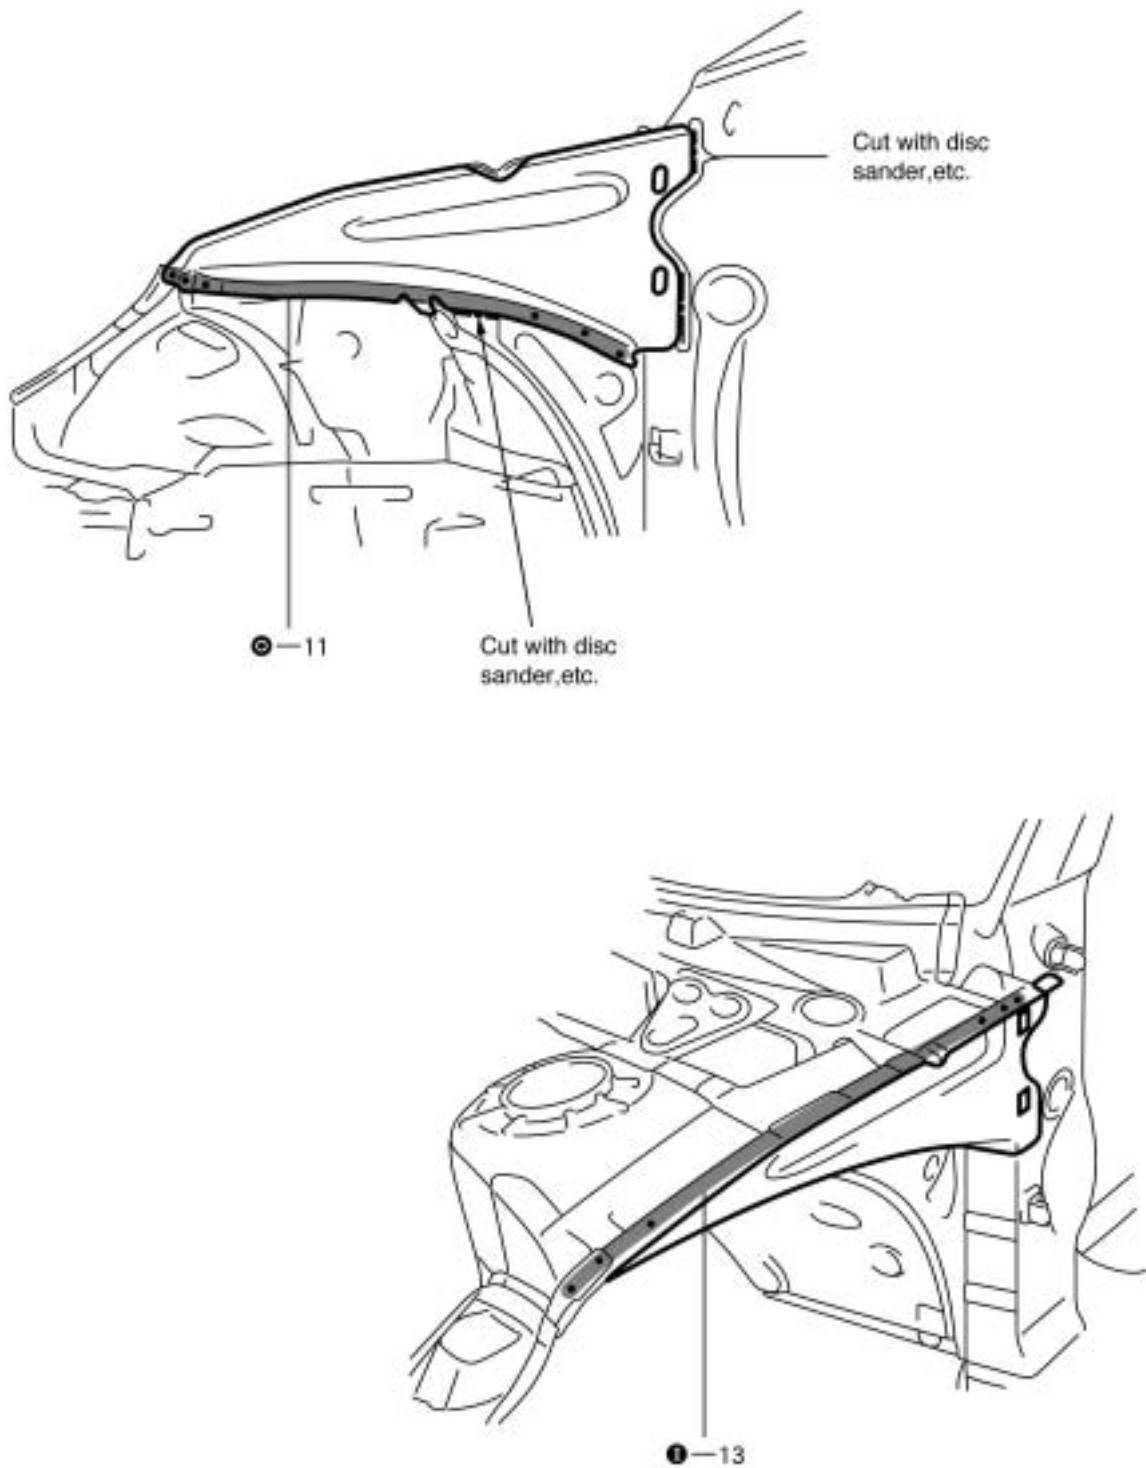

2. INSTALL COWL TOP SIDE PANEL

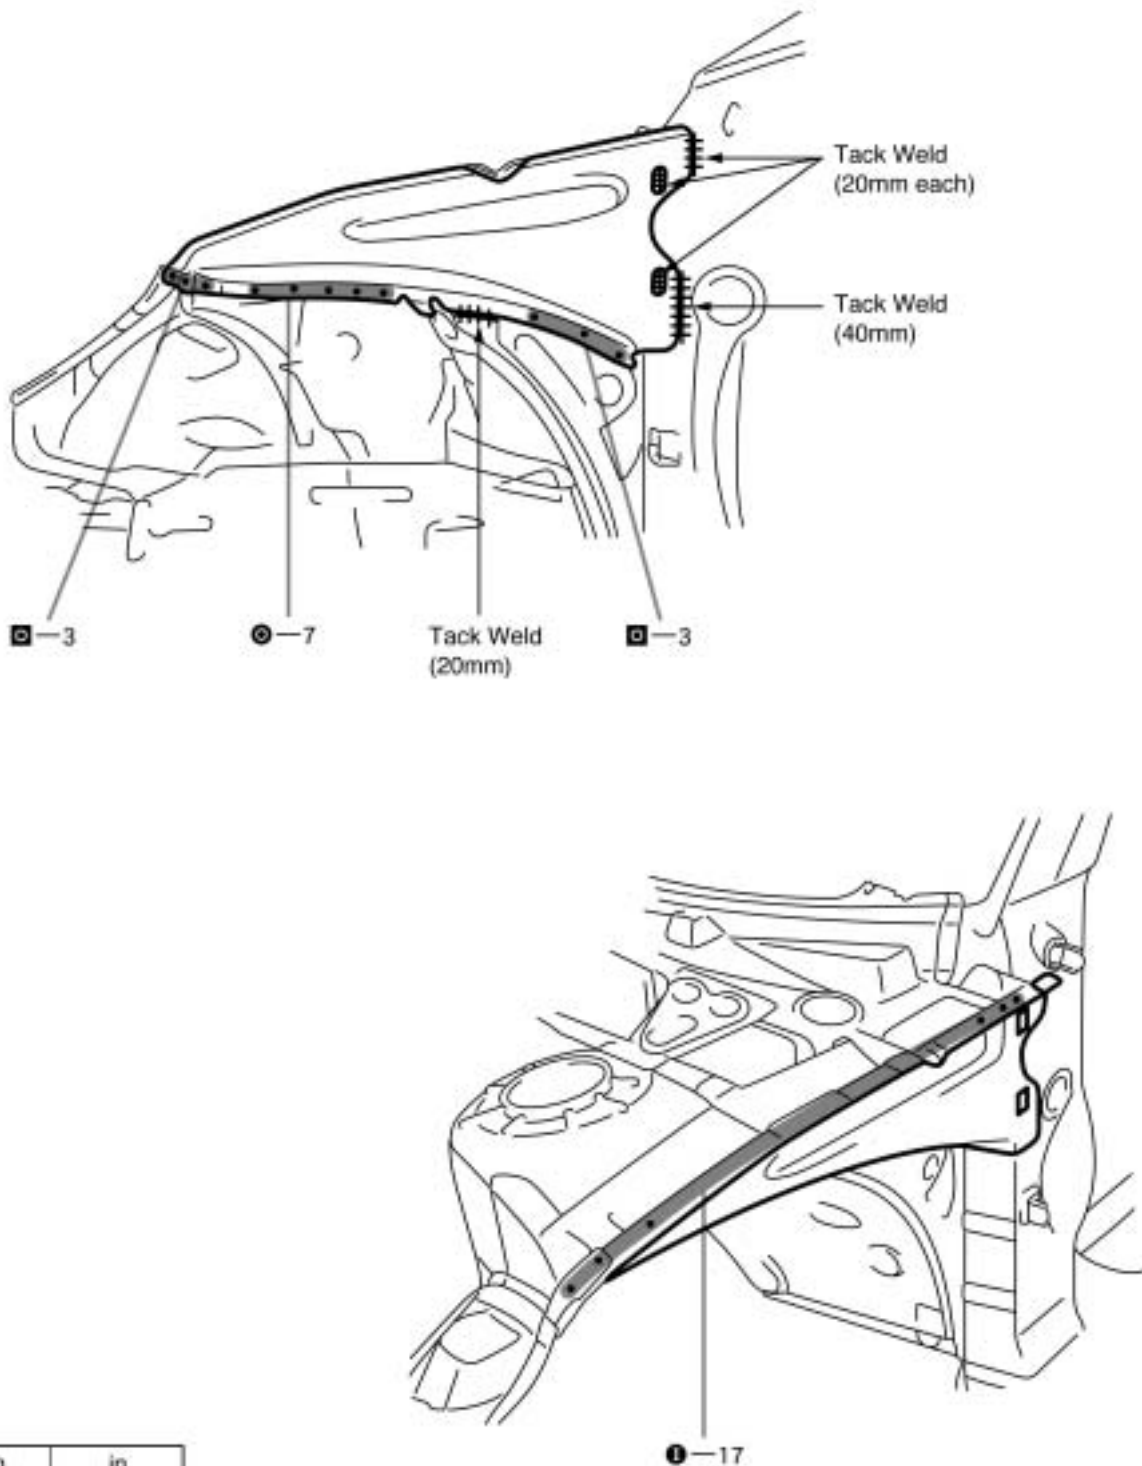

mm	in.
20	0.79
40	1.57

F10312A

3. APPLYING ANTI-RUST AGENT

- After applying the top coat layer, apply the anti-rust agent to the inside of the necked section structural weld spots.