

DTC	P0133/21	Oxygen Sensor Circuit Slow Response (Bank 1 Sensor 1)
------------	-----------------	--

CIRCUIT DESCRIPTION

Refer to DTC P0125/91 (Insufficient Coolant Temp. for Closed Loop Fuel Control) on [page DI-53](#).

DTC No.	DTC Detecting Condition	Trouble Area
P0133/21	Response time for heated oxygen sensor voltage output to change from rich to lean, or from lean to rich, is 120 sec. or more during idling after engine is warmed up (2 trip detection logic)	• Air induction system • Fuel pressure • Injector injection • Open or short in heated oxygen sensor circuit • Heated oxygen sensor • Engine ECU

HINT:

Sensor 1 refers to the sensor closer to the engine body.

WIRING DIAGRAM

Refer to DTC P0125/91 (Insufficient Coolant Temp. for Closed Loop Fuel Control) on [page DI-53](#).

INSPECTION PROCEDURE

HINT:

Read freeze frame data using hand-held tester. Because freeze frame records the engine conditions when the malfunction is detected, when troubleshooting it is useful for determining whether the vehicle was running or stopped, the engine warmed up or not, the air-fuel ratio lean or rich, etc. at the time of the malfunction.

1	Are there any other codes (besides DTC P0133/21) being output?
----------	---

YES

Go to relevant DTC chart ([See page DI-18](#)).

NO

2 Check output voltage of oxygen sensor during idling.

PREPARATION:

Warm up the oxygen sensor with the engine speed at 2,500 rpm for approx. 90 sec.


CHECK:

Use the hand-held tester to read the output voltage of the heated oxygen sensor during idling.

OK:

Oxygen sensor output voltage:

Alternates repeatedly between less than 0.35 V and more than 0.55 V (See the following table).

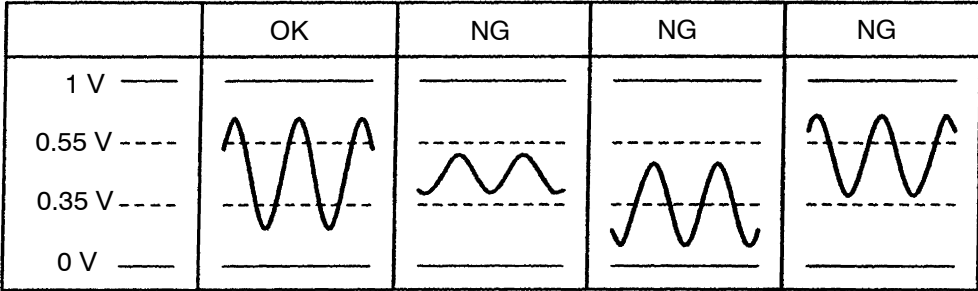

A00292

OK

Go to step 8.

NG

3 Check for open and short in harness and connector between engine ECU and oxygen sensor (See page IN-20).

NG

Repair or replace harness or connector.

OK

4 Check air induction system (See page FI-1).

NG

Repair or replace.

OK

5 Check fuel pressure ([See page FI-6](#)).

NG

Check and repair fuel pump, pressure regulator, fuel pipe line and filter ([See page FI-1](#)).

OK

6 Check injector injection ([See page FI-22](#)).

NG

Replace injector.

OK

Replace oxygen sensor.

7 Perform confirmation driving pattern ([See page DI-53](#)).

GO

8 Is there DTC P0133/21 being output again?

NO

Check for intermittent problems ([See page DI-4](#)).

YES

Check and replace engine ECU ([See page IN-20](#)).