


INSTALLATION

1. INSTALL SEAT TURN TABLE

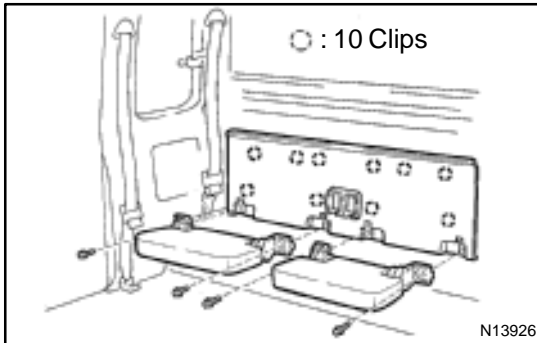


2. INSTALL REAR SEAT CUSHIONS

Install the rear seat cushions with the 4 bolts.

Torque: 9.8 N·m (100 kgf·cm, 7 ft·lbf)

3. INSTALL BACK PANEL LOWER GARNISH

Install the back panel lower garnish to the body.

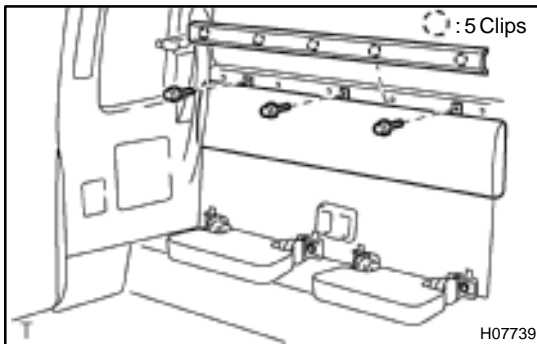

4. INSTALL BACK PANEL UPPER GARNISH AND BACK PANEL TRIM

(a) Install the trim with the 3 bolts.

Torque: 9.8 N·m (100 kgf·cm, 7 ft·lbf)

(b) Install the garnish to the body.