

INSTALLATION

1. INSTALL OIL FILTER BRACKET


- (a) Install a new O-ring and oil filter bracket with the 2 nuts and 3 bolts.

Torque: 19 N·m (194 kgf·cm, 14 ft·lbf)

- (b) Connect the lower radiator hose.

2. INSTALL OIL COOLER

- (a) Clean the contact surface of the oil filter bracket with the cooler mounting.
- (b) Place a new O-ring on the oil cooler.
- (c) Apply a light coat of engine oil to the threads of the union bolt.

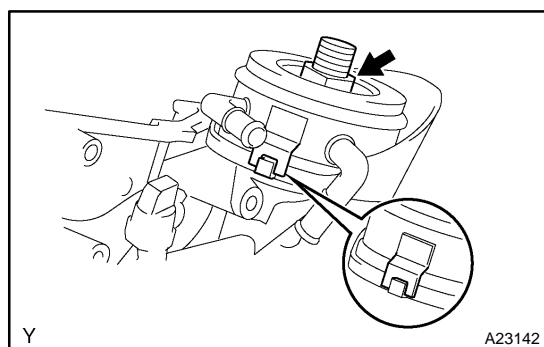

- (d) Install the oil cooler and plate washer with the union bolt.

Torque: 68 N·m (693 kgf·cm, 50 ft·lbf)

- (e) Connect the 2 oil cooler hoses to the oil cooler.

3. INSTALL OIL FILTER

4. ADD ENGINE COOLANT

5. ADD ENGINE OIL

6. INSTALL V-BANK COVER