

Engine & Cooling

Fuel

Ignition


Electrical

Running gear

Torque settings

Capacities

Notes & Illustrations

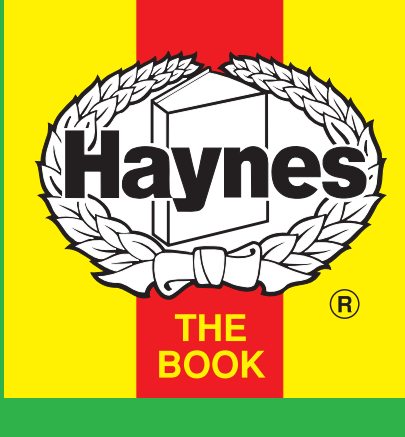

Automotive Technical
DATA BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENU

HELP

Engine and cooling system

100, 2.0 CAT

1991 to 1994

Type	AAE (74kW) SOHC	
Capacity (cm³) / number of cylinders	1984 / 4	
Compression ratio / pressure	bar	9.0 / ≥7.0
Oil pressure	bar	[2.0]
Oil temperature	°C	80
Valve clearance - inlet	mm	0: Hyd.
Valve clearance - exhaust	mm	0: Hyd.
Firing order	1-3-4-2	
No 1 cylinder position	TBE	
Thermostat opening temperature	°C	87
Radiator cap pressure	bar	1.2 to 1.5

Fuel system

100, 2.0 CAT

1991 to 1994

Idle speed - manual [auto]	rpm	750 to 1000 N/A
Fast idle speed - manual [auto]	rpm	—
CO @ idle speed [3000 rpm] - see page VI	%	≤0.5 N/A
HC @ idle speed [3000 rpm] - see page VI	ppm	≤1200
CO2 @ idle speed [3000 rpm] - see page VI	%	—
O2 @ idle speed [3000 rpm] - see page VI	%	—
Carburettor / fuel injection	Bosch	
Type / ref	Mono-Motronic	
Main jet / needle	—	
Injection pressure	bar	0.8 to 1.2
Pump pressure	bar	—
Octane rating	RON	91[U]

Ignition system

100, 2.0 CAT

1991 to 1994

Type	DME Motronic	
Ignition coil	Bosch	
Primary resistance	ohms	0.50 to 1.50
Ballast resistor	ohms	—
Voltage - Tmnl 15(+) to earth	V	—
Distributor	Bosch	
Points gap (air gap)	mm	—
Dwell angle	° (%)	—
Condenser capacity	µF	—
Rotation	Clockwise	
Ignition timing - basic [static	° Crankshaft @ rpm	6±1 BTDC @ 750 to 1000
V = Vacuum NV = No Vacuum	NV	
Total ignition advance	° Crankshaft @ rpm	4 to 8 BTDC @ 780 to 900
	° Crankshaft @ rpm	—
	° Crankshaft @ rpm	—
Centrifugal check.	° Crankshaft @ rpm	Computer control
	° Crankshaft @ rpm	—
	° Crankshaft @ rpm	—
Vacuum range check	mbar	Computer control
Maximum vacuum advance	° Crankshaft	—
Spark plugs	NGK	
Type	BUR6ET	
Electrode gap	mm	0.70 to 0.90

Electrical system

100, 2.0 CAT

1991 to 1994

Battery	V / CC / RC	12 / 50Ah
Alternator voltage / full load current / engine rpm	12.5 to 14.5 / 90 / 2000	
Starter motor current / voltage - cranking	A / V	—
- locked	A / V	—

Running gear

100, 2.0 CAT

1991 to 1994

Brakes -		
Front (min. friction material thickness)	mm	2.0
Rear (min. friction material thickness)	mm	2.5. Disc: 2.0

Tyres		
Saloon	Size	195/65x15: 205/60x15 ¹
Estate / Van	Size	195/65x15: 205/60x15 ¹
Pressure - front / rear - Saloon	bar	1.9 / 1.9 ²
- Estate / Van	bar	1.9 / 1.9 ²

Front suspension / wheel alignment		
Toe-in (+) / Toe-out (–)	mm [°]	[+15'+5'-10']
Camber	-40'+35'-25'. Sports: -50' ³	
Castor	+1°10'±40'. 4x4: +55'±40' N/A	
King pin inclination	—	

Rear suspension / wheel alignment		
Toe-in (+) / Toe-out (–)	mm [°]	[+20'±10']. 4x4: [+10'±10']
Camber	-50'±30'. 4x4: -15'±15'	

Torque wrench settings

100, 2.0 CAT

1991 to 1994

Cylinder head - stage 1	Nm	40 N
- stage 2	Nm	60
Cylinder head - stage 3	Nm	+ 90°
- stage 4	Nm	+ 90°
Big-end bearings	Nm	30 + 90°
Main bearings	Nm	65
Clutch cover	Nm	25
Flywheel [driveplate]	Nm	30 + 90° N
Front hubs	Nm	200 + 90°
Rear hubs	Nm	WSM
Wheel nuts / bolts	Nm	110
Spark plugs	Nm	25 to 30

Capacities


100, 2.0 CAT

1991 to 1994


Engine oil & filter	litres	3.0
Gearbox - 4-speed [5-speed]	litres	2.4. 4x4: 2.85
Automatic transmission - refill	litres	3.0
Final drive	litres	AT: 0.75. 4x4: 1.7
Cooling system	litres	7.0
Fuel tank	litres	80

Notes and Illustrations

¹Also 215/60x15
²215/60x15: 1.8 / 1.8
³4x4 Sports: -15'+35'-25'

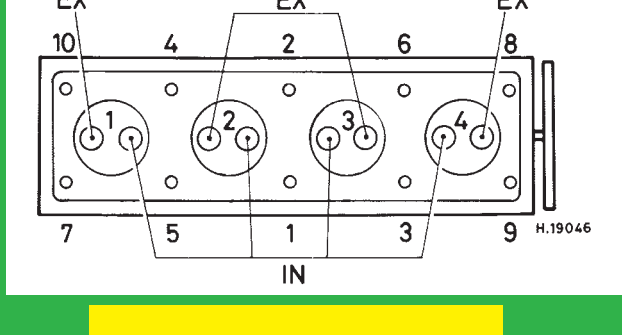

1984 cm³, 8V

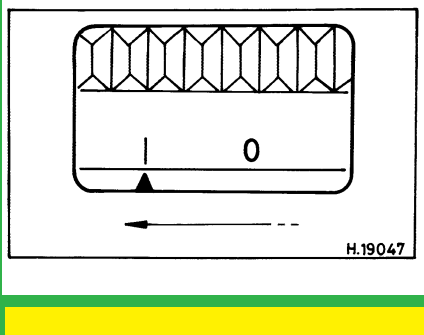

1984 cm³, 8V