

## EVAP System

### DESCRIPTION


When predetermined conditions (closed loop, etc.) are met, the EVAP VSV is opened and stored fuel vapor in the canister is purged to the intake manifold. The ECM changes duty-cycle to the EVAP VSV to control purge flow volume. Purge flow volume is determined by the intake manifold pressure. Atmospheric pressure is allowed into the canister through the vent valve (CCV) to ensure that purge flow is maintained when negative pressure (vacuum) is applied to the canister. This EVAP system contains following components:

### Components

Components	Operation
Canister	Contains activated charcoal to absorb EVAP that is created in fuel tank.
EVAP VSV	Opens or closes line between canister and intake manifold to control EVAP purge flow. EVAP VSV is opened and purges fuel vapor absorbed by canister to intake manifold. ECM changes duty-cycle of purge VSV to control purge volume (ON is open, OFF is closed).
Refueling Valve	Controls EVAP pressure from fuel tank to canister. Valve has diaphragm, spring and restrictor. When fuel tank pressure increase, valve opens. When EVAP is purging, valve closes and restrictor prevents strong of vacuum from affecting pressure in fuel tank. When valve opens, refueling is possible.
Service Port	Used for connecting vacuum gauge for inspecting EVAP system.
Vent Valve (CCV)	Vents and seals EVAP system. When CCV is turned ON, EVAP system is closed. When CCV is turned OFF, EVAP system is vented. When vacuum introduction, EVAP VSV is opened and CCV is closed.
Fuel Tank Pressure (FTP) Sensor	Indicates pressure as voltage. 5 V is supplied by ECM. ECM detects EVAP system pressure using this voltage.

ES

### DIAGRAM

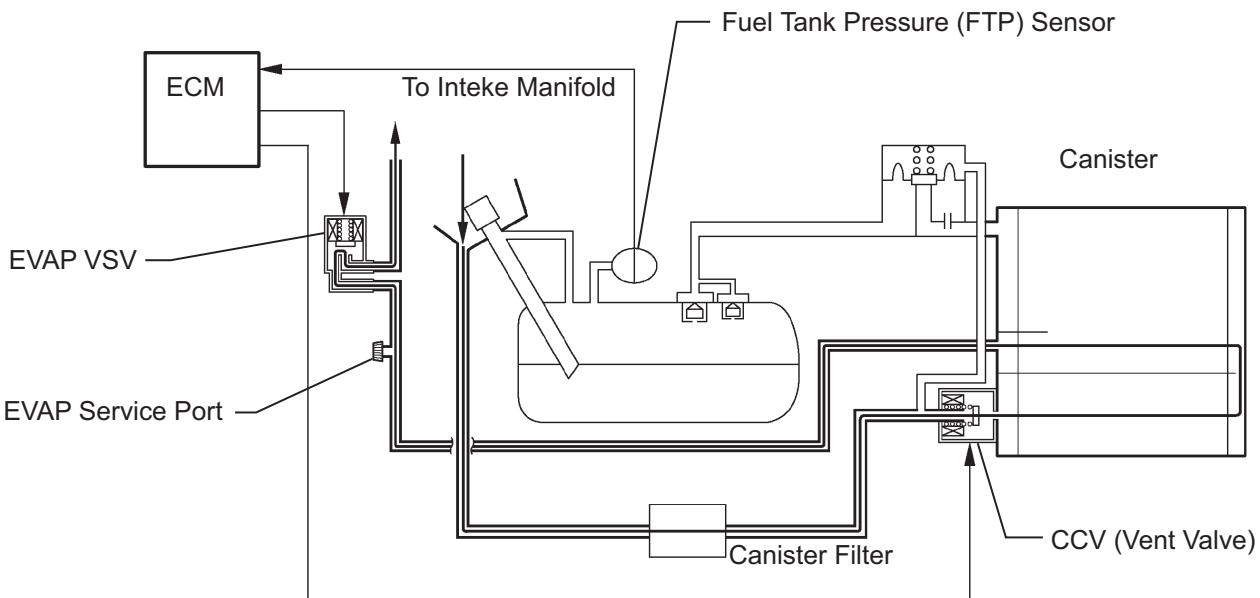

A085820E01


### MONITOR DESCRIPTION

The EVAP monitor's purpose is to check for EVAP leaks and EVAP VSV and CCV malfunctions. The monitor performs the check by first introducing the intake manifold's negative pressure (vacuum) to the EVAP system. Then, the monitor records change in the EVAP system's pressure levels. The monitor runs when the following conditions are met:

- The engine coolant and intake air temperatures are 4 to 35°C (40 to 90°F).


- The engine is idling or the vehicle is being driven at a steady speed.
- The fuel tank pressure is stabilized.

### LEV II EVAP Monitor Process

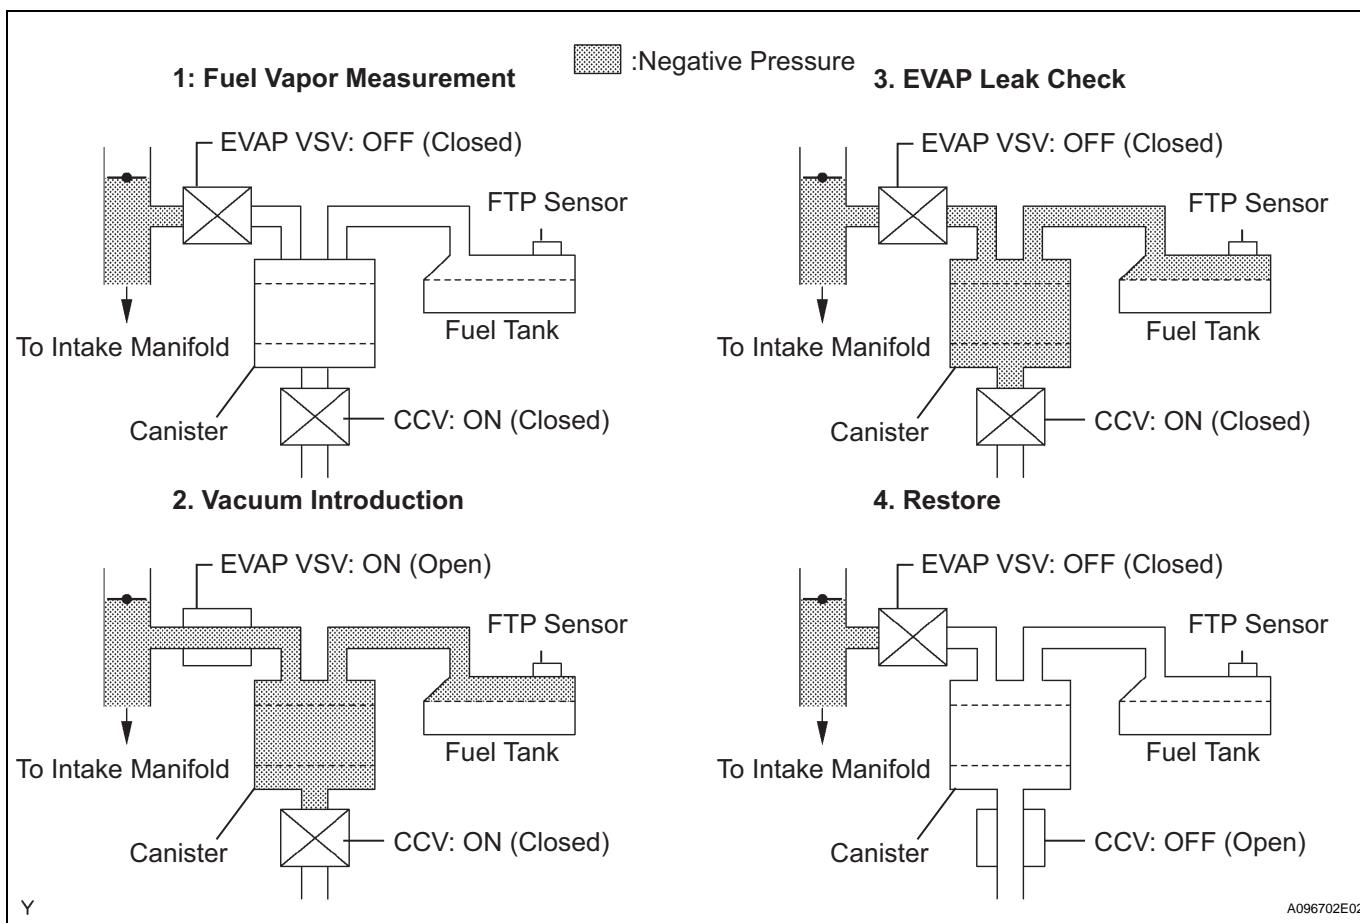

Sequence	Operation	Description
1	Fuel vapor measurement	EVAP VSV is turned OFF (closed) and EVAP pressure is measured. If EVAP pressure is not stable, EVAP monitor is canceled to prevent inaccurate monitor.
2	Vacuum introduction	EVAP VSV is turned ON (open) and CCV is turned ON (closed). As a result, intake manifold pressure (vacuum) is introduced to EVAP system.
3	EVAP leak check	EVAP VSV is turned OFF (closed) to seal EVAP system. EVAP pressure increase is measured for 5 seconds when EVAP pressure is -20 mmHg and -17 mmHg. If increase is large, ECM concludes EVAP system has leak.
4	Restore	CCV is turned OFF (open) to finish EVAP monitor.

## LEV II EVAP Monitor Sequence

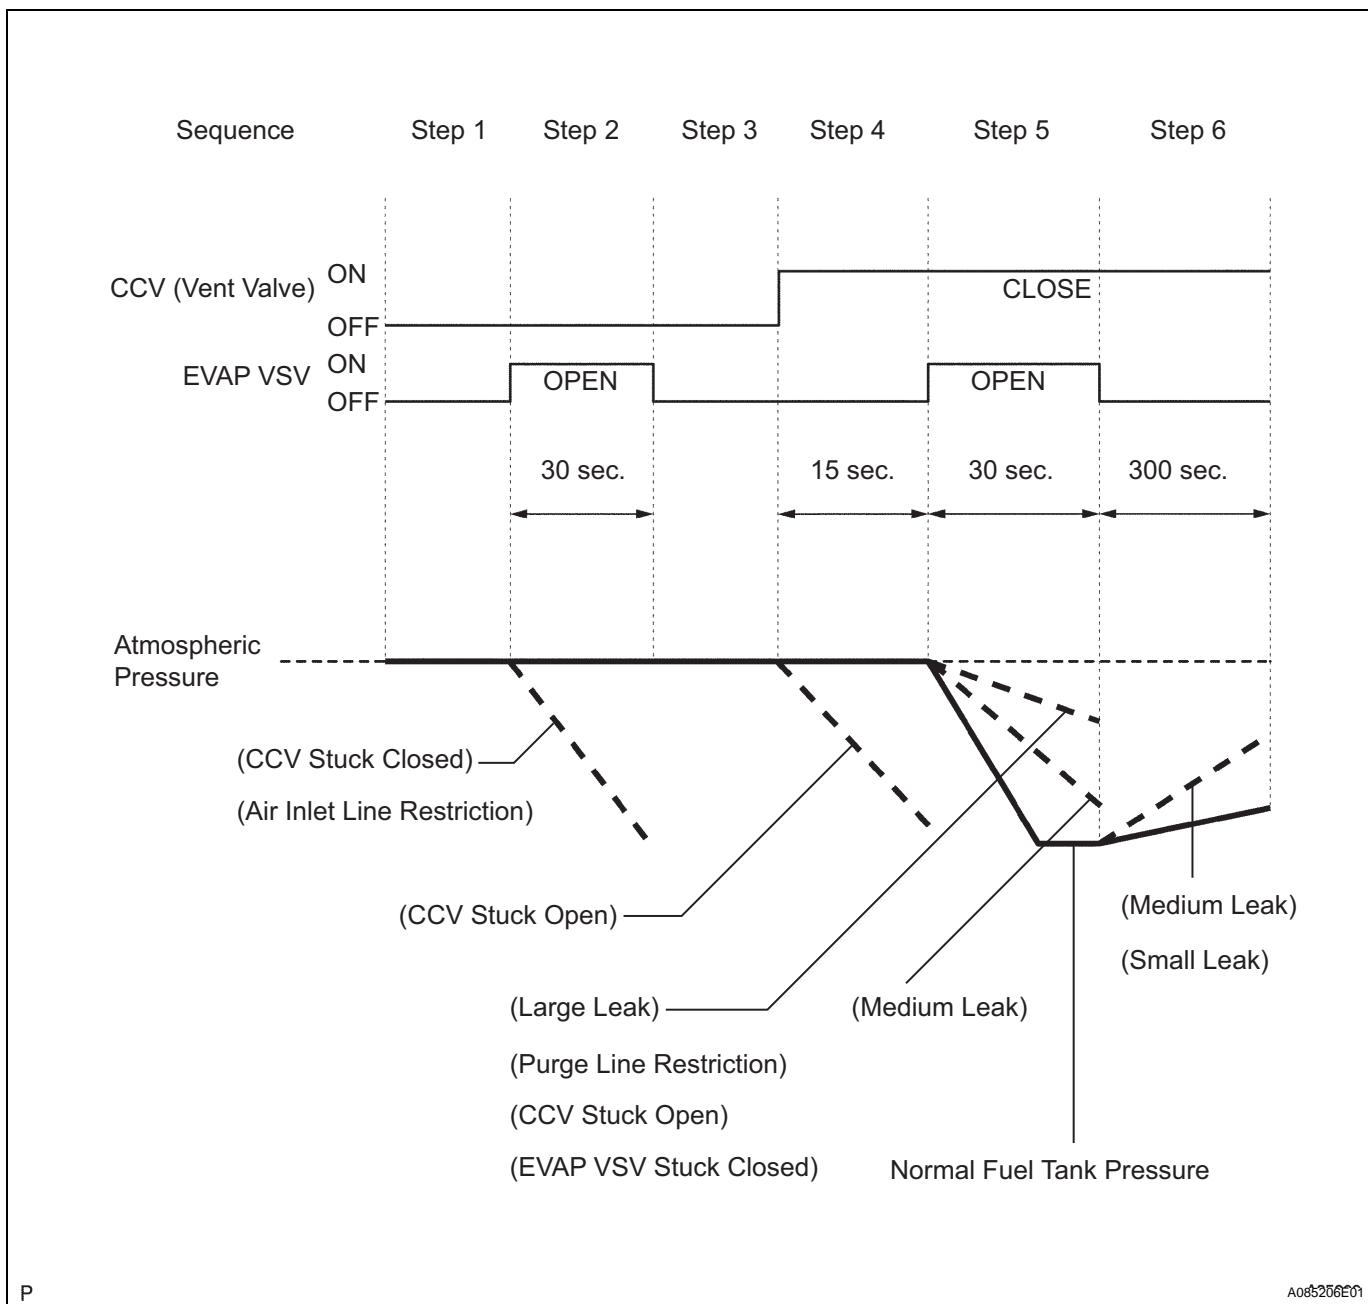


## Related DTCs

DTCs	Monitoring Item
P0441	EVAP VSV stuck closed EVAP VSV stuck open
P0442	EVAP small leak (0.04 inch)
P0446	Vent valve (CCV) stuck closed CCV stuck open
P0451	Fuel tank pressure (FTP) sensor malfunction
P0452	FTP sensor low output
P0453	FTP sensor high output
P0455	EVAP gross leak
P0456	EVAP small leak (0.02 inch)

## WIRING DIAGRAM

V11  
Vapor Pressure Sensor

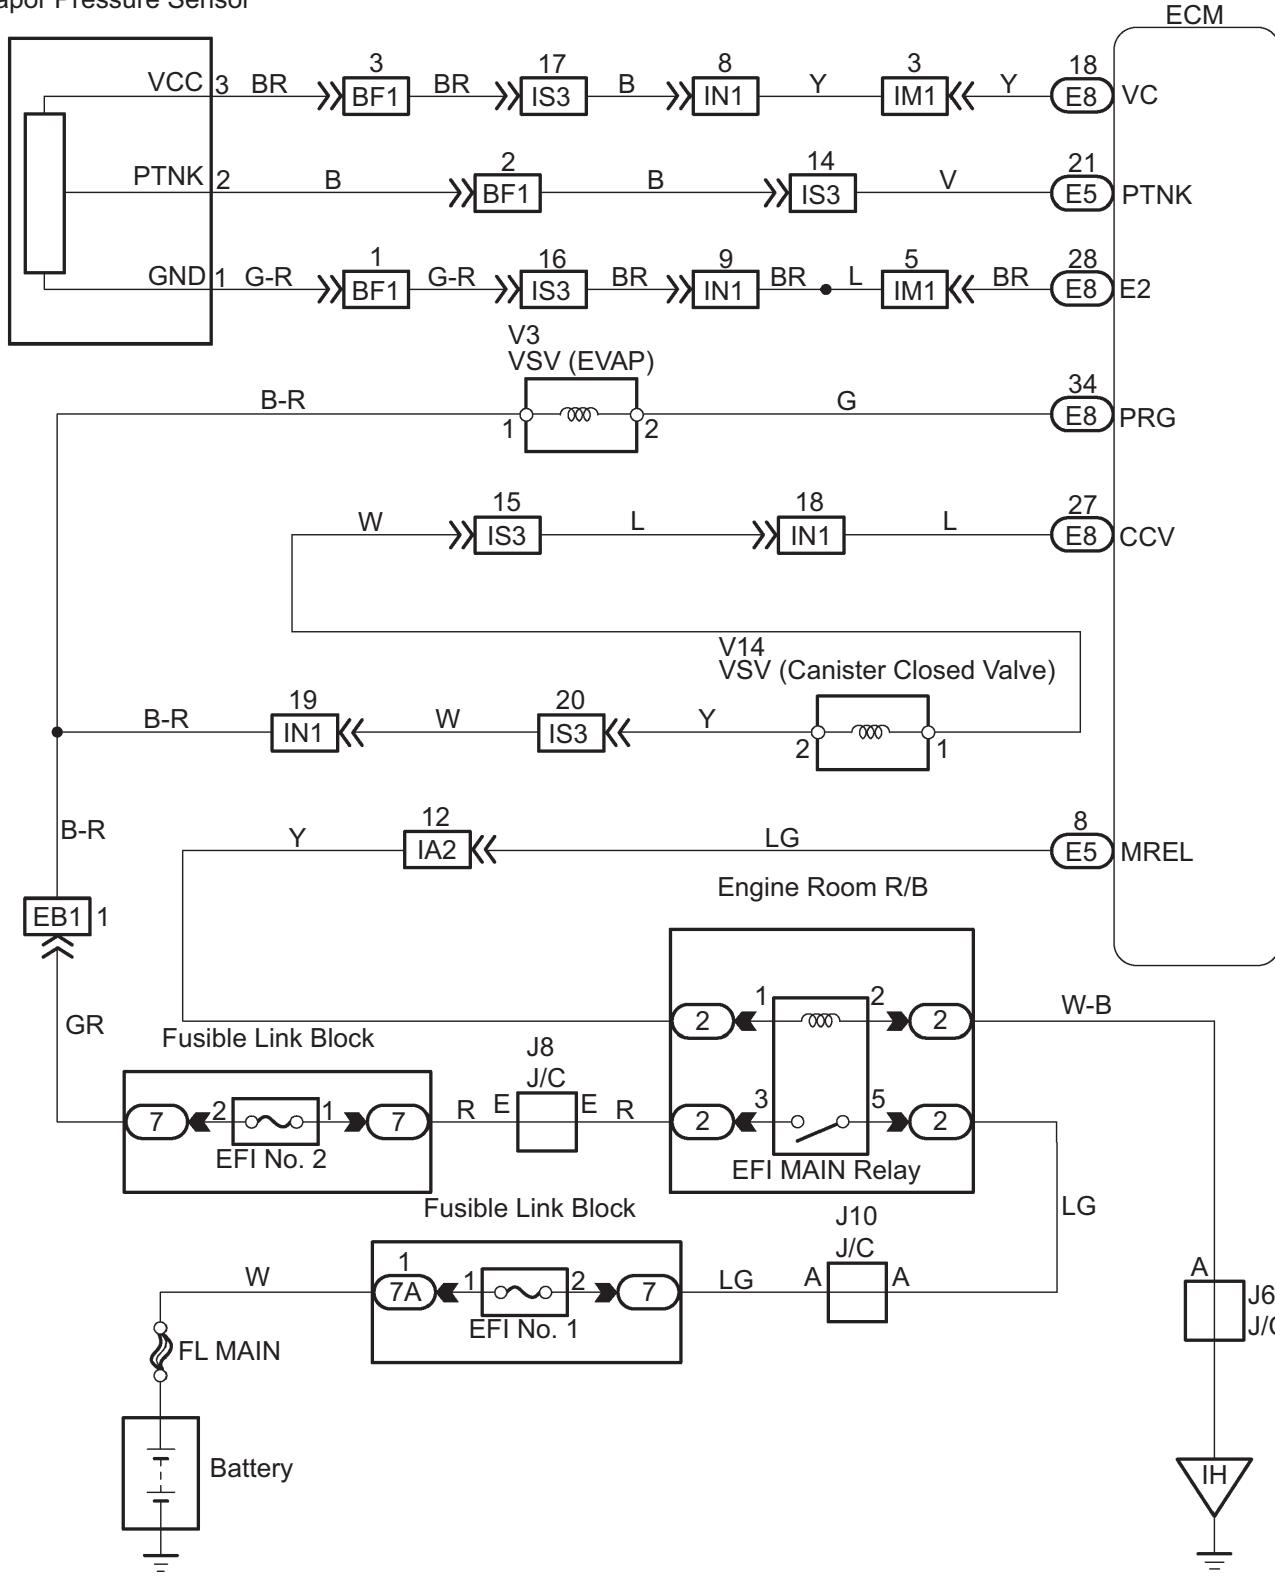

**HINT:**

Read freeze frame data. The ECM records vehicle and driving condition information as freeze frame data the moment a DTC is stored. When troubleshooting, freeze frame data can help determine if the vehicle was running or stopped, if the engine was warmed up or not, if the air-fuel ratio was lean or rich, and other data from the time the malfunction occurred.

<b>1</b>	<b>CHECK OTHER DTC OUTPUT (IN ADDITION TO DTC P041, P0442, P0446 AND/OR P0456)</b>
----------	--

**Result**

Display (DTC output)	Proceed to
Only P0441, P0442, P0446 and /or P0456 are output	A
P0451, P0452 and P453 are output	B

ES

**HINT:**

If any other DTCs besides P0441, P0442, P0446 and/or P0456 are output, perform the troubleshooting for those DTCs first (reference: P0451, P0452, P0453 are vapor pressure sensor malfunctions).

**B****GO TO RELEVANT DTC CHART****A**

<b>2</b>	<b>CHECK CURRENT AND PENDING DTC</b>
----------	--------------------------------------

- Check current DTCs. Select the intelligent tester menus: DIAGNOSIS, ENHANCED OBDII, DTC INFO and CURRENT DTCS.
- Check pending DTCs. Select the intelligent tester menus: DIAGNOSIS, ENHANCED OBDII, DTC INFO and PENDING DTCS.

**Result**

Current DTC	Pending DTC	Conclusion
Set	Set	System has been malfunctioning. Problem can be specified.
Set	-	System was malfunctioning in previous driving cycle. Problem may be specified.
-	Set	System is malfunctioning. This is intermittent problem and caused by fuel tank cap loosening. Otherwise, this problem may be difficult to eliminate.

**HINT:**

- The ECM stores the current DTC and illuminates the MIL when an emission-related component is malfunctioning in 2 consecutive driving cycles (2 trips). The MIL is turned OFF, if the component is functioning normally in 3 consecutive driving cycles. The ECM erases the current DTC, if the component is functioning normally in 40 consecutive driving cycles.
- The ECM stores the pending DTC when the component is malfunctioning in present driving cycle (1 trip).
- The ECM erases the pending DTC, if the component is functioning normally in the next driving cycle.

**NEXT**

<b>3</b>	<b>PREDICT POSSIBLE MALFUNCTION AREA (MANUAL OPERATION)</b>
----------	---

(a) Predict possible malfunction area using the matrix below.

**EVAP DTC Matrix**

Malfunction Area	DTCs
EVAP VSV stuck closed	P0441, P0466, P0455
EVAP VSV stuck open	P0441
EVAP small leak (0.04 inch)	P0442
CCV stuck closed	P0446
CCV stuck open	P0441, P0446, P0455
FTP sensor malfunction	P0451
FTP sensor low output	P0452
FTP sensor high output	P0453
Gross leak	P0441, P0455
EVAP small leak (0.02 inch)	P0442, P0456

DTCs	Suspected Malfunction Area
P0441 only	EVAP VSV stuck open
P0446 only	CCV (vent valve) stuck open
P0442 and/or P0456	Small leak

**NEXT**


<b>4</b>	<b>PERFORM EVAP SYSTEM CHECK</b>
----------	----------------------------------

**NOTICE:**

The EVAP system check can be used for confirmation after the EVAP system repair. Check DTCs after performing the EVAP system check. If no pending DTC is set, the EVAP system is functioning normally and the repair is complete.

- (a) Select the "mmHg" unit. Select the intelligent tester menus: DIAGNOSIS, SETUP, UNIT CONVERSION and VAPOR PRESS.
- (b) Allow the engine to idle.
- (c) Perform the EVAP system check to find a malfunction area. Select the intelligent tester menus: DIAGNOSIS, ENHANCED OBD II, SYSTEM CHECK and LEV II SYS CHECK.
- (d) Read NOTICE and press ENTER.

## Diagram of LEV II EVAP System Check

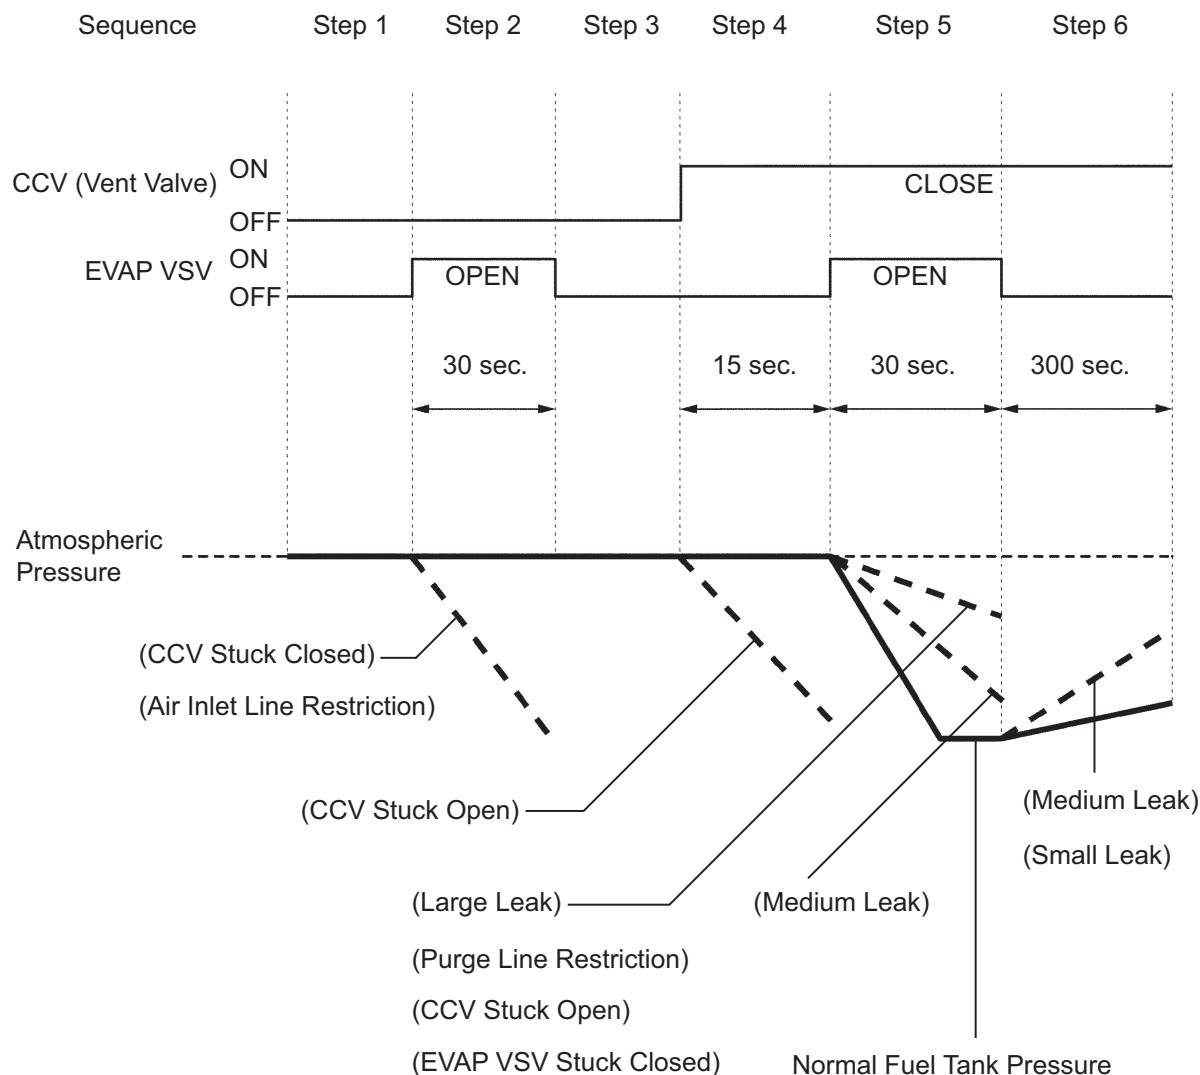

P

A085206E02

## HINT:

The EVAP system check is the most accurate when the following conditions are being set:


- Atmospheric pressure is 762 mmHg (sea level).
- The engine coolant and intake air temperatures are 4 to 35°C (40 to 90°F).
- The fuel tank level is 1/4 to 3/4.

NEXT

5

PERFORM EVAP SYSTEM CHECK STEP 1 (INITIALIZE SYSTEM)

(a) Perform step 1.

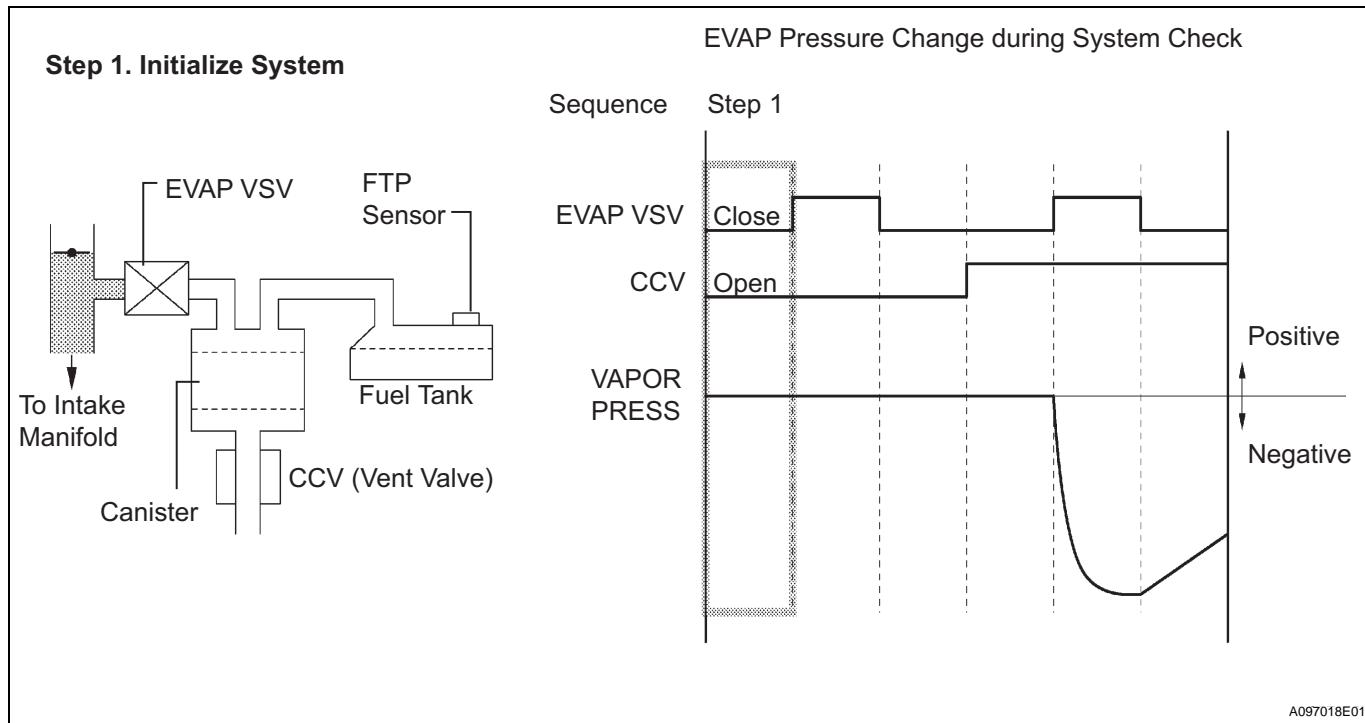

(b) Wait for 30 seconds.

LEVII SYSTEM CHECK  
Step 1. Initialize system  
  
EVAP VSV.....CLOSE  
CCV .....OPEN  
VAPOR PRESS  
.....762 mmHg-a  
Time 030 seconds  
  
Press [RIGHT]



A096682

NEXT

6

PERFORM EVAP SYSTEM CHECK STEP 2 (CHECK FOR CCV)

(a) Press RIGHT to go to step 2.

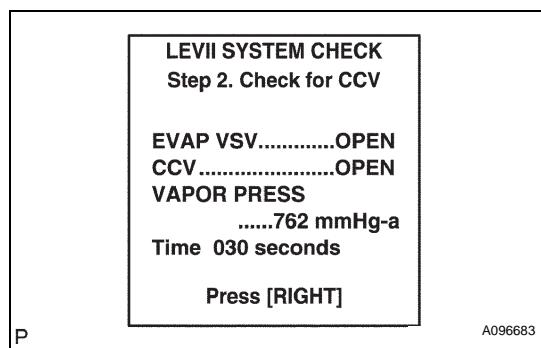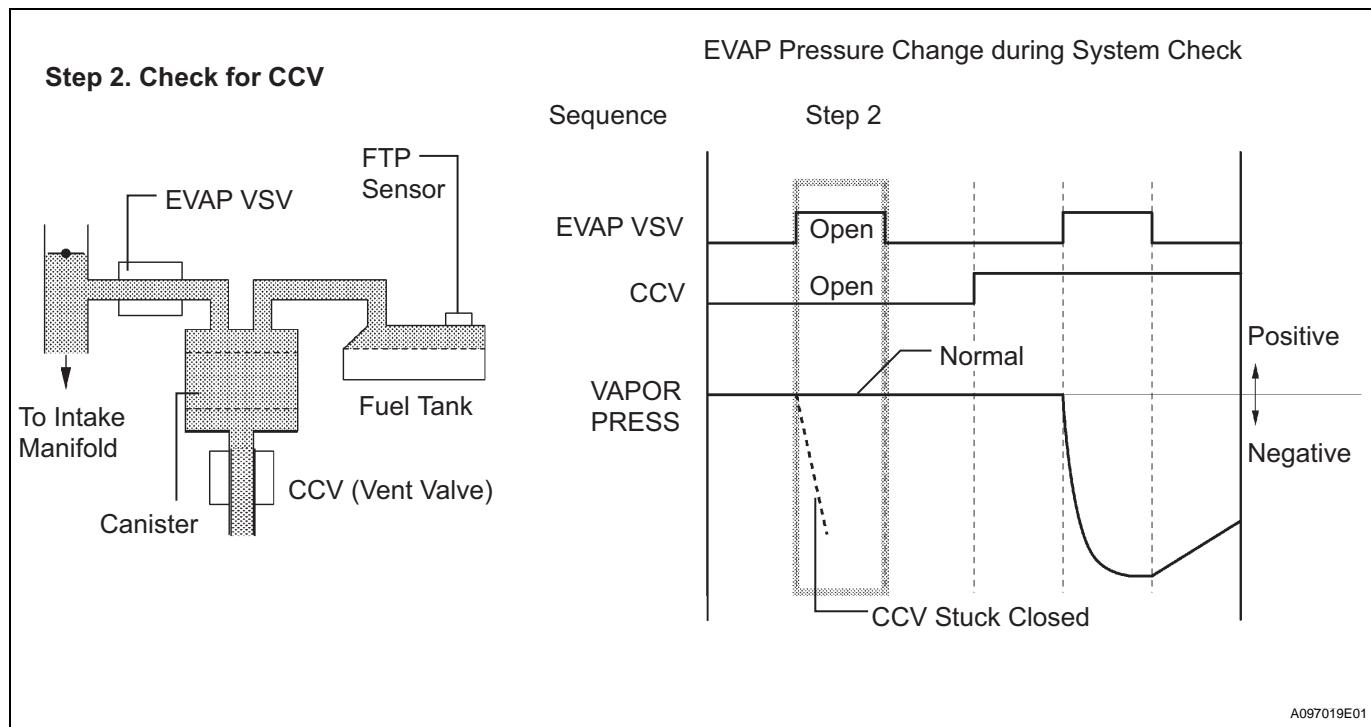

(b) Wait for 30 seconds and check VAPOR PRESS (EVAP pressure).

**Result**

VAPOR PRESS	Conclusion	Proceed to
Higher than 752 mmHg-a (-10 mmHg-g)	Trouble area has not been found yet.	OK
Lower than 752 mmHg-a (-10 mmHg-g)	Following problems are suspected: • Air inlet line restriction • Canister filter restriction • CCV (vent valve) stuck closed	NG

**HINT:**

In this step, the intake manifold pressure (vacuum) is applied to the EVAP system. However, the fuel tank pressure does not drop due to the CCV (vent valve) open.


NG

Go to step 11

OK

**7 PERFORM EVAP SYSTEM CHECK STEP 3 (INITIALIZE SYSTEM)**

(a) Press RIGHT to go to step 3.

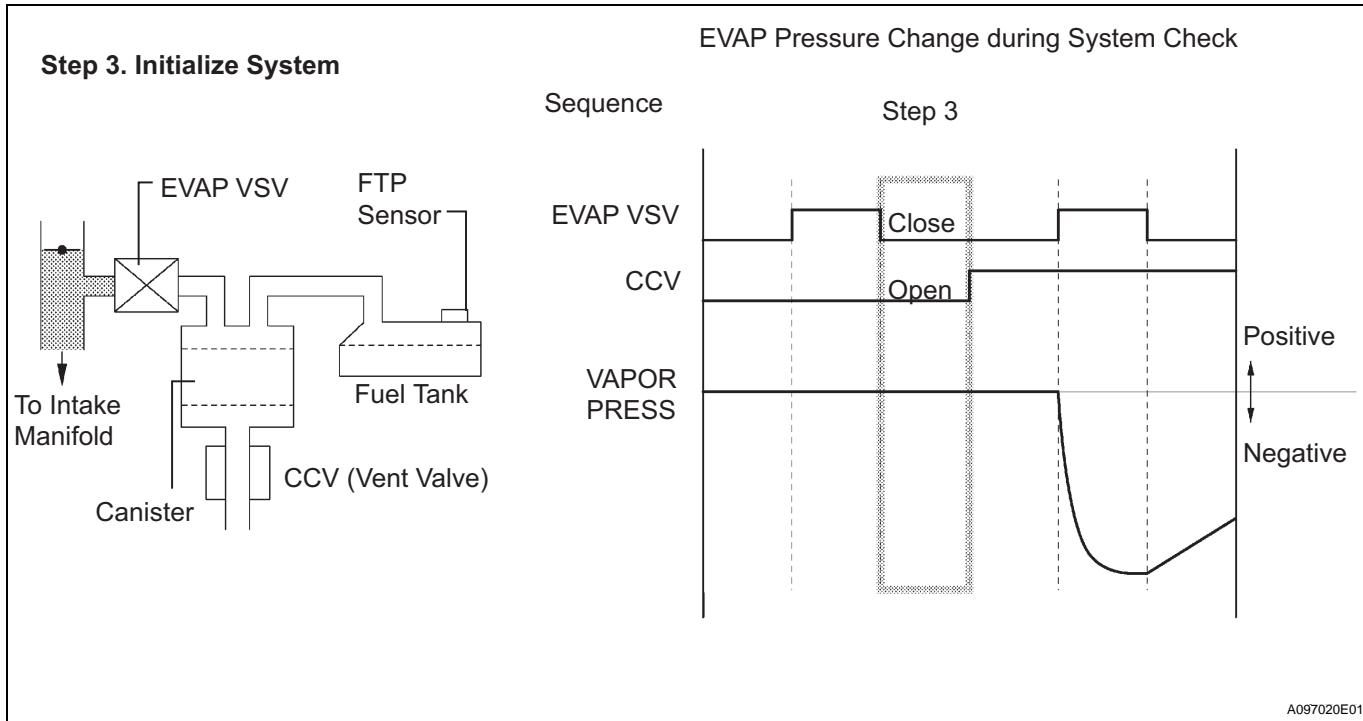

(b) Wait for 30 seconds.

LEVII SYSTEM CHECK  
Step 3. Initialize system  
  
EVAP VSV.....CLOSE  
CCV .....OPEN  
VAPOR PRESS  
.....762 mmHg-g  
Time 030 seconds  
  
Press [RIGHT]

A096684


P

NEXT

8

PERFORM EVAP SYSTEM CHECK STEP 4 (CHECK FOR EVAP VSV STUCK OPEN)

(a) Press RIGHT to go to step 4.

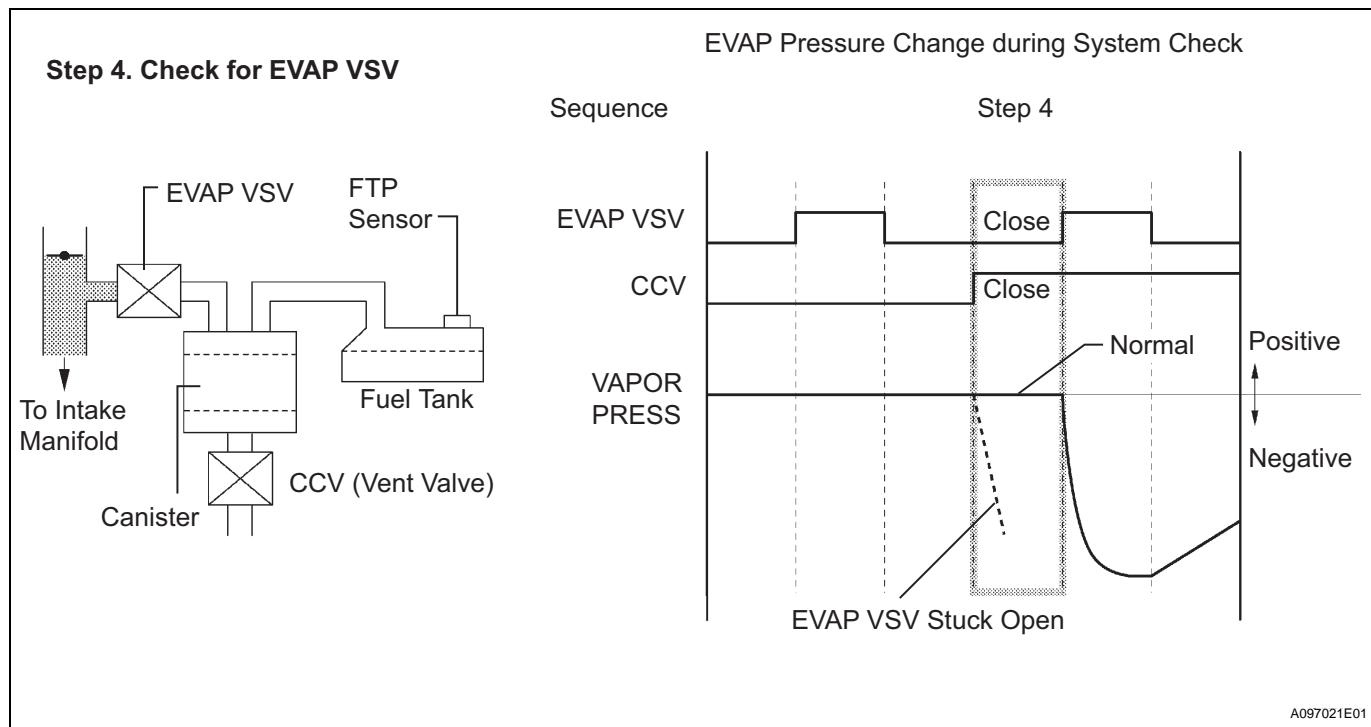

**LEVII SYSTEM CHECK**  
**Step 4. Check for EVAP VSV stuck open**

EVAP VSV.....CLOSE  
 CCV.....CLOSE  
 VAPOR PRESS  
 .....762 mmHg-g  
 Time 015 seconds  
 Press [RIGHT]

(b) Wait for 15 seconds and check VAPOR PRESS (EVAP pressure).

**Result**

VAPOR PRESS	Conclusion	Proceed to
Higher than 758 mmHg-a (-4 mmHg-g)	Trouble area has not been found yet	OK
Lower than 758 mmHg-a (-4 mmHg-g)	EVAP VSV stuck open	NG

**NG**



**Go to step 14**

**OK**


**9**

**PERFORM EVAP SYSTEM CHECK STEP 5 (APPLYING VACUUM)**

(a) Press RIGHT to go to step 5.

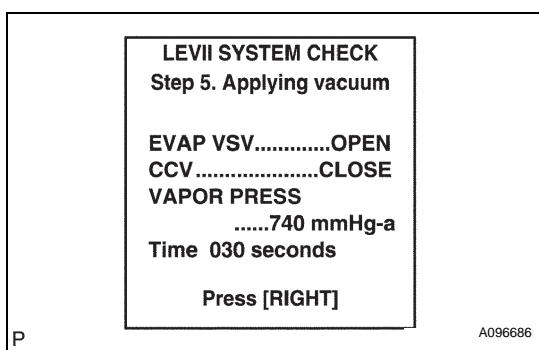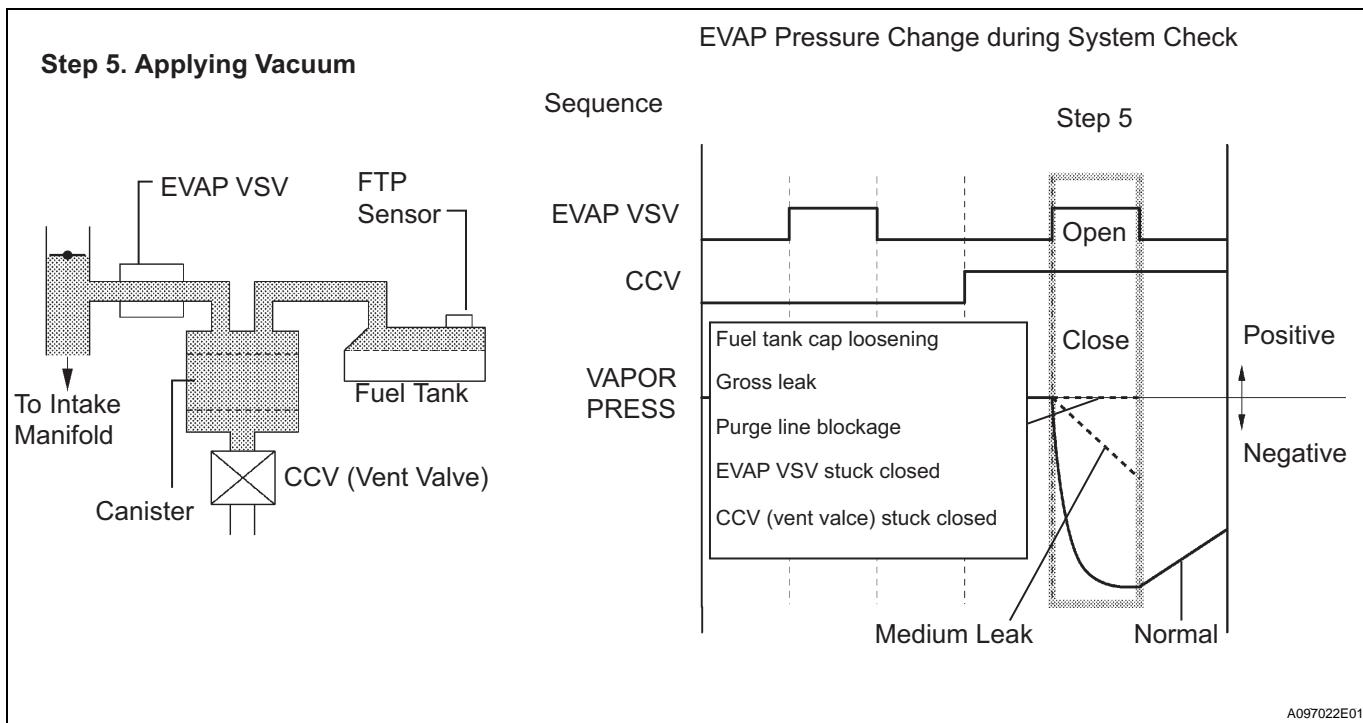

(b) Wait for 30 seconds and check VAPOR PRESS (EVAP pressure).

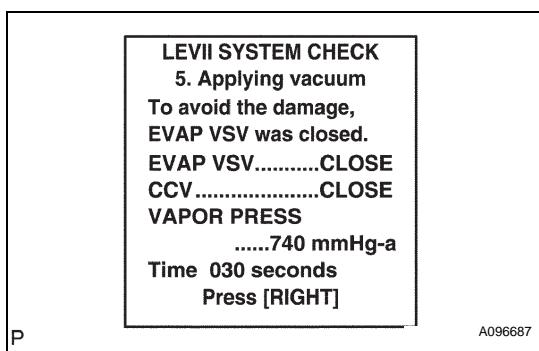

- If the pressure is lower than 740 mmHg-a (-22 mmHg-g), the intelligent tester closes the EVAP VSV.



- If the pressure is lower than 735 mmHg-a (-27 mmHg-g), the intelligent tester cancels the EVAP system check.

### Result

VAPOR PRESS	Conclusion	Proceed to
Lower than 748 mmHg-a (-14 mmHg-g)	Trouble area has not been found yet.	A

VAPOR PRESS	Conclusion	Proceed to
756 to 768 mmHg-a (-6 to 6 mmHg-g)	Following problems are suspected: <ul style="list-style-type: none"> <li>• Fuel tank cap loosening</li> <li>• Gross leak</li> <li>• ?EVAP VSV stuck closed</li> <li>• CCV (vent valve) stuck open</li> <li>• Purge line blockage between fuel tank and canister</li> </ul>	B
748 to 755 mmHg-a (-14 to -7 mmHg-g)	Medium leak	C

B

Go to step 15

C

Go to step 18


A

ES

10

## PERFORM EVAP SYSTEM CHECK STEP 6 (LEAK CHECK FOR EVAP SYSTEM)

(a) Press RIGHT to go to step 6 when the VAPOR PRESS (EVAP pressure) is lower than 742 mmHg-a (-20 mmHg-g).

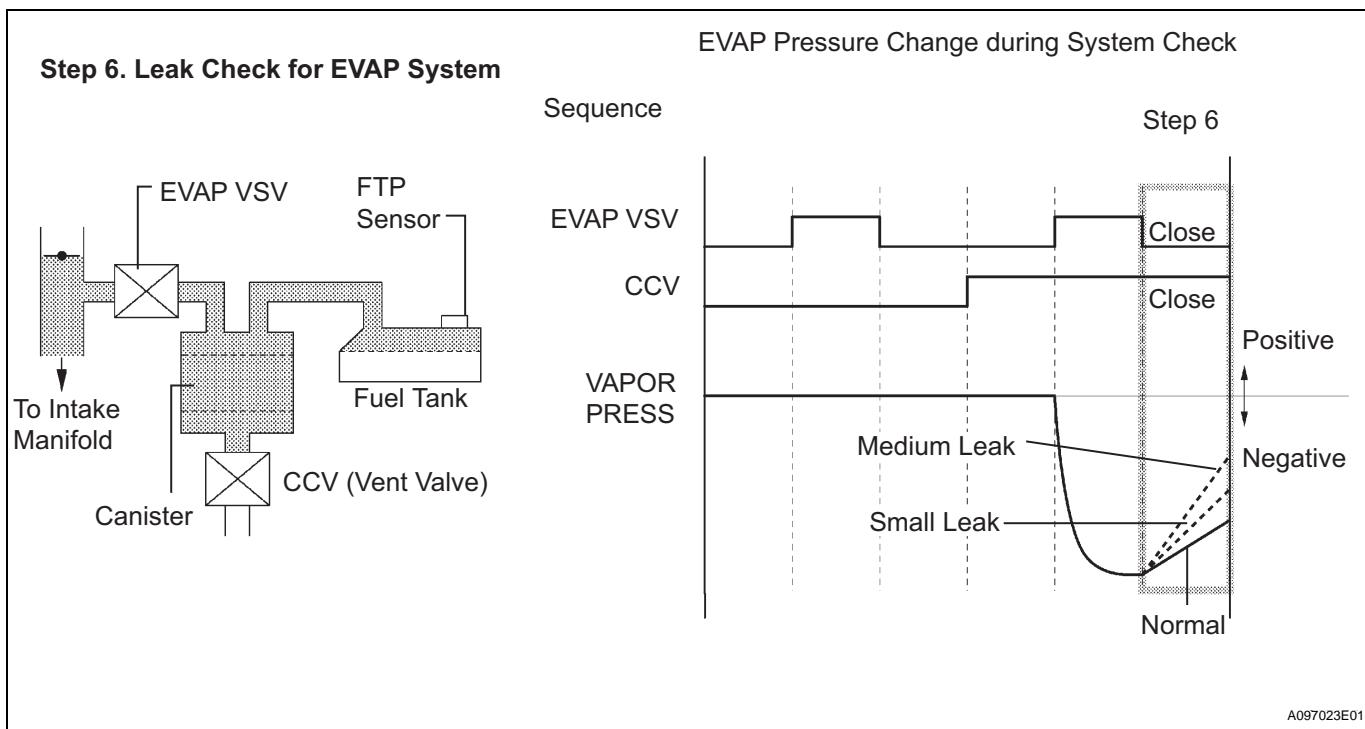

(b) Wait for 300 seconds and check VAPOR PRESS (EVAP pressure).

## Result

VAPOR PRESS	Conclusion	Proceed to
Less than 758 mmHg-a (-4 mmHg-g)	EVAP system is functioning normally	OK
Higher than 758 mmHg-a (-4 mmHg-g)	Leakage	NG

P

LEVII SYSTEM CHECK  
Step 6. Leak check for  
EVAP system  
EVAP VSV.....CLOSE  
CCV .....CLOSE  
VAPOR PRESS  
.....752 mmHg-g  
Time 300 seconds  
Press [RIGHT]

A096688


NG

Go to step 18

OK

GO TO STEP 40

## 11 CHECK CCV

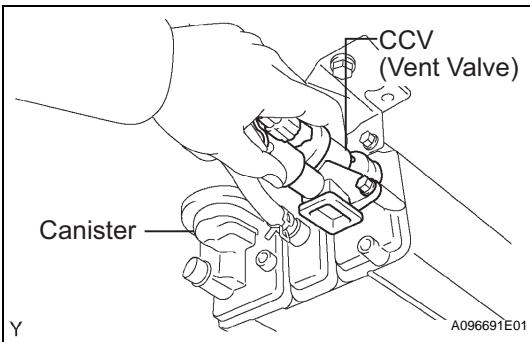

- Turn the ignition switch OFF.
- Turn the ignition switch ON.
- Switch the CCV (vent valve) using the intelligent tester. Select the intelligent tester menus: DIAGNOSIS, ENHANCED OBD II, ACTIVE TEST and CAN CTRL VSV.
- Touch the CCV and check the operation during switching the CCV.

## Result


CCV (Vent Valve)	Conclusion	Proceed to
CCV is operated	CCV is functioning normally.	OK
CCV is not operated	CCV is malfunctioning.	NG

NG

Go to step 25

OK

## 12 CHECK AIR INLET LINE RESTRICTION

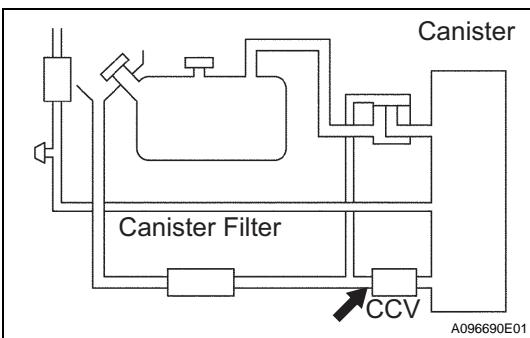

- Disconnect the air inlet line from the CCV.
- Remove and reinstall the fuel tank cap to release the fuel tank pressure.
- Allow the engine to idle.

- Perform step 2 of the EVAP system check.
- Wait for 30 seconds and check VAPOR PRESS (EVAP pressure).

## Result

VAPOR PRESS	Conclusion	Proceed to
Higher than 752 mmHg-a (-10 mmHg-g)	Blockage in canister filter	A
Lower than 752 mmHg-a (-10 mmHg-g)	Blockage in CCV (vent valve) or canister	B

- Reconnect the air inlet line to the CCV.

B

Go to step 13

P

LEVII SYSTEM CHECK  
Step 2. Check for CCV

EVAP VSV.....OPEN  
CCV.....OPEN  
VAPOR PRESS  
.....762 mmHg-a  
Time 030 seconds


Press [RIGHT]

A096683

A

## REPLACE CANISTER FILTER

## 13 CHECK CANISTER BLOCKAGE

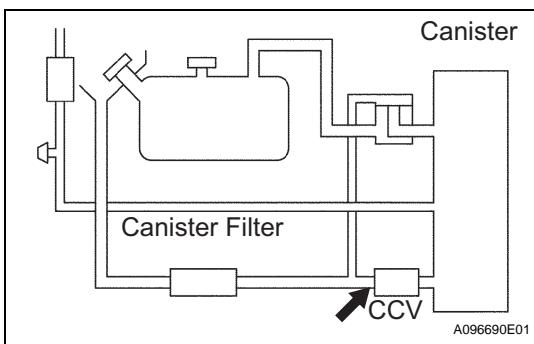

- Turn the ignition switch OFF.
- Remove the CCV from the canister.
- Remove and reinstall the fuel tank cap to release the fuel tank pressure.
- Allow the engine to idle.

ES

- Perform step 2 of the EVAP system check.
- Wait for 30 seconds and check VAPOR PRESS (EVAP pressure).

## Result

VAPOR PRESS	Conclusion	Proceed to
Higher than 752 mmHg-a (-10 mmHg-g)	CCV (vent valve) stuck closed	A
Lower than 752 mmHg-a (-10 mmHg-g)	Blockage in canister	B

LEVII SYSTEM CHECK  
Step 2. Check for CCV

EVAP VSV.....OPEN  
CCV.....OPEN  
VAPOR PRESS  
.....762 mmHg-a  
Time 030 seconds  
Press [RIGHT]

P

A096683


B

## CHECK AND REPLACE CHARCOAL CANISTER ASSEMBLY

A

## REPLACE CCV (VENT VALVE)

## 14 CHECK EVAP VSV (FOR EVAP VSV STUCK OPEN)

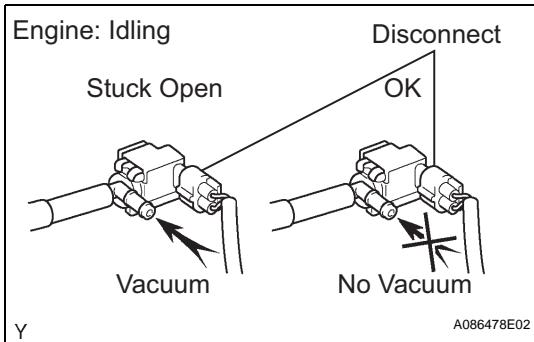

- Turn the ignition switch OFF.
- Disconnect the purge hose of the canister from the EVAP VSV.
- Disconnect the EVAP VSV connector.
- Allow the engine to idle.
- Touch the EVAP VSV port to check the vacuum.

## Result

EVAP VSV	Conclusion	Proceed to
Vacuum is applied.	EVAP VSV is malfunctioning.	A
No vacuum is applied.	Electrical circuit of EVAP VSV is malfunctioning.	B

B

Go to step 29

A

REPLACE EVAP VSV

## 15 CHECK FUEL TANK CAP ASSEMBLY

ES

- (a) Remove the fuel tank cap and reinstall it until a few click sound is heard.
- (b) Clear the DTCs.
- (c) Check pending DTCs after the EVAP system check if no pending DTC is set, the DTC(s) was set due to the fuel cap loosening.  
If necessary, replace the fuel cap.

NG

Go to step 16

OK


REPAIR IS COMPLETE

## 16 CHECK EVAP VSV (FOR EVAP VSV STUCK CLOSED)

If EVAP VSV is functioning normally:

VSV is ON

VSV is OFF

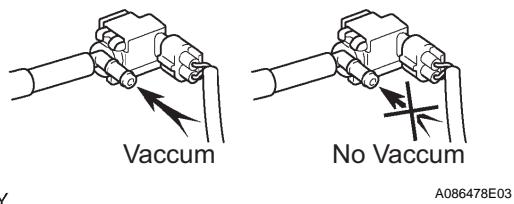

- (a) Disconnect the purge hose of the canister from the EVAP VSV.
- (b) Allow the engine to idle.
- (c) Switch the EVAP VSV using the intelligent tester. Select the intelligent tester menus: DIAGNOSIS, ENHANCED OBD II, ACTIVE TEST and EVAP VSV.
- (d) Touch the EVAP VSV port to check the vacuum.

## Result

EVAP VSV	Conclusion	Proceed to
Vacuum is applied when EVAP VSV is ON. No vacuum is applied when EVAP VSV is OFF.	EVAP VSV is functioning normally.	OK
No vacuum is applied when EVAP VSV is ON.	Electrical circuit of EVAP VSV is malfunctioning.	NG

## HINT:


The EVAP VSV can be tested with the EVAP Test Equipment (go to step 39).

NG


Go to step 31

OK

## 17 | CHECK CCV (FOR CCV STUCK OPEN)

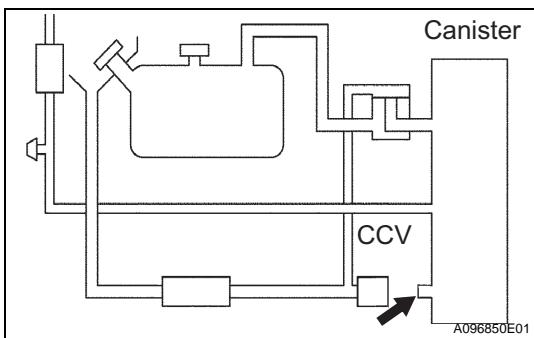

- Turn the ignition switch OFF.
- Remove the CCV (vent valve) and plug the canister.
- Allow the engine to idle.

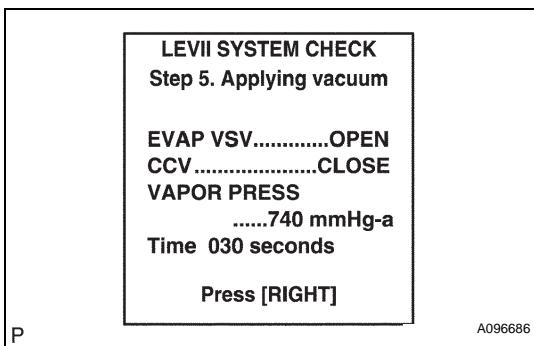

- Apply vacuum to the EVAP system with the EVAP system check. Perform step 5 "Applying Vacuum".
- Wait for 30 seconds and check the VAPOR PRESS (EVAP pressure).

**Result**

VAPOR PRESS	Conclusion	Proceed to
Lower than 747 mmHg-a (-15 mmHg-g)	CCV (vent valve) stuck open	A
Higher than 747 mmHg-a (-15 mmHg-g)	Blockage in canister Blockage in purge line (Fuel tank - Canister) Blockage in purge line (Fuel tank - EVAP VSV)	B

B

Go to step 20

A

GO TO STEP 24

## 18 | CHECK FUEL TANK CAP ASSEMBLY

- Remove the fuel tank cap and reinstall it until a few click sound is heard.
- Clear the DTCs.
- Check pending DTCs after the EVAP system check. If no pending DTC is set, the DTC(s) was set due to the fuel cap loosening.  
If necessary, replace the fuel cap.


NG

Go to step 19

OK

REPAIR IS COMPLETE

## 19 CHECK FILLER NECK DAMAGE

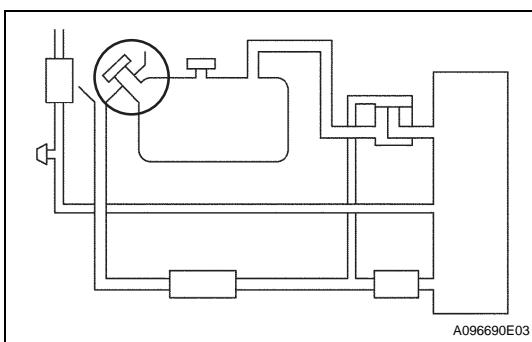

- Remove the fuel tank cap.
- Visually inspect the filler neck for damage.
- Reinstall the fuel tank cap.

HINT:


A leak point may be found with the EVAP Test Equipment (go to step 36).

NG

REPLACE FUEL TANK INLET PIPE

OK

## 20 CHECK PURGE LINE (CANISTER - FUEL TANK)

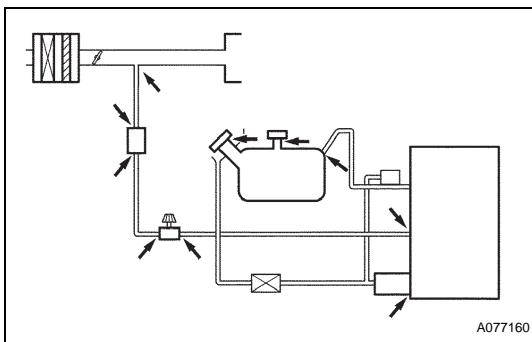

- Check that the pipes and hoses are connected correctly.
- Check that the pipes and hoses are not loose or disconnected.
- Check the pipes and hoses have no damage or blockage.

NG

REPLACE PURGE HOSE

OK

## 21 CHECK PURGE LINE (CANISTER - EVAP VSV)

- Check that the pipes and hoses are connected correctly.
- Check that the pipes and hoses are not loose or disconnected.
- Check the pipes and hoses have no damage or blockage.

B

REPLACE PURGE HOSE

OK

## 22 INSPECT CANISTER


NG

REPLACE CANISTER

OK

**23 INSPECT FUEL TANK ASSEMBLY**

- (a) Check that the fuel tank has no damage.
- (b) Check the fuel inlet pipe has no damage.
- (c) Check leakage from the fuel pump unit

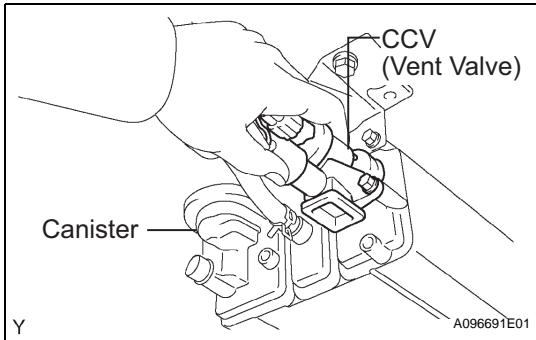**NG****REPAIR OR REPLACE DEFECTIVE OR  
DAMAGED PARTS****OK****GO TO STEP 40****ES****24 CHECK CCV**

- (a) Stop the engine and turn the ignition switch ON.
- (b) Switch the CCV (vent valve) using the intelligent tester. Select the intelligent tester menus: DIAGNOSIS, ENHANCED OBD II, ACTIVE TEST and CAN CTRL VSV.
- (c) Touch the CCV and check the operation during switching the CCV.



**Result**

CCV (Vent Valve)	Conclusion	Proceed to
CCV is operated	Electrical circuit of CCV is functioning normally.	A
CCV is not operated	Electrical circuit of CCV is malfunctioning.	B

**B****Go to step 26****A**

## 25 CHECK CCV

If CCV (vent valve) is functioning normally:

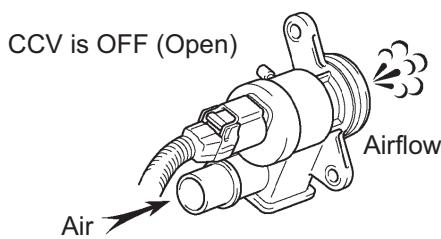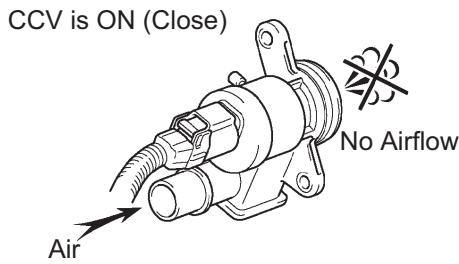

Y

A085742E01

- Turn the ignition switch OFF.
- Remove the CCV (vent valve).
- Connect the CCV connector.
- Turn the ignition switch ON.
- Switch the CCV using the intelligent tester. Select the intelligent tester menus: DIAGNOSIS, ENHANCED OBD II, ACTIVE TEST and CAN CTRL VSV.
- Apply air to the CCV port using an air gun and check the airflow.

## Result


CCV (Vent Valve)	Conclusion	Proceed to
Air flows when CCV is OFF (open). Air does not flows when CCV is ON (close).	CCV is functioning normally. Electrical circuit of CCV is malfunctioning.	A
Air flows when CCV is ON (close). Air does not flows when CCV is OFF (open).	CCV is malfunctioning.	B

B

REPLACE CCV

A

## 26 CHECK WIRE HARNESS (CCV - POWER SOURCE)

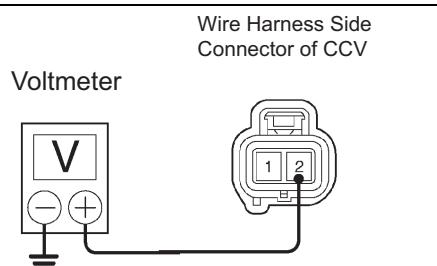

A096694E01

- Turn the ignition switch OFF.
- Disconnect the CCV connector.
- Turn the ignition switch ON.
- Measure the voltage between terminal 2 of the wire harness side connector and body ground.

## Result

Voltage	Conclusion	Proceed to
Battery voltage	Wire harness (CCV - Power source) is OK.	OK
0 to 3 V	Wire harness (CCV - Power source) is short circuit.	NG

B


REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

## 27 CHECK WIRE HARNESS AND CONNECTOR (CCV - ECM)

Wire Harness Side  
Connector of CCV

Ohmmeter

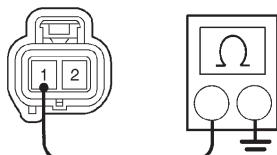

A096695E01

(a) Switch the CCV using the intelligent tester. Select the intelligent tester menus: DIAGNOSIS, ENHANCED OBD II, ACTIVE TEST and CAN CTRL VSV.

(b) Measure the resistance between terminal 1 of the wire harness side connector and body ground.

### Result

Resistance	Conclusion	Proceed to
More than 10 $k\Omega$ when CCV is OFF. Less than 10 $\Omega$ when CCV is ON.	ECM and wire harness (CCV - ECM) are OK. CCV is malfunctioning.	OK
No change	Either of wire harness (CCV - ECM) or ECM is malfunctioning.	NG

NG

Go to step 28

OK

## REPLACE CCV

## 28 CHECK HARNESS AND CONNECTOR (CCV - ECM)

(a) Check the wire harness between the ECM and CCV.

(b) Turn the ignition switch OFF.

(c) Disconnect the E8 ECM connector.



(d) Measure the resistance between the CCV and ECM wire harness side connectors.

### Standard resistance

Tester Connection	Specified Condition
1 (CCV) - E8-27 (ECM)	Less than 10 $\Omega$
1 (CCV) - Body ground	More than 10 $k\Omega$

NG

REPAIR OR REPLACE HARNESS OR  
CONNECTOR

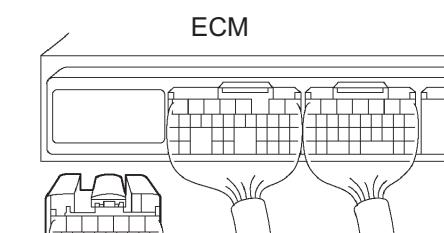

A81699  
A52933


A086476E02

OK

## REPLACE ECM

ES

## 29 CHECK EVAP VSV

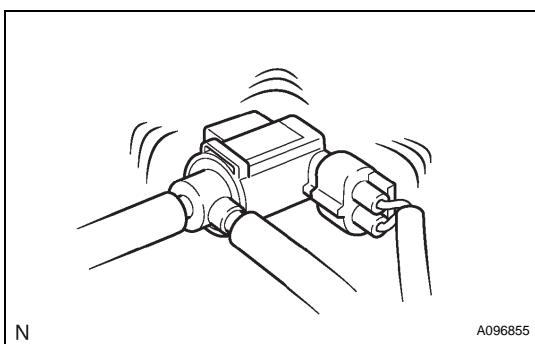

(a) Turn the ignition switch ON.  
 (b) Switch the EVAP VSV using the intelligent tester. Select the intelligent tester menus: DIAGNOSIS, ENHANCED OBD II, ACTIVE TEST and EVAP VSV (Alone).  
 (c) Listen to click sounds to check the EVAP VSV operation.

**Result**

EVAP VSV	Conclusion	Proceed to
Operated	Electrical circuit of EVAP VSV is functioning normally.	OK
Not operated	Electrical circuit of EVAP VSV is malfunctioning.	NG


NG

Go to step 32

OK

## 30 CHECK EVAP VSV

If EVAP VSV is functioning normally:

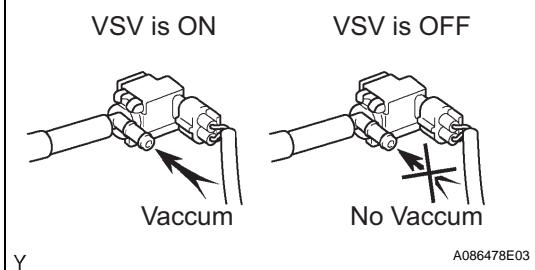

(a) Disconnect the purge hose of the canister from the EVAP VSV.  
 (b) Start the engine.  
 (c) Switch the EVAP VSV using the intelligent tester. Select the intelligent tester menus: DIAGNOSIS, ENHANCED OBD II, ACTIVE TEST and EVAP VSV.  
 (d) Touch the EVAP VSV port to check the vacuum.

**Result**

EVAP VSV	Conclusion	Proceed to
Vacuum is applied when EVAP VSV is ON. No vacuum is applied when EVAP VSV is OFF.	EVAP VSV is functioning normally.	OK
No vacuum is applied when EVAP VSV is ON.	Electrical circuit of EVAP VSV is malfunctioning.	NG

HINT:


The EVAP VSV can be tested with the EVAP Test Equipment (go to step 39).

NG

Go to step 32

OK

## 31 | CHECK PURGE LINE (EVAP VSV - THROTTLE BODY)

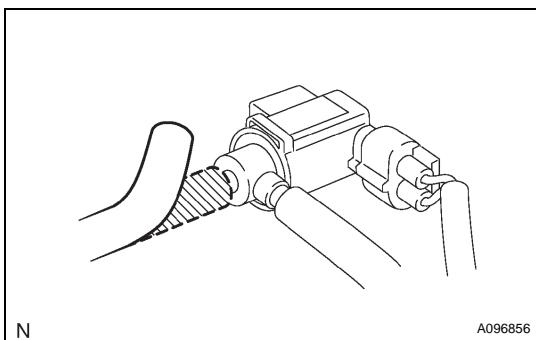

- (a) Check that the vacuum hoses are connected correctly.
- (b) Check that the vacuum hoses are not loose or disconnected.
- (c) Check the vacuum hoses and tubes for cracks, holes, damage, or blockage.


NG

REPLACE PURGE HOSE

OK

## REPLACE EVAP VSV

## 32 | INSPECT EVAP VSV

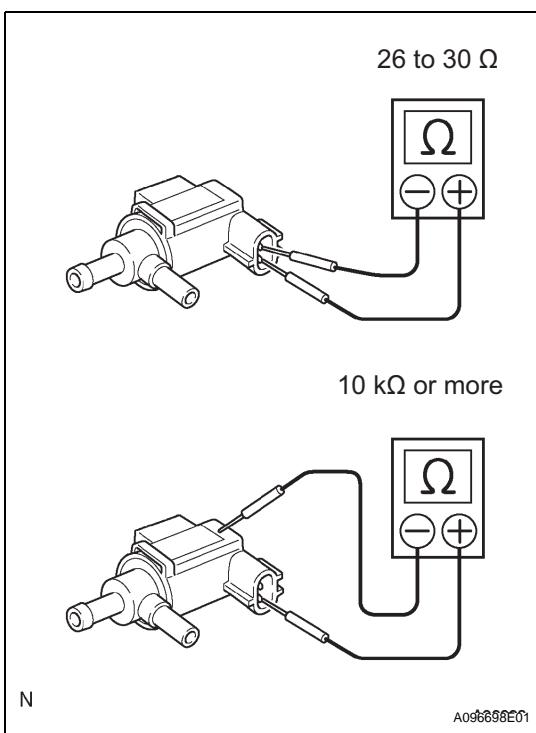

- (a) Turn the ignition switch OFF.
- (b) Disconnect the EVAP VSV connector.
- (c) Measure the resistance of the EVAP VSV.

**Standard resistance**

Tester Connection	Specified Condition
Between terminals	26 to 30 Ω at 20°C (68°F)
Each terminal - Body ground	10 kΩ or more

NG

REPLACE EVAP VSV


OK

ES

## 33 INSPECT EVAP VSV

If EVAP VSV is functioning normally:

EVAP VSV is OFF

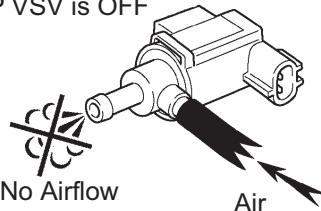


N

A096920E01

(a) Remove the EVAP VSV.

(b) Apply air to the EVAP VSV using an air gun, check the airflow.

If EVAP VSV is functioning normally:

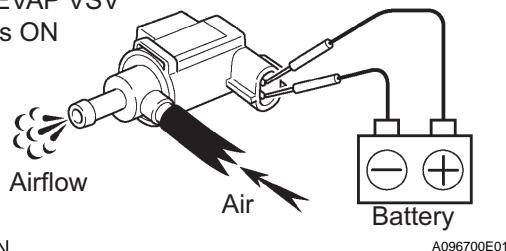EVAP VSV  
is ON

N

A096700E01

(c) Apply battery positive voltage across the terminals.

(d) Apply air to the EVAP VSV using an air gun, check the airflow.

## Result

EVAP VSV	Conclusion	Proceed to
Air does not flow when EVAP VSV is OFF. Air flows when EVAP VSV is ON.	EVAP VSV is functioning normally.	OK
Air flows when EVAP VSV is OFF. Air does not flow when EVAP VSV is ON.	Electrical circuit of EVAP VSV is malfunctioning.	NG

NG

REPLACE EVAP VSV

OK

## 34

## CHECK HARNESS AND CONNECTOR (EVAP VSV - POWER SOURCE)

Wire Harness Side Connector of EVAP VSV



A096692E01

(a) Turn the ignition switch ON.

(b) Measure the voltage between the terminal 1 of the wire harness side and body ground.

## Result


Voltage	Conclusion	Proceed to
Battery voltage	Wire harness (EVAP VSV - Power source) is OK.	OK
0 to 3 V	Wire harness (EVAP VSV - Power source) is short circuit.	NG

NG

REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

### 35 CHECK HARNESS AND CONNECTOR (EVAP VSV - ECM)

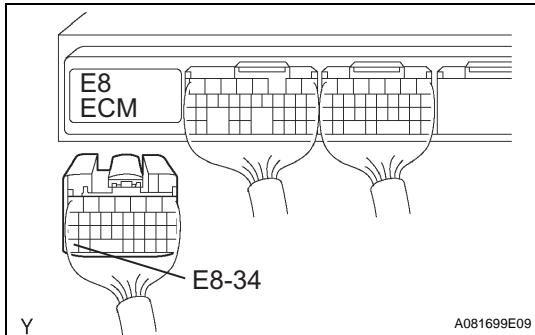

- Turn the ignition switch OFF.
- Disconnect the E8 ECM connector.
- Turn the ignition switch ON.
- Measure the voltage between the terminal 34 of the wire harness side and body ground.

#### Result

Voltage	Conclusion	Proceed to
Battery voltage	Wire harness (EVAP VSV - ECM) is OK.	OK
0 to 3 V	Wire harness (EVAP VSV - ECM) is short circuit.	NG

NG

**REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK

### REPLACE ECM

### 36 CHECK FUEL TANK CAP ASSEMBLY

- Connect the fuel tank cap to the gas cap adaptor.
- Connect the pressure hose from the pump to the gas cap adaptor.
- Plug the gas cap adaptor port.
- Turn the pump ON and pressurize the gas cap adaptor by 24 - 28 mmHg. If the pressure does not reach to 24 mmHg within 45 seconds, stop the pump. The fuel tank cap is malfunctioning.
- Turn the pump OFF and seal the pressure line to maintain the pressure.
- Measure the pressure change for 2 minutes. If the pressure drops to lower than 15 mmHg, the fuel tank cap is malfunctioning.

#### Standard:

**The fuel tank cap keeps the pressure that is 15 mmHg or higher.**

NG

**REPLACE FUEL TANK CAP ASSEMBLY**

OK

### 37 CHECK LEAK

#### NOTICE:

**DO NOT apply the EVAP system to the pressure that is higher than 35 mmHg. The EVAP system will be damaged.**

ES

ES

- (a) Connect the pressure line from the pump to the EVAP service port.
- (b) Turn the ignition switch ON but the engine is not running.
- (c) Turn the CCV (vent valve) is ON (close) using the intelligent tester. Select the intelligent tester menus: DIAGNOSIS, ENHANCED OBD II, ACTIVE TEST and CAN CTRL VSV.
- (d) Turn the pump ON and pressurize the EVAP system by 24 - 28 mmHg.
- (e) Turn the pump OFF and seal the pressure line to maintain the pressure. If the pressure does not reach to 24 mmHg within 45 seconds, stop the pump. A leakage is in the EVAP system. If the system has a small leak, a whistling sound may be heard.
- (f) Measure the pressure change for 2 minutes. If the pressure drops to lower than 15 mmHg, a leakage is in the EVAP system.

**Standard:**

**The EVAP system keeps the pressure that is 15 mmHg or higher.**


NG

Go to step 38


OK

**NO LEAKAGE IN EVAP SYSTEM**

**38 LOOK FOR LEAK POINT**

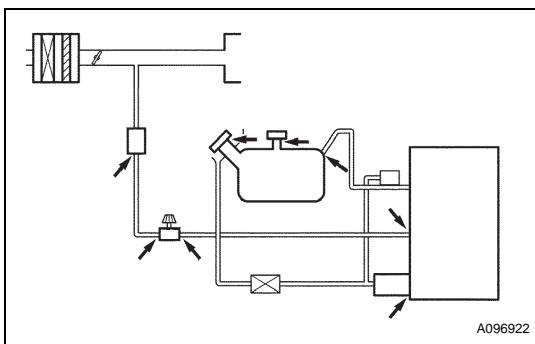

- (a) Apply the soapy water on suspected components.
- (b) Turn the CCV (vent valve) is ON (close) using the intelligent tester. Select the intelligent tester menus: DIAGNOSIS, ENHANCED OBD II, ACTIVE TEST and CAN CTRL VSV.
- (c) Turn the pump ON and pressurize the EVAP system by 24 - 28 mmHg.
- (d) Turn the pump OFF and seal the pressure line to maintain the pressure. If the pressure does not reach to 24 mmHg within 45 seconds, stop the pump.
- (e) Check bubbles to find the leak point:
  - EVAP service port
  - Canister
  - Hose connections/Lines
  - Fuel cap
  - Fuel filler neck
  - Purge line
  - EVAP VSV
  - CCV (vent valve)
  - Fuel pump sending unit
- (f) Repair or replace the leak component.
- (g) Perform the EVAP system check to confirm no leak.

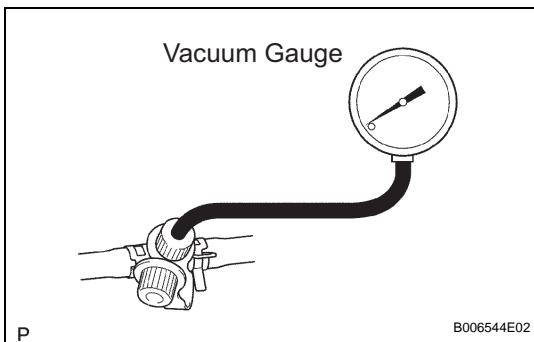**NEXT****GO TO STEP 4****39 CHECK EVAP VSV**

(a) Connect the vacuum gauge to the EVAP service port.

- (1) Start the engine.
- (2) Switch the EVAP VSV using the intelligent tester. Select the intelligent tester menus: DIAGNOSIS, ENHANCED OBD II, ACTIVE TEST and EVAP VSV.
- (3) Check the vacuum when switching the EVAP VSV. If the vacuum gauge indicates negative value when the EVAP VSV is ON, the EVAP VSV is functioning normally.

**OK:**

**The vacuum gauge indicates negative value when the EVAP VSV is ON.**

**NG****Go to step 31****OK****GO TO STEP 17****40 CHECK MONITOR STATUS AND DTC**

- (a) Clear DTCs.
- (b) Perform a drive pattern test (See page [ES-16](#))
- (c) Check that the monitor result is PASS.
- (d) Confirm no pending DTC.

**NEXT****REPAIR IS COMPLETE**