


10. Front Accessory Power Supply Socket

A: WIRING DIAGRAM

<Ref. to WI-135, WIRING DIAGRAM, Front Accessory Power Supply Socket System.>

B: REMOVAL

- 1) Disconnect the ground cable from the battery.
- 2) Remove the front cover. <Ref. to EI-37, REMOVAL, Console Box.>
- 3) Disconnect the harness connectors and remove the front accessory power supply socket.

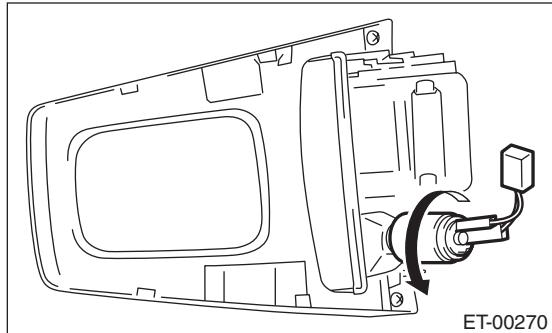

C: INSTALLATION

Install in the reverse order of removal.