

General Description

BRAKE

1. General Description

A: SPECIFICATION

Front disc brake	Size	16-inch type	17-inch type
	Type	Disc (floating type, ventilated)	
	Effective disc diameter mm (in)	244 (9.61)	261 (10.28)
	Disc thickness × Diameter mm (in)	24 × 294 (0.94 × 11.57)	30 × 316 (1.18 × 12.44)
	Effective cylinder diameter mm (in)	42.8 (1.685) × 2	
	Pad dimensions (Length × Width × Thickness) mm (in)	117.8 × 50.5 × 11.0 (4.638 × 1.988 × 0.433)	130.0 × 53.5 × 11.0 (5.118 × 2.106 × 0.433)
	Clearance adjustment	Automatic adjustment	
Rear disc brake	Size	15-inch type	16-inch type
	Type	Disc (floating type, solid)	Disc (floating type, ventilated)
	Effective disc diameter mm (in)	238 (9.37)	243 (9.57)
	Disc thickness × Diameter mm (in)	10 × 274 (0.39 × 10.79)	18 × 278 (0.71 × 10.94)
	Effective cylinder diameter mm (in)	38.1 (1.500)	40.4 (1.591)
	Pad dimensions (Length × Width × Thickness) mm (in)	92.0 × 33.0 × 9.0 (3.622 × 1.299 × 0.354)	95.5 × 34.8 × 11.0 (3.759 × 1.370 × 0.433)
	Clearance adjustment	Automatic adjustment	
Master cylinder	Type	Tandem	
	Effective diameter mm (in)	23.8 (15/16)	
	Reservoir type	Sealed type	
	Brake fluid reservoir capacity cm ³ (cu in)	240 (12.51)	
Brake booster	Type	Vacuum suspended	
	Effective diameter mm (in)	208 + 229 (8.19 + 9.02)	
Brake line		Dual circuit system	
Brake fluid		FMVSS No. 116, DOT3 or DOT4 CAUTION: • Avoid mixing brake fluid of different brands to prevent fluid performance from degrading. • When filling with brake fluid, be careful not to allow any dust to enter the reservoir. • Use new SUBARU genuine brake fluid when replacing or refilling the fluid.	

General Description

BRAKE

NOTE:

Refer to “PARKING BRAKE” for parking brake specifications.<Ref. to PB-2, SPECIFICATION, General Description.>

Item			Standard	Limit
Front brake	Pad thickness mm (in)	All models	11 (0.43)	1.5 (0.059)
	Disc thickness mm (in)	16-inch	24 (0.94)	22 (0.87)
		17-inch	30 (1.18)	28 (1.10)
	Disc runout mm (in)	All models	—	0.05 (0.0020)
Rear brake (disc type)	Pad thickness mm (in)	Solid disc	9.0 (0.354)	1.5 (0.059)
	Pad thickness mm (in)	Ventilated disc	11 (0.43)	1.5 (0.059)
	Disc thickness mm (in)	Solid disc	10 (0.39)	8.5 (0.335)
	Disc thickness mm (in)	Ventilated disc	18 (0.71)	16 (0.63)
	Disc runout mm (in)		—	0.05 (0.0020)
Parking brake	Inside diameter mm (in)		170 (6.69)	171 (6.73)
	Lining thickness mm (in)		3.5 (0.14)	1.5 (0.059)

		Brake pedal force N (kgf, lbf)	Fluid pressure kPa (kgf/cm ² , psi)
Brake booster	Brake fluid pressure with engine stopped	147 (15, 33)	553 (5, 77)
		294 (30, 66)	1,551 (16, 225)
	Brake fluid pressure with engine running and vacuum pressure at 66.7 kPa (500 mmHg, 19.69 inHg)	147 (15, 33)	6,177 (63, 896)
		294 (30, 66)	11,273 (115, 1,635)


Brake pedal	Free play mm (in)	0.5 — 2 (0.020 — 0.079) [When pulling the brake pedal upward with a force of less than 10 N (1 kgf, 2 lbf)]
-------------	-------------------	--

General Description

BRAKE

B: COMPONENT

1. FRONT DISC BRAKE

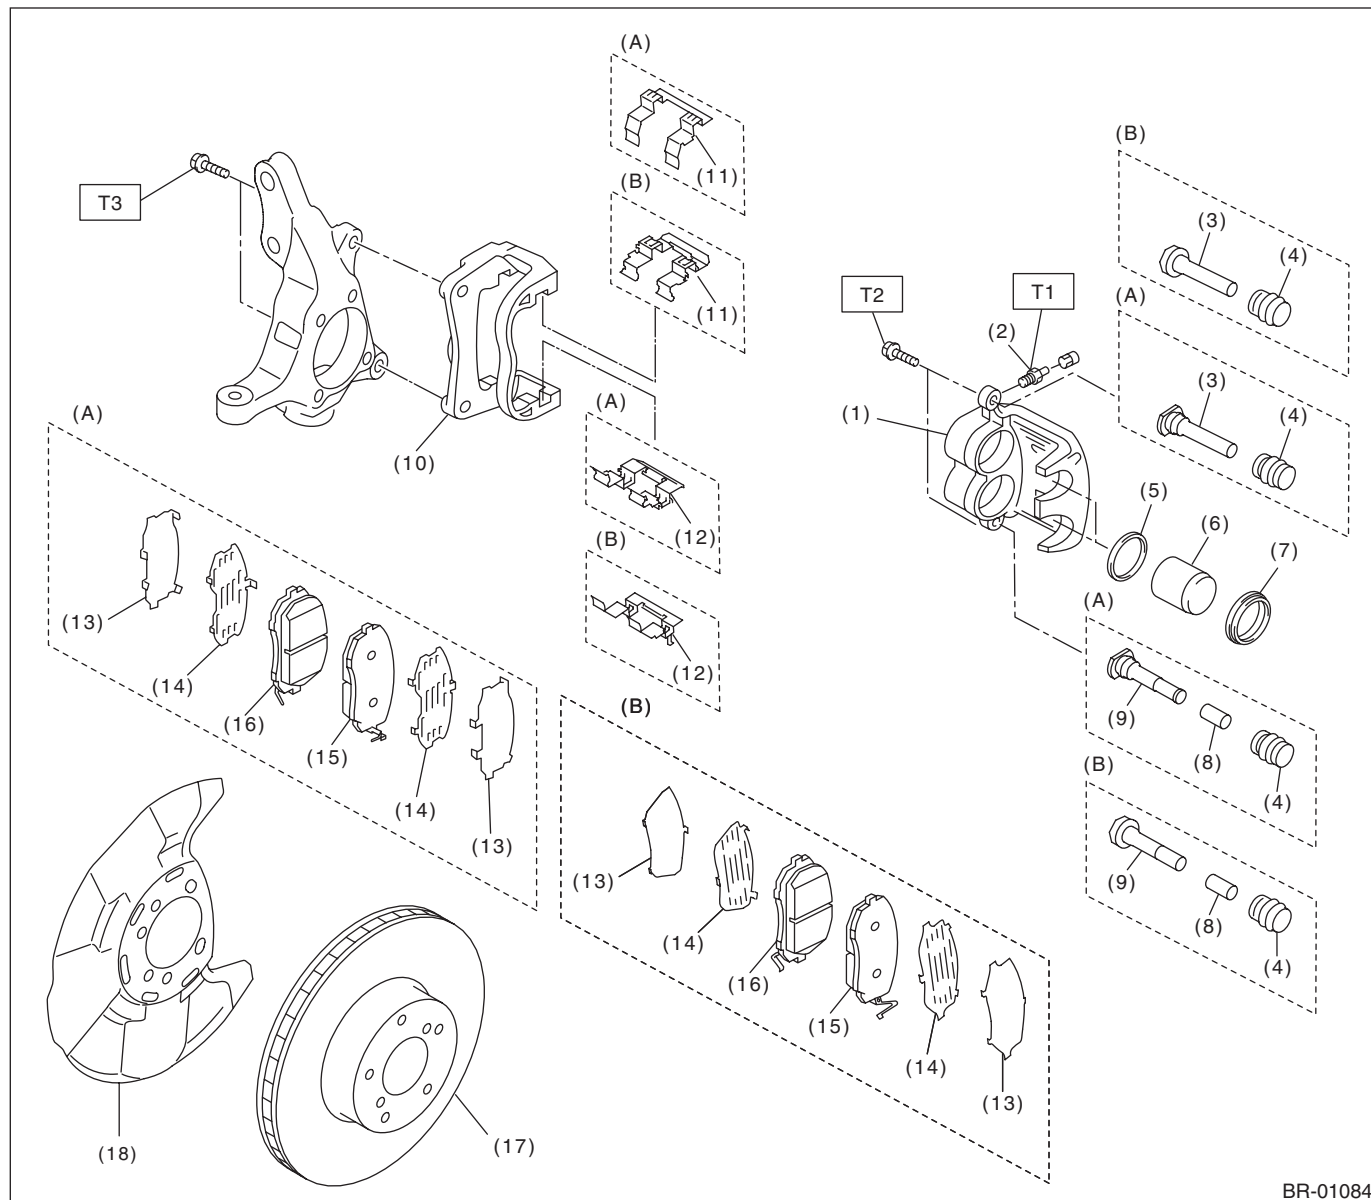

BR-01084

(A) 16-inch type

(B) 17-inch type

(1) Caliper body

(2) Bleeder - screw

(3) Guide pin - front brake (black)

(4) Pin boot

(5) Piston seal

(6) Piston - disc brake

(7) Piston boot

(8) Lock pin - sleeve

(9) Lock pin - front brake (silver)

(10) Support - front disc brake

(11) Pad clip - upper

(12) Pad clip - lower

(13) Shim - disc brake front outer

(14) Shim - disc brake front inner

(15) Pad - disc brake front outer

(16) Pad - disc brake front inner

(17) Disc rotor

(18) Back plate - front brake


Tightening torque: N-m (kgf-m, ft-lb)

T1: 8 (0.82, 5.9)

T2: 27 (2.75, 19.9)

T3: 80 (8.16, 59.0)

2. REAR DISC BRAKE

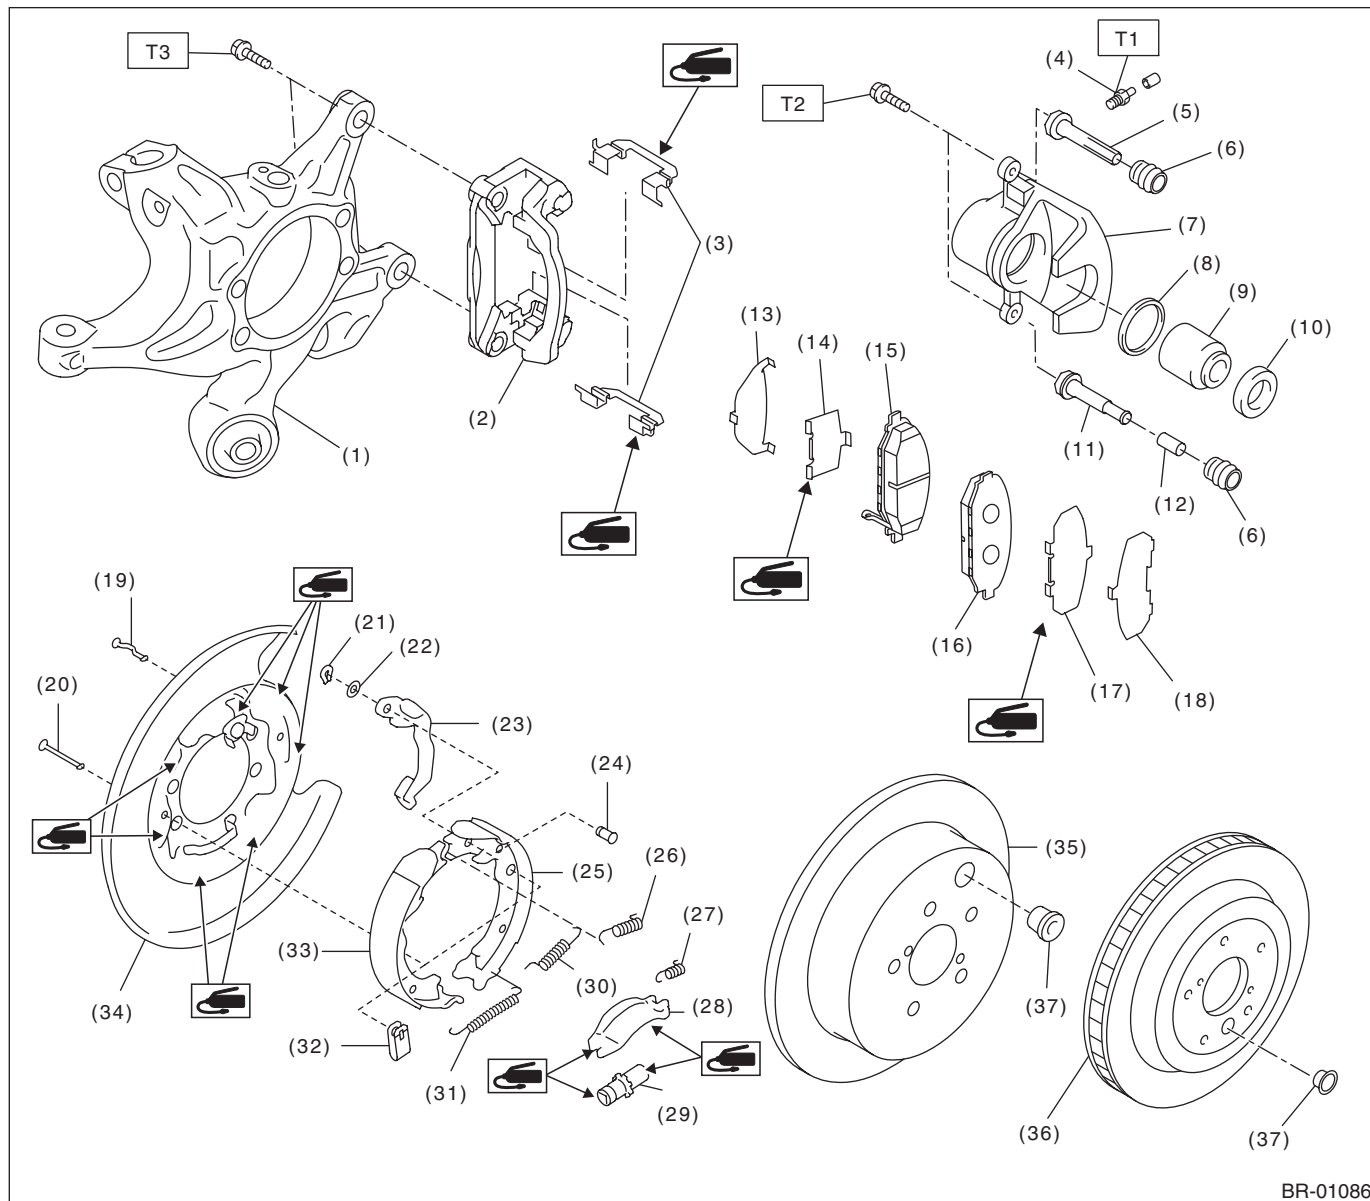

BR-01086


- | | | |
|-------------------------------------|-------------------------------------|-----------------------------------|
| (1) Housing ASSY - rear axle | (15) Pad - disc brake rear inner | (29) Adjuster ASSY - rear brake |
| (2) Support - rear disc brake | (16) Pad - disc brake rear outer | (30) Spring - primary shoe return |
| (3) Pad clip - rear brake | (17) Shim - disc brake rear inner | (31) Spring - adjuster |
| (4) Bleeder - screw | (18) Shim - disc brake rear outer | (32) Cup - shoe hold-down |
| (5) Guide pin - rear brake (black) | (19) Pin - secondary shoe hold-down | (33) Parking brake shoe (primary) |
| (6) Pin boot | (20) Pin - primary shoe hold-down | (34) Back plate - rear brake |
| (7) Caliper body | (21) Retainer - rear brake | (35) Disc rotor (solid type) |
| (8) Piston seal | (22) Spring washer - rear brake | (36) Disc rotor (ventilated type) |
| (9) Piston - disc brake | (23) Parking lever - rear | (37) Adjusting hole cover |
| (10) Piston boot | (24) Pin - parking lever | |
| (11) Lock pin - rear brake (silver) | (25) Parking brake shoe (secondary) | |
| (12) Lock pin - sleeve | (26) Spring - secondary shoe return | |
| (13) Shim - disc brake rear outer | (27) Spring - strut | |
| (14) Shim - disc brake rear inner | (28) Strut - brake | |

Tightening torque: N-m (kgf-m, ft-lb)**T1: 8 (0.82, 5.9)****T2: 27 (2.75, 19.9)****T3: 66 (6.73, 48.7)**

General Description

BRAKE

3. MASTER CYLINDER

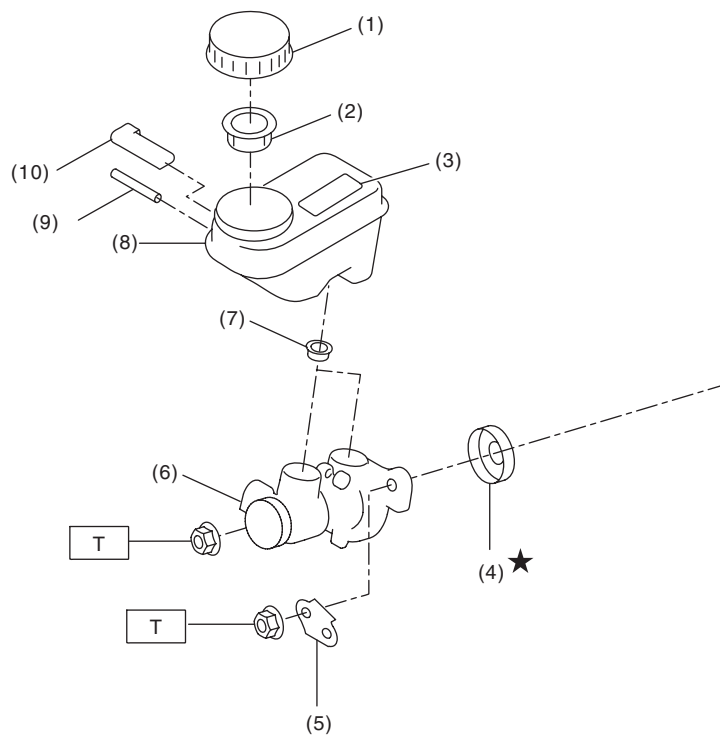

BR-01046


- | | |
|--|------------------------|
| (1) Cap - reservoir tank | (6) Cylinder body ASSY |
| (2) Filter - master cylinder | (7) Seal |
| (3) Caution label (model with caution label) | (8) Reservoir tank |
| (4) Seal sub ASSY | (9) Pin |
| (5) Bracket - master cylinder | (10) Level - indicator |

Tightening torque: N·m (kgf-m, ft-lb)

T: 13 (1.33, 9.6)

4. FRONT BRAKE PIPES AND HOSES

- Models without EyeSight

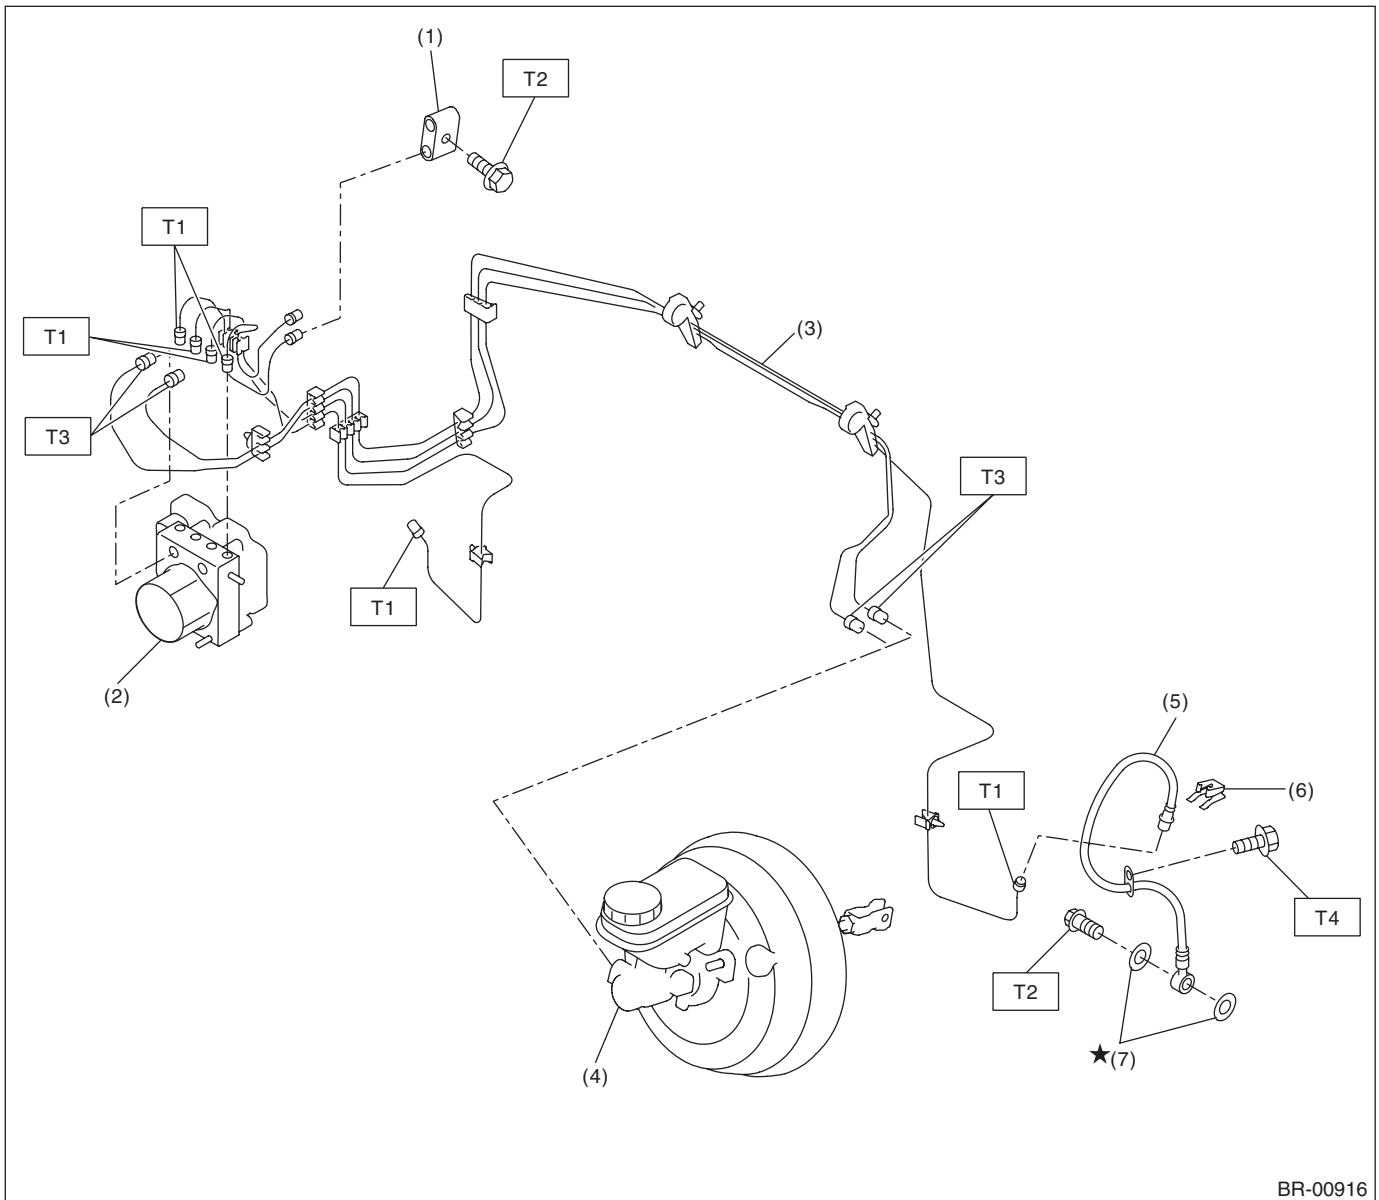

BR-00916

- | | |
|---|----------------------------|
| (1) Connector - two-way | (5) Front brake hose RH/LH |
| (2) VDC control module and hydraulic control unit (VDCCM&H/U) | (6) Clamp |
| (3) Front brake pipe ASSY | (7) Gasket |
| (4) Master cylinder ASSY | |

Tightening torque: N·m (kgf-m, ft-lb)

T1: 15 (1.53, 11.1)

T2: 18 (1.84, 13.3)


T3: 19 (1.94, 14.0)

T4: 33 (3.36, 24.3)

General Description

BRAKE

• Models with EyeSight

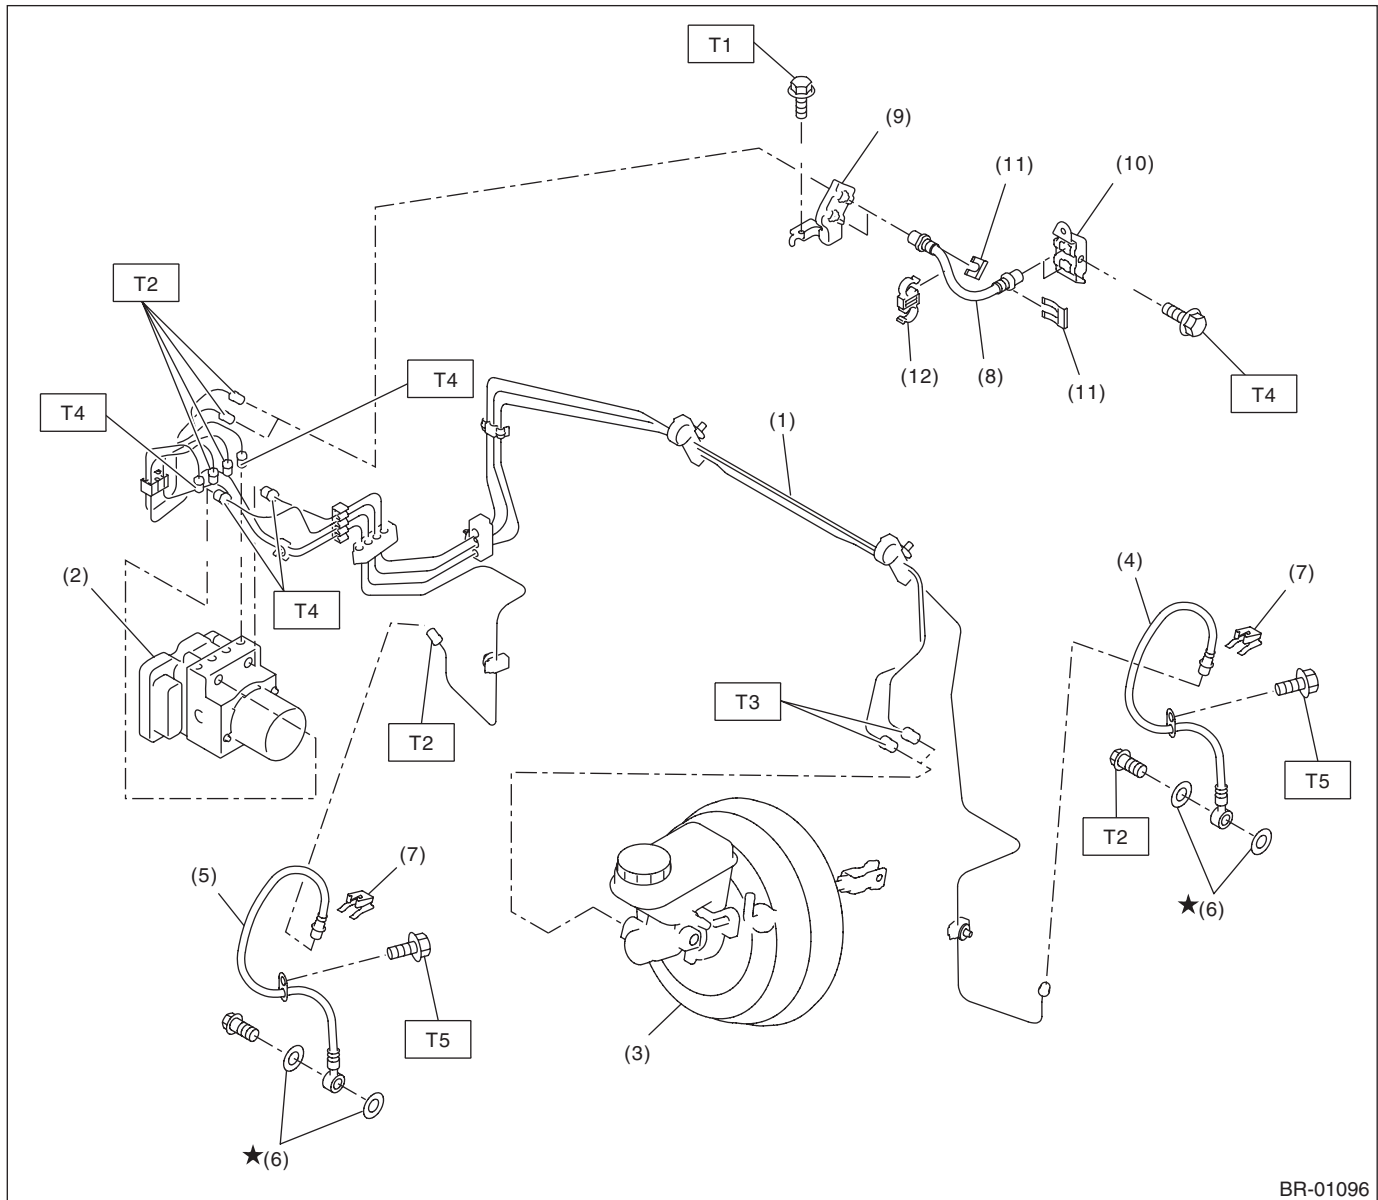

- | | |
|---|---------------------|
| (1) Front brake pipe ASSY | (7) Clamp |
| (2) VDC control module and hydraulic control unit (VDCCM&H/U) | (8) Brake hose ASSY |
| (3) Master cylinder ASSY | (9) Bracket |
| (4) Front brake hose RH | (10) Bracket |
| (5) Front brake hose LH | (11) Clip |
| (6) Gasket | (12) Clamp |

Tightening torque: N·m (kgf·m, ft·lb)

T1: 7.5 (0.76, 5.5)


T2: 15 (1.53, 11.1)

T3: 18 (1.84, 13.3)

T4: 19 (1.94, 14.0)

T5: 33 (3.36, 24.3)

5. CENTER AND REAR BRAKE PIPES AND HOSES

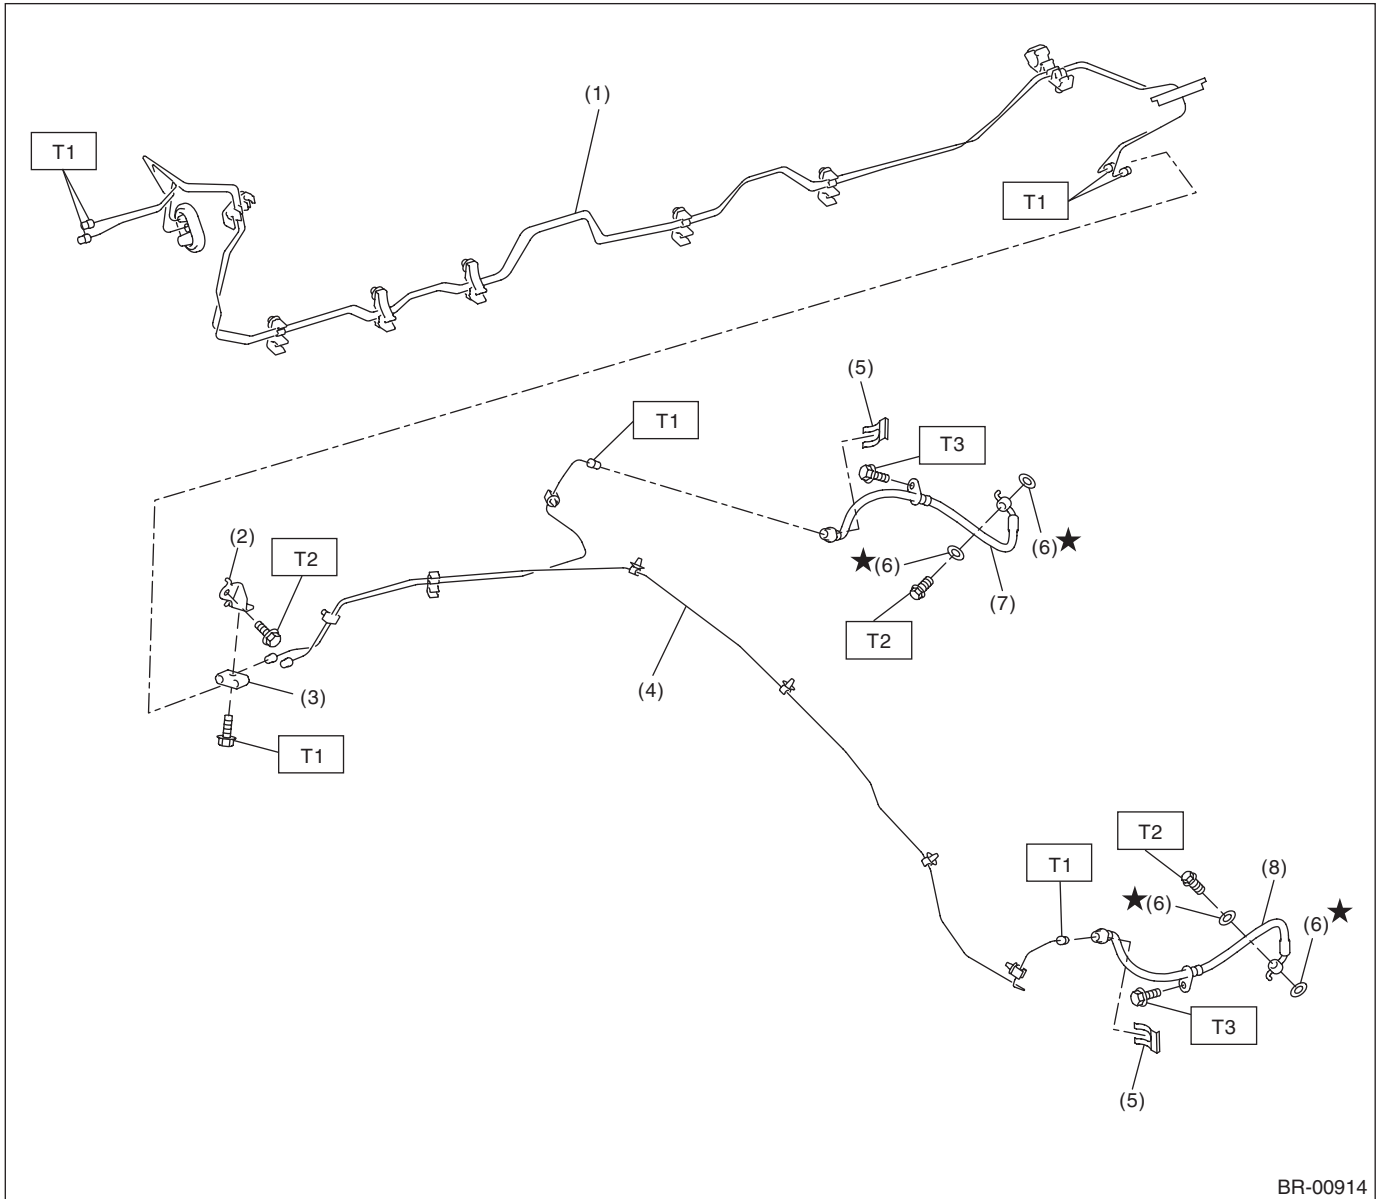

BR-00914

- | | |
|----------------------------|------------------------|
| (1) Center brake pipe ASSY | (5) Clamp |
| (2) Bracket | (6) Gasket |
| (3) Connector | (7) Rear brake hose RH |
| (4) Rear brake pipe ASSY | (8) Rear brake hose LH |

Tightening torque: N·m (kgf-m, ft-lb)

T1: 15 (1.53, 11.1)


T2: 18 (1.84, 13.3)

T3: 33 (3.36, 24.3)

General Description

BRAKE

6. BRAKE BOOSTER

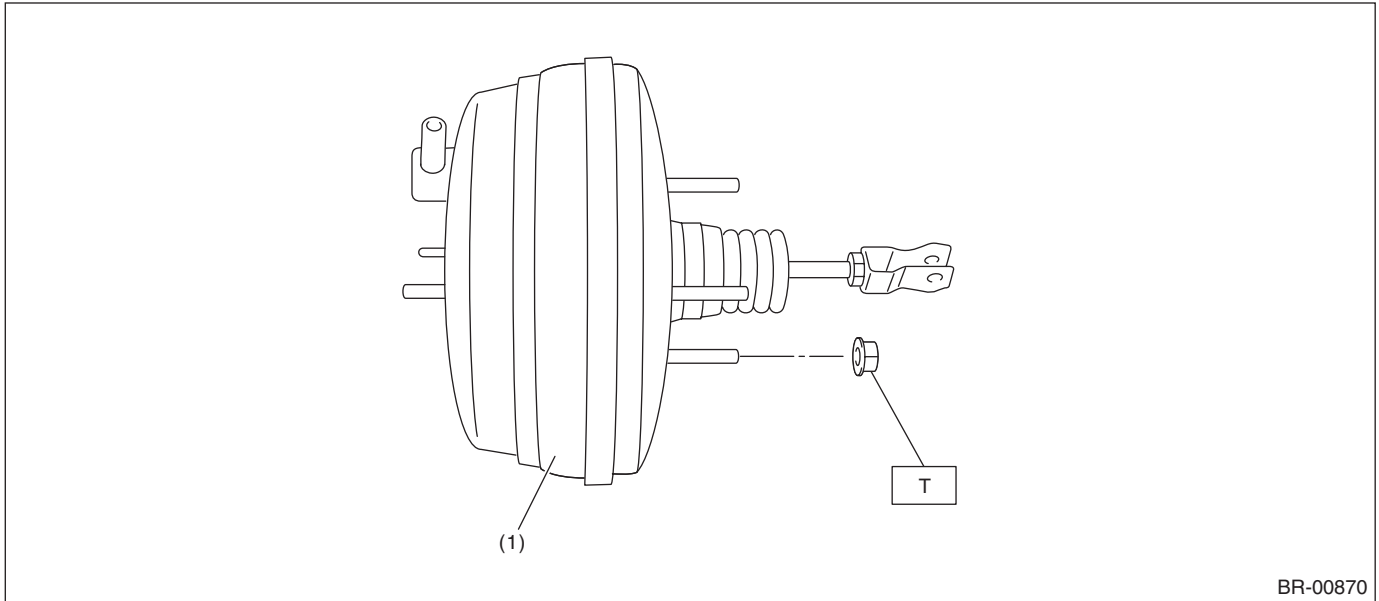


(1) Vacuum booster ASSY

Tightening torque: N·m (kgf-m, ft-lb)

T: 18 (1.84, 13.3)

7. BRAKE PEDAL

- CVT model

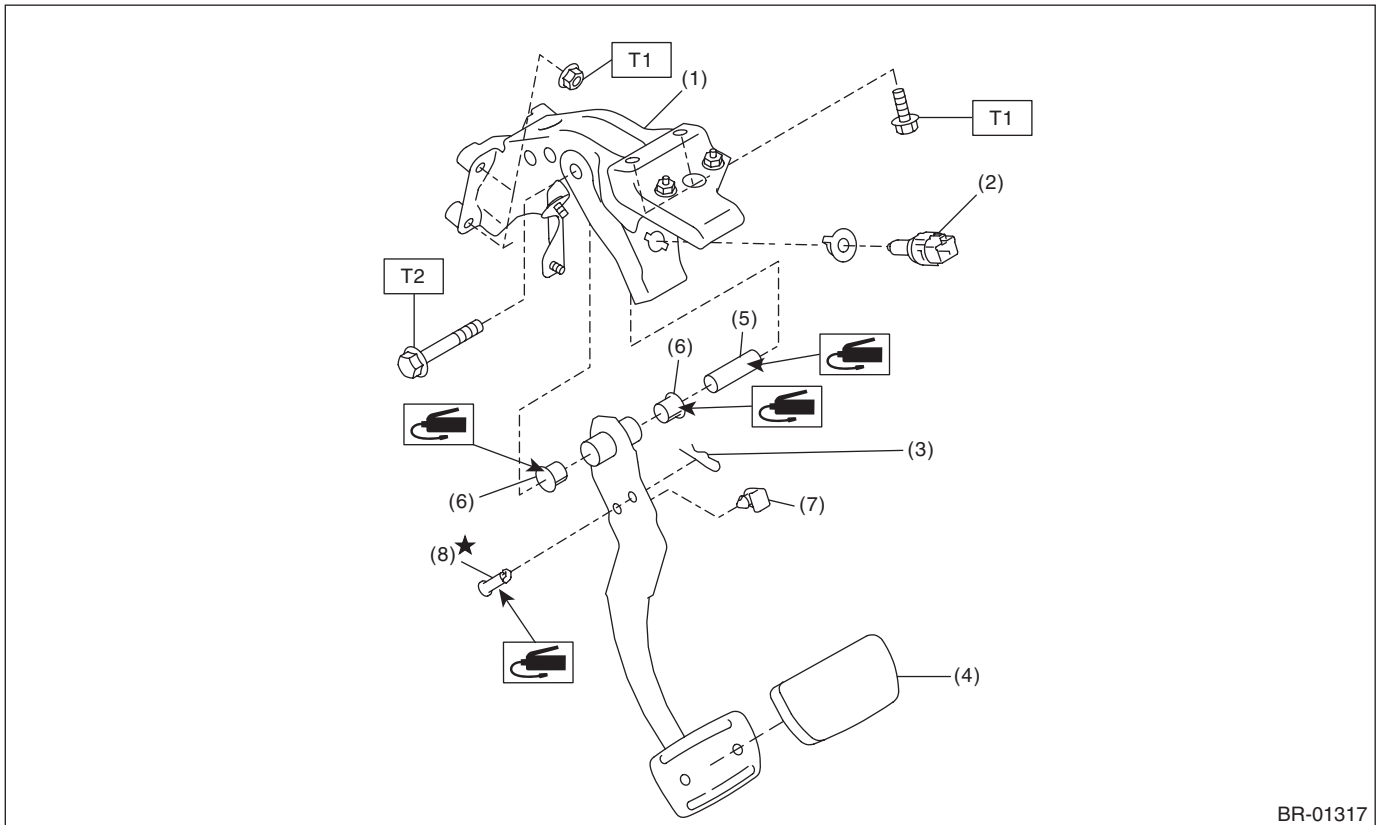

BR-01317

- | | |
|-------------------------------------|---------------------|
| (1) Brake pedal ASSY | (5) Spacer - pedal |
| (2) Switch - stop light | (6) Bushing - pedal |
| (3) Snap pin | (7) Stopper - pedal |
| (4) Pad - brake pedal (normal type) | (8) Clevis pin |

Tightening torque: N·m (kgf-m, ft-lb)


T1: 18 (1.84, 13.3)

T2: 30 (3.06, 22.1)

General Description

BRAKE

• MT model

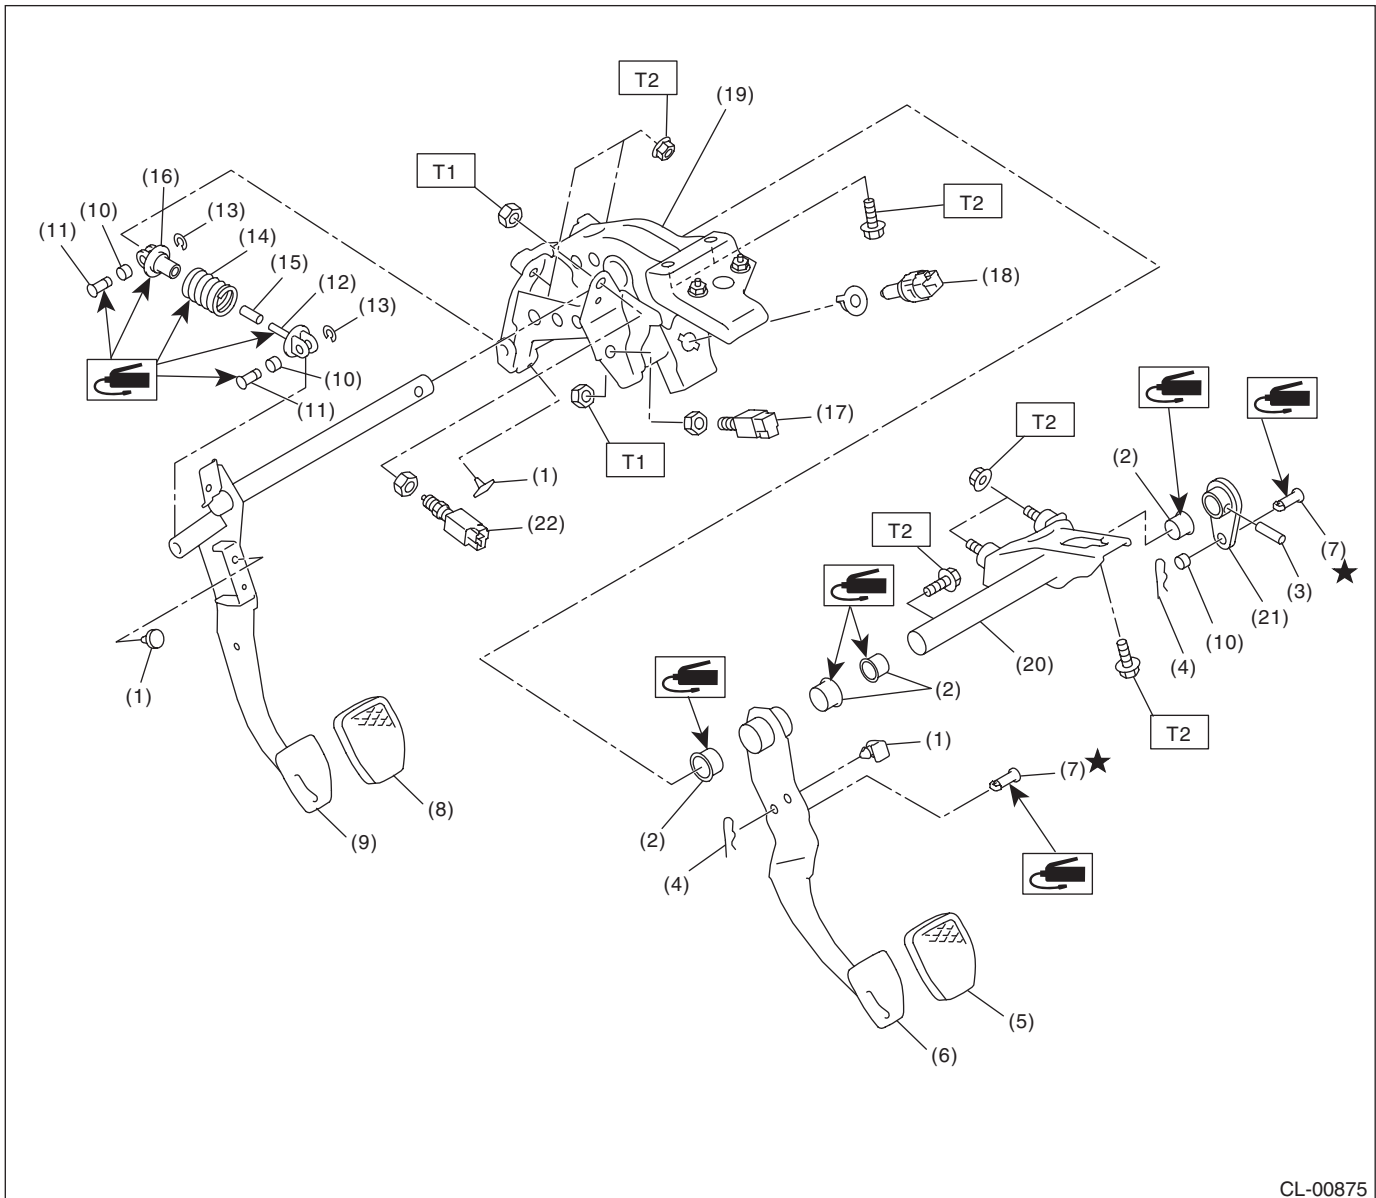

CL-00875


- | | | |
|-----------------------|--------------------------|-------------------------------------|
| (1) Stopper | (10) Bushing C | (19) Pedal bracket |
| (2) Bushing | (11) Clutch clevis pin | (20) Clutch master cylinder bracket |
| (3) Spring pin | (12) Assist rod A | (21) Lever |
| (4) Snap pin | (13) Clip | (22) Clutch start switch |
| (5) Pad - brake pedal | (14) Assist spring | |
| (6) Brake pedal | (15) Assist bushing | |
| (7) Clevis pin | (16) Assist rod B | |
| (8) Clutch pedal pad | (17) Clutch switch | |
| (9) Clutch pedal | (18) Switch - stop light | |

Tightening torque: N·m (kgf-m, ft-lb)

T1: 8 (0.82, 5.9)

T2: 18 (1.84, 13.3)

8. BRAKE VACUUM PUMP

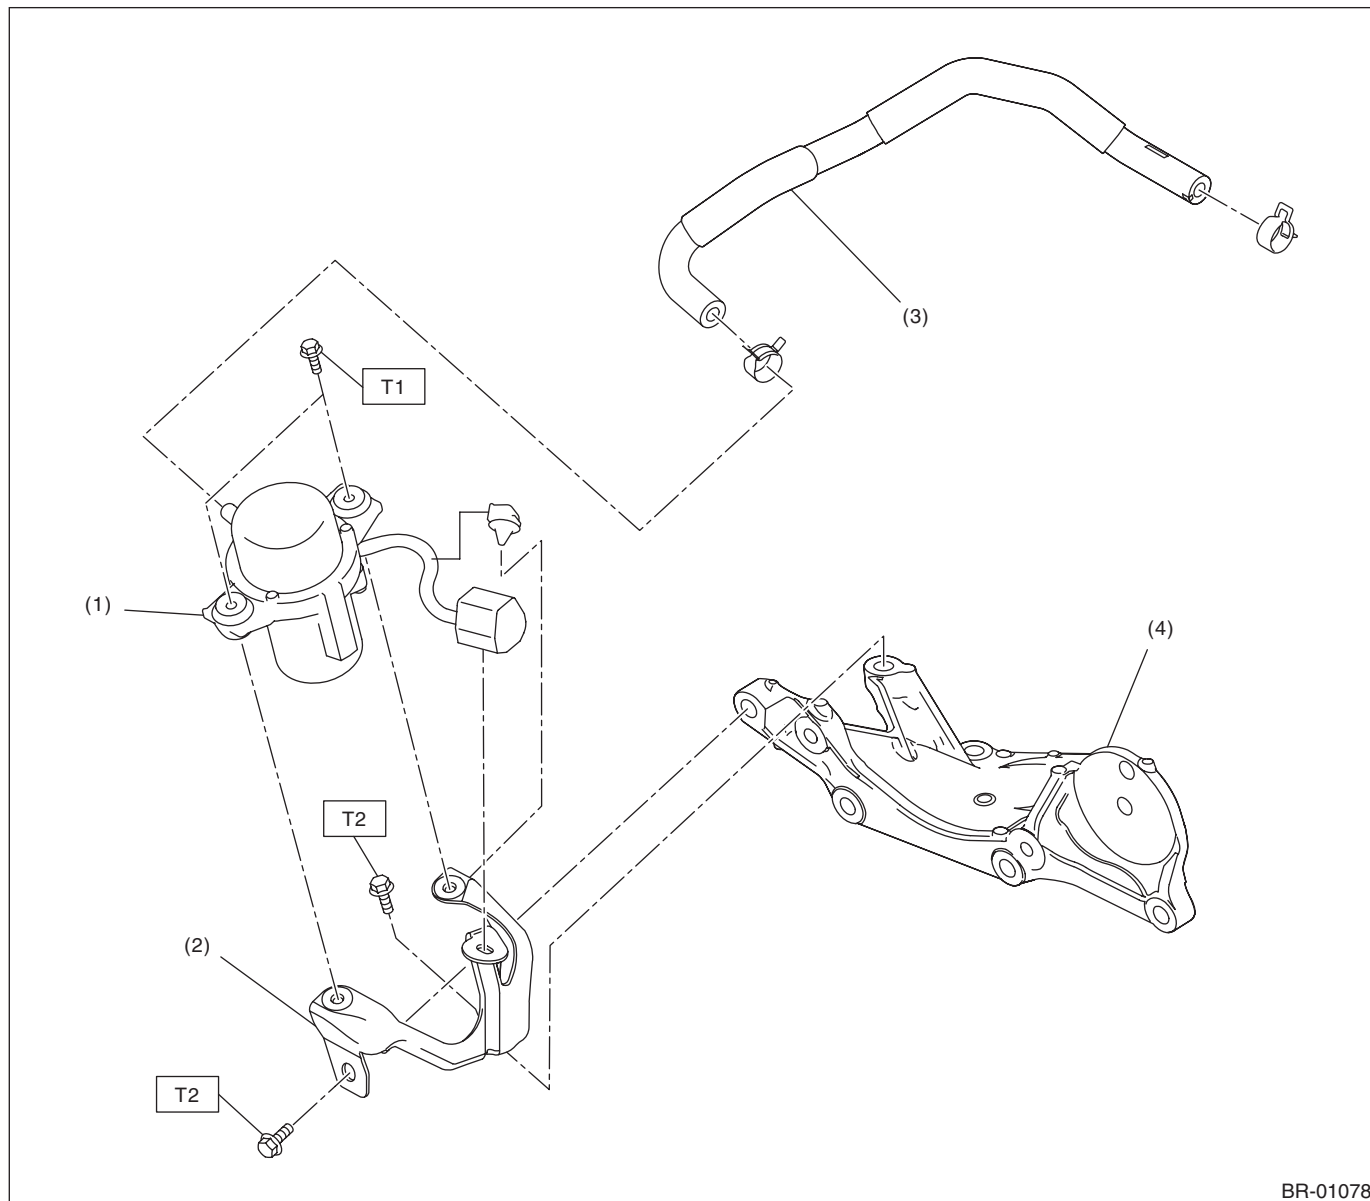

BR-01078

- | | |
|---------------------------------|-------------------------|
| (1) Vacuum pump ASSY | (3) Vacuum hose COMPL |
| (2) Bracket COMPL - vacuum pump | (4) Bracket - generator |

Tightening torque: N·m (kgf-m, ft-lb)

T1: 6.4 (0.65, 4.7)

T2: 19 (1.9, 14.0)

General Description

BRAKE

C: CAUTION

- Wear appropriate work clothing, including a helmet, protective goggles and protective shoes when performing any work.
- Before removal, installation or disassembly, be sure to clarify the failure. Avoid unnecessary removal, installation, disassembly and replacement.
- Use SUBARU genuine grease etc. or equivalent. Do not mix grease etc. of different grades or manufacturers.
- Before securing a part on a vise, place cushioning material such as wood blocks, aluminum plate, or cloth between the part and the vise.
- Be sure to tighten fasteners including bolts and nuts to the specified torque.
- Place shop jacks or rigid racks at the specified points.