


5. Cruise Control Command Switch

A: REMOVAL


WARNING:

Before servicing, be sure to read the notes in the AB section for proper handling of the driver's airbag module. <Ref. to AB-3, CAUTION, General Description.>


- 1) Set the front wheels in straight ahead position.
- 2) Turn ignition switch OFF.
- 3) Disconnect the ground terminal from battery and wait for at least 20 seconds before starting work.
- 4) Using TORX® BIT T30 (Tamper resistant type), loosen two TORX® bolts which secure driver's airbag module.

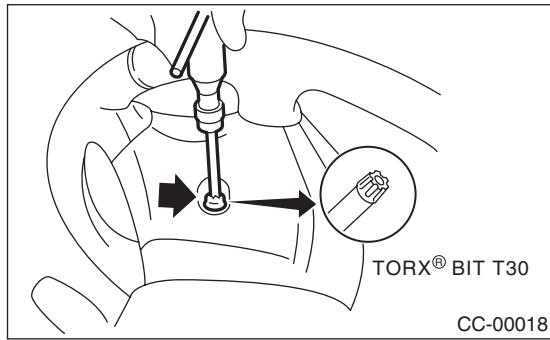

- 5) Disconnect the airbag module connector on back of the airbag module.
- 6) Remove the horn switch from the steering wheel as shown.

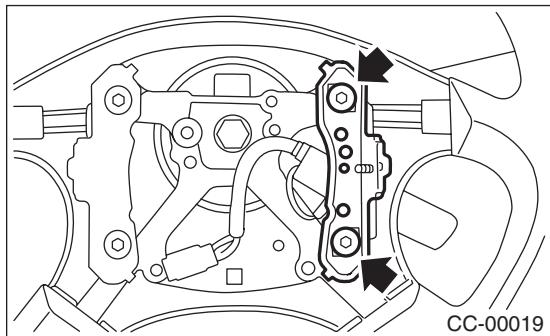

- 7) Disconnect the horn and cruise control command switch connector, then remove the cruise control command switch.

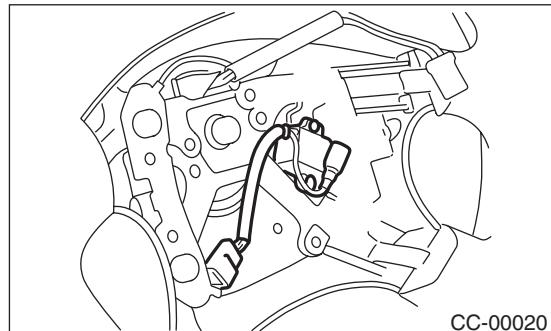


B: INSTALLATION

Install is in the reverse order of removal.

C: INSPECTION

Measure the cruise control command switch resistance.

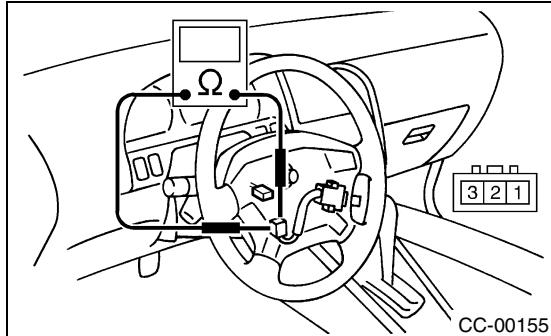

Switch	Position	Terminal No.	Standard
CANCEL	ON	1 (+) and 2 (-)	Less than 1Ω
	ON	1 (+) and 3 (-)	Less than 1Ω
SET/COAST	OFF	1 and 3	More than 1MΩ
	ON	1 and 3	Less than 1Ω
RESUME/ ACCEL	OFF	1 and 2	More than 1MΩ
	ON	1 and 2	Less than 1Ω

If NG, replace the cruise control command switch.