



8. Rear Regulator and Motor Assembly

A: REMOVAL

- 1) Remove the door glass. <Ref. to GW-15, REMOVAL, Rear Door Glass.>
- 2) Remove the front sash.
- 3) Disconnect the motor connector.
- 4) Loosen four bolts and two nuts to remove regulator assembly.

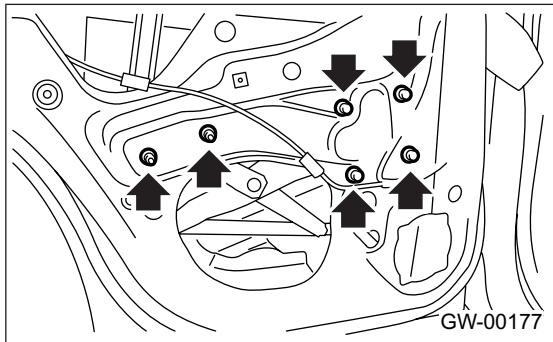

- 5) Loosen screws to remove motor assembly.

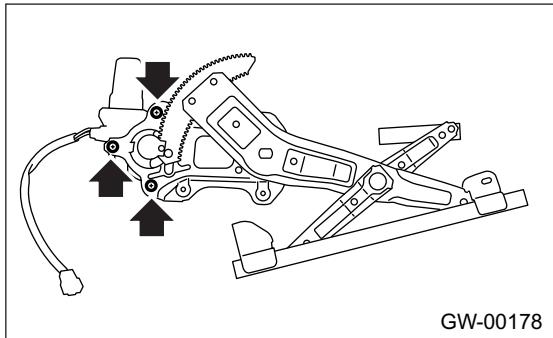

B: INSTALLATION

- 1) Install in the reverse order of removal.
- 2) Adjust the rear door glass. <Ref. to GW-16, ADJUSTMENT, Rear Door Glass.>

C: INSPECTION

- 1) Make sure that the power window motor rotates properly when the battery voltage is applied to the terminals of motor connector.
- 2) Change the polarity of battery connections to the terminals to ensure that the motor rotates in reverse direction.