


6. Master Cylinder

A: REMOVAL

CAUTION:


Be careful not to spill the brake fluid. Brake fluid spilled on the vehicle body will harm the paint surface; wash it off with water and wipe clean quickly if spilled.

- 1) Thoroughly drain the brake fluid from the reservoir tank.
- 2) Remove the instrument panel lower cover.
- 3) Remove the snap pin and clevis pin, and then separate the push rod of the master cylinder from clutch pedal.

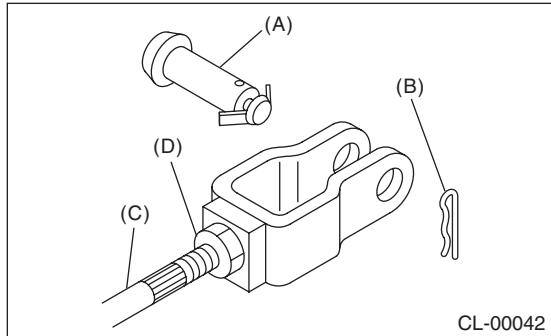

(A) Clevis pin
(B) Snap pin
(C) Push rod
(D) Lock nut

- 4) Remove the air intake chamber. (non-turbo model) <Ref. to IN(H4SO)-7, REMOVAL, Air Intake Chamber.>
- 5) Remove the intercooler. (Turbo model) <Ref. to IN(H4DOTC)-13, REMOVAL, Intercooler.>
- 6) Remove the clutch pipe from the master cylinder.
- 7) Remove the master cylinder and reservoir tank as a unit.

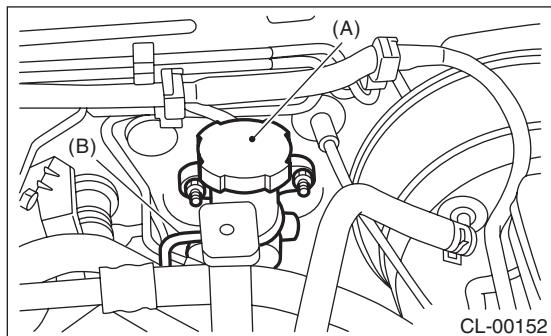


(A) Master cylinder
(B) Clutch pipe

B: INSTALLATION

- 1) Install the master cylinder to the vehicle body, and connect the clutch pipe to the master cylinder.

Tightening torque:


T1: 15 N·m (1.5 kgf-m, 11.1 ft-lb)
T2: 18 N·m (1.8 kgf-m, 13.3 ft-lb)

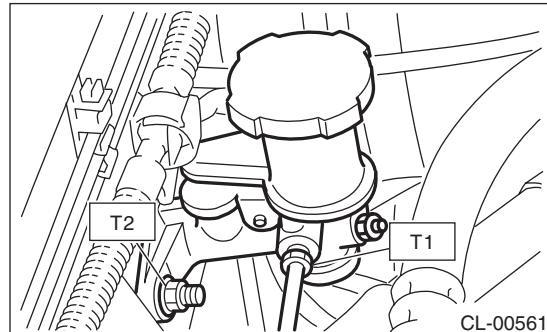

- 2) Connect the push rod of the master cylinder to the clutch pedal, and install the clevis pin and snap pin.

NOTE:

- Use a new clevis pin.
- Apply grease to the clevis pin.

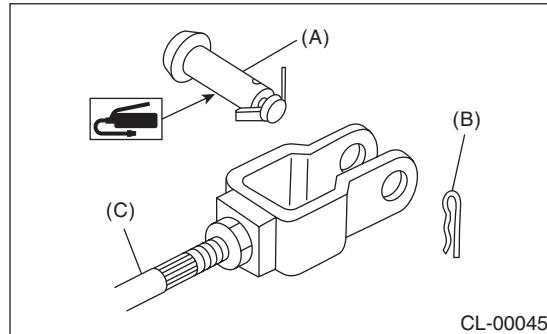


(A) Clevis pin
(B) Snap pin
(C) Push rod

- 3) Install the instrument panel lower cover.
- 4) After bleeding air from the clutch system, ensure that the clutch operates properly. <Ref. to CL-22, Clutch Fluid Air Bleeding.>
- 5) Install the air intake chamber. (non-turbo model) <Ref. to IN(H4SO)-7, INSTALLATION, Air Intake Chamber.>
- 6) Install the intercooler. (Turbo model) <Ref. to IN(H4DOTC)-13, INSTALLATION, Intercooler.>

C: DISASSEMBLY


- 1) Remove the straight pin and reservoir tank.

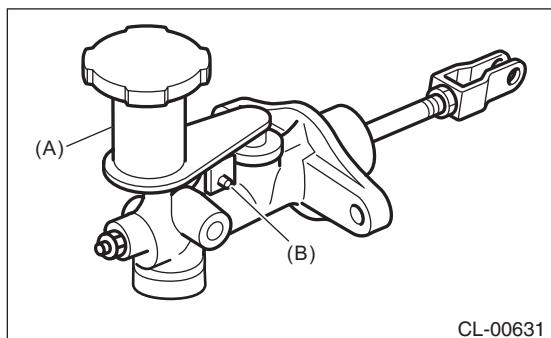

CL-00631

(A) Reservoir tank
(B) Straight pin


- 2) Remove the oil seal.

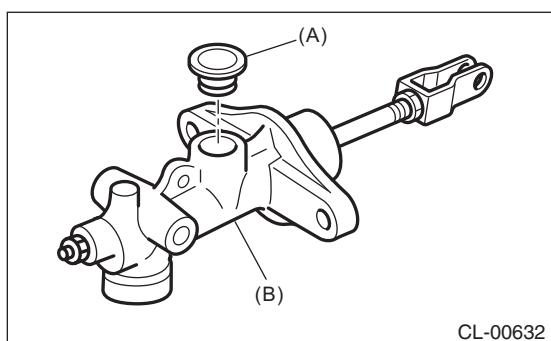

CL-00632

(A) Oil seal
(B) Master cylinder

- 3) Move the seat towards the rear.

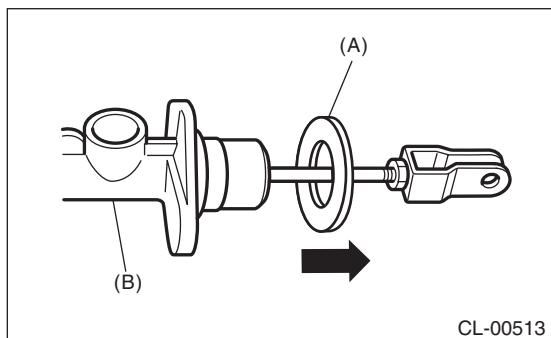

CL-00513

(A) Seat
(B) Master cylinder

- 4) Remove the piston stop ring.

CAUTION:


When removing the piston stop ring, be careful to prevent the rod, washer, piston and return spring from popping out.

D: ASSEMBLY

- 1) Apply a coat of grease to the contact surfaces of the push rod and piston before installation.

Grease:

SILICONE GREASE G-40M (Part No. 004404003) or equivalent

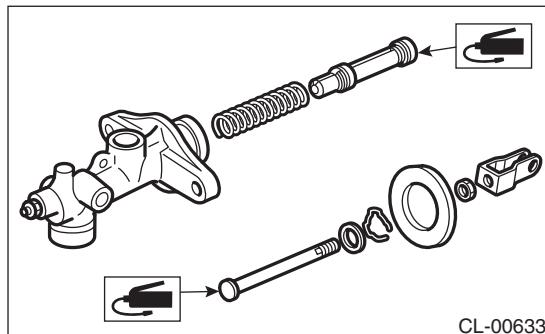

CL-00633


- 2) Assemble in the reverse order of disassembly.

Tightening torque:

10 N·m (1.0 kgf·m, 7.4 ft-lb)

E: INSPECTION

If any damage, deformation, wear, swelling, rust or other faults are found on the cylinder, piston, push rod, reservoir tank, return spring, bleeder screw, seat or hose, replace the faulty part.

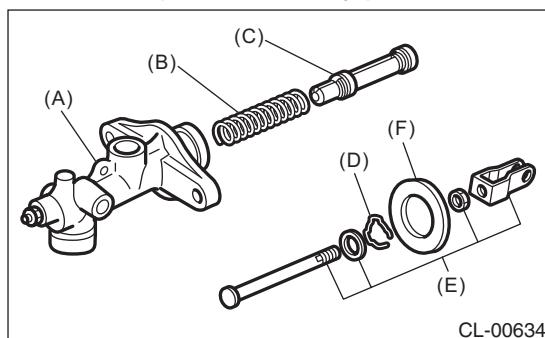

CL-00634

(A) Master cylinder body
(B) Return spring
(C) Piston
(D) Piston stop ring
(E) Push rod ASSY
(F) Seat