

## 10. Diagnostic Procedure with Diagnostic Trouble Code (DTC)

### A: DTC P0513 INCORRECT IMMOBILIZER KEY

#### DTC DETECTING CONDITION:

Incorrect immobilizer key (Use of unregistered key in body integrated unit)

Step	Check	Yes	No
1 <b>PERFORM IGNITION KEY REGISTRATION.</b> Perform registration to all keys used for the vehicle. Refer to the "PC application help for Subaru Select Monitor".	Is registration of all keys complete?	End.	Replace ignition keys (including transponder) which cannot be registered. Go to step 2.
2 <b>PERFORM IGNITION KEY REGISTRATION.</b> Perform registration to all keys used for the vehicle. Refer to the "PC application help for Subaru Select Monitor".	Is registration of all keys complete?	End.	Replace the body integrated unit. <Ref. to SL-47, Body Integrated Unit.> Register all ignition keys (transponders). Refer to the "PC application help for Subaru Select Monitor".

# Diagnostic Procedure with Diagnostic Trouble Code (DTC)


IMMOBILIZER (DIAGNOSTICS)

## B: DTC P1570 ANTENNA

### DTC DETECTING CONDITION:

Faulty antenna

### WIRING DIAGRAM:

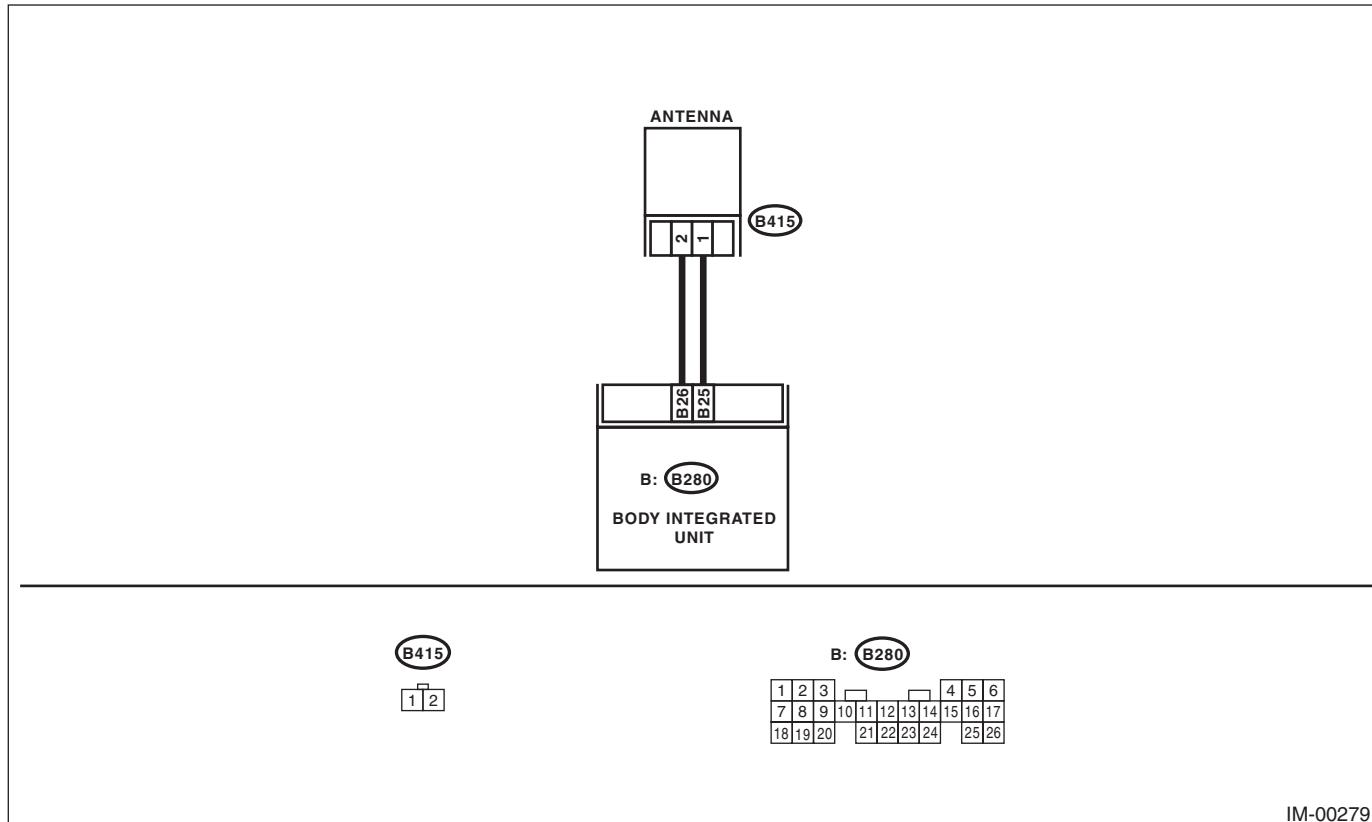

Step	Check	Yes	No
1 <b>CHECK ANTENNA CIRCUIT.</b> 1) Turn the ignition switch to OFF. 2) Disconnect the connector from the antenna. <Ref. to SL-51, Immobilizer Antenna.> 3) Measure the resistance of antenna circuit. <i>Connector &amp; terminal (B415) No. 1 — No. 2:</i>	Is the resistance less than 10 $\Omega$ ?	Go to step 2.	Replace the antenna. <Ref. to SL-51, Immobilizer Antenna.>
2 <b>CHECK ANTENNA CIRCUIT.</b> 1) Disconnect the connector from body integrated unit. 2) Measure the resistance between body integrated unit connector and antenna connector. <i>Connector &amp; terminal (B280) No. 25 — (B415) No. 1: (B280) No. 26 — (B415) No. 2:</i>	Is the resistance less than 10 $\Omega$ ?	Go to step 3.	Repair the harness.
3 <b>CHECK ANTENNA CIRCUIT.</b> Measure the resistance between body integrated unit connector and chassis ground. <i>Connector &amp; terminal (B280) No. 25 — Chassis ground: (B280) No. 26 — Chassis ground:</i>	Is the resistance 1 M $\Omega$ or more?	Go to step 4.	Repair the harness.

# Diagnostic Procedure with Diagnostic Trouble Code (DTC)

## IMMOBILIZER (DIAGNOSTICS)

Step	Check	Yes	No
4 <b>CHECK BODY INTEGRATED UNIT FUNCTION.</b> 1) Connect the connector to antenna. 2) Connect the connector to body integrated unit. 3) Insert the key into the ignition switch, then use an oscilloscope to measure changes in voltage between the antenna connector and the chassis ground. <i>Connector &amp; terminal (B280) No. 25 (+) — Chassis ground (-):</i>	Is the maximum voltage more than 40 V? (Approx. 0.1 second after inserting the key) Is the voltage 0 V? (Approx. 1 second after inserting the key)	Go to step 5.	Replace the body integrated unit. <Ref. to SL-47, Body Integrated Unit.> Register all ignition keys (transponders). Refer to the “PC application help for Subaru Select Monitor”.
5 <b>CHECK IGNITION KEY (TRANSPOUNDER).</b> 1) Remove the key from ignition switch. 2) Start the engine using other key which is already registered.	Does the engine start?	Replace the ignition key (transponder). Execute the registration procedure next. Refer to the “PC application help for Subaru Select Monitor”.	Replace the body integrated unit. <Ref. to SL-47, Body Integrated Unit.> Register all ignition keys (transponders). Refer to the “PC application help for Subaru Select Monitor”.

# Diagnostic Procedure with Diagnostic Trouble Code (DTC)

IMMOBILIZER (DIAGNOSTICS)

## C: DTC P1571 REFERENCE CODE INCOMPATIBILITY

### DTC DETECTING CONDITION:

Reference code incompatibility between body integrated unit and ECM

Step	Check	Yes	No
<b>1</b> <b>PERFORM IGNITION KEY REGISTRATION.</b> Perform registration to all keys used for the vehicle. Refer to the "PC application help for Subaru Select Monitor".	Is registration of all keys complete?	End.	Go to step <b>2</b> .
<b>2</b> <b>CHECK FOR ANY OTHER DTC ON DISPLAY.</b>	Is any other immobilizer DTC displayed?	Check the appropriate DTC using the "List of Diagnostic Trouble Code (DTC)". <Ref. to IM(diag)-14, List of Diagnostic Trouble Code (DTC).> Execute the registration procedure next. Refer to the "PC application help for Subaru Select Monitor".	Replace the ECM. <Ref. to FU(H4SO)-46, Engine Control Module (ECM).> Replace the body integrated unit. <Ref. to SL-47, Body Integrated Unit.> Register all ignition keys (transponders). Refer to the "PC application help for Subaru Select Monitor".

# Diagnostic Procedure with Diagnostic Trouble Code (DTC)


IMMOBILIZER (DIAGNOSTICS)

## D: DTC P1572 IMM CIRCUIT FAILURE (EXCEPT ANTENNA CIRCUIT)

### DTC DETECTING CONDITION:

Communication failure between body integrated unit and ECM

### WIRING DIAGRAM:

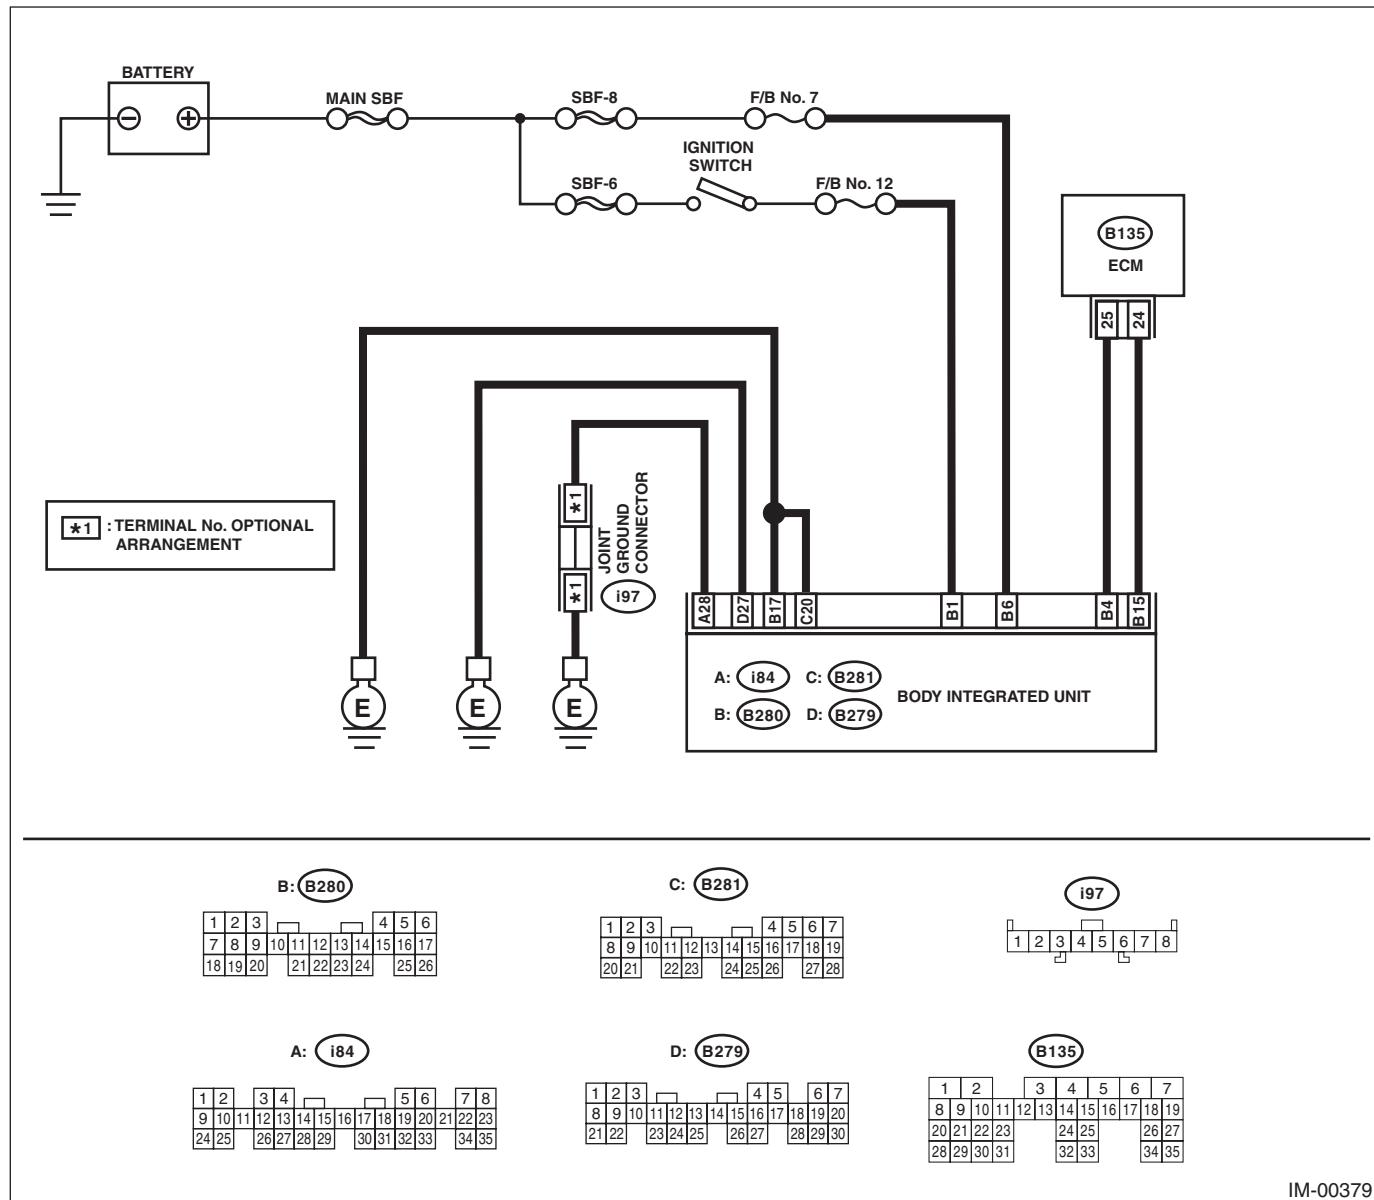

# Diagnostic Procedure with Diagnostic Trouble Code (DTC)

## IMMOBILIZER (DIAGNOSTICS)

Step	Check	Yes	No
2 <b>CHECK BODY INTEGRATED UNIT POWER SUPPLY CIRCUIT.</b> 1) Turn the ignition switch to ON. 2) Measure the voltage between the body integrated unit connector terminal and chassis ground.  <b>Connector &amp; terminal</b> <b>(B280) No. 1 (+) — Chassis ground (-):</b>	Is the voltage 10 V or more?	Go to step 3.	Check the harness for open or short circuit between the body integrated unit and ignition switch.
3 <b>CHECK BODY INTEGRATED UNIT GROUND CIRCUIT.</b> 1) Turn the ignition switch to OFF. 2) Measure the resistance between the body integrated unit connector terminal and chassis ground.  <b>Connector &amp; terminal</b> <b>(i84) No. 28 — Chassis ground:</b> <b>(B280) No. 17 — Chassis ground:</b> <b>(B281) No. 20 — Chassis ground:</b> <b>(B279) No. 27 — Chassis ground:</b>	Is the resistance less than 10 $\Omega$ ?	Go to step 4.	Repair the open circuit of the body integrated unit ground circuit.
4 <b>CHECK GROUND CIRCUIT FOR ECM.</b> Measure the resistance between the ECM ground terminal and engine ground.	Is the resistance less than 10 $\Omega$ ?	Go to step 5.	Repair the ECM ground circuit.
5 <b>CHECK HARNESS BETWEEN BODY INTEGRATED UNIT AND ECM.</b> 1) Disconnect the connector from the ECM and body integrated unit. 2) Measure the resistance between body integrated unit connector terminal and ECM connector terminal.  <b>Connector &amp; terminal</b> <b>(B280) No. 4 — (B135) No. 25:</b> <b>(B280) No. 15 — (B135) No. 24:</b>	Is the resistance less than 10 $\Omega$ ?	Go to step 6.	Repair the open circuit of the harness between the body integrated unit and ECM.
6 <b>CHECK COMMUNICATION CIRCUIT HARNESS.</b> 1) Turn the ignition switch to ON. 2) Measure the voltage between the body integrated unit connector terminal and chassis ground.  <b>Connector &amp; terminal</b> <b>(B280) No. 4 (+) — Chassis ground (-):</b> <b>(B280) No. 15 (+) — Chassis ground (-):</b>	Is the voltage 0 V?	Go to step 7.	Repair the harness between body integrated unit and ECM.
7 <b>CHECK COMMUNICATION CIRCUIT HARNESS.</b> Measure the voltage between ECM connector terminal and engine ground.  <b>Connector &amp; terminal</b> <b>(B135) No. 24 (+) — Engine ground (-):</b> <b>(B135) No. 25 (+) — Engine ground (-):</b>	Is the voltage 0 V?	Go to step 8.	Repair the harness between body integrated unit and ECM.
8 <b>CHECK ECM BY COMMUNICATION SHORT CHECK.</b> 1) Connect the connector to ECM. 2) Disconnect the connector from body integrated unit. 3) Start the communication short check. <Ref. to IM(diag)-8, COMMUNICATION LINE CHECK, OPERATION, Subaru Select Monitor.>	Is the communication short check OK?	Replace the body integrated unit. <Ref. to SL-47, Body Integrated Unit.> Register all ignition keys (transponders). Refer to the "PC application help for Subaru Select Monitor".	Replace the ECM. <Ref. to FU(H4SO)-46, Engine Control Module (ECM).> Perform the registration procedure next. Refer to the "PC application help for Subaru Select Monitor".

### NOTE:

Refer to the following inspection when DTC is detected after inspection above. <Ref. to IM(diag)-24, DTC P1578 METER FAILURE, Diagnostic Procedure with Diagnostic Trouble Code (DTC).>

**E: DTC P1574 KEY COMMUNICATION FAILURE****DTC DETECTING CONDITION:**

Communication failure between key and body integrated unit

Step	Check	Yes	No
<b>1 CHECK BODY INTEGRATED UNIT FUNCTION.</b> Insert the key into the ignition switch (LOCK position), then measure changes in voltage between the antenna connectors. <i>Connector &amp; terminal (B415) No. 1 (+) — Chassis ground (-):</i>	Is the maximum voltage more than 40 V? (Approx. 0.1 second after inserting the key) Is the voltage 0 V? (Approx. 1 second after inserting the key)	Go to step 2.	Replace the body integrated unit. <Ref. to SL-47, Body Integrated Unit.> Register all ignition keys (transponders). Refer to the “PC application help for Subaru Select Monitor”.
<b>2 CHECK IGNITION KEY (TRANSPOUNDER).</b> 1) Remove the key from ignition switch. 2) Start the engine using other key which is already registered.	Does the engine start?	Register ignition keys (transponders). Refer to the “PC application help for Subaru Select Monitor”.	Replace the body integrated unit. <Ref. to SL-47, Body Integrated Unit.> Register all ignition keys (transponders). Refer to the “PC application help for Subaru Select Monitor”.

# Diagnostic Procedure with Diagnostic Trouble Code (DTC)

## IMMOBILIZER (DIAGNOSTICS)

### F: DTC P1576 EGI CONTROL MODULE EEPROM

#### DTC DETECTING CONDITION:

- ECM malfunctioning
- Inaccessible ROM in ECM during key registration.

Step	Check	Yes	No
1 <b>PERFORM IGNITION KEY REGISTRATION.</b> Perform registration to all keys used for the vehicle. Refer to the “PC application help for Subaru Select Monitor”.	Is registration of all keys complete?	Using the all registered keys, make sure that the engine can start. This completes the work.	Go to step 2.
2 <b>PERFORM IGNITION KEY REGISTRATION.</b> Perform registration to all keys used for the vehicle. Refer to the “PC application help for Subaru Select Monitor”.	Is registration of all keys complete?	Using the all registered keys, make sure that the engine can start. This completes the work.	Go to step 3.
3 <b>PERFORM IGNITION KEY REGISTRATION.</b> Perform registration to all keys used for the vehicle. Refer to the “PC application help for Subaru Select Monitor”.	Is registration of all keys complete?	Using the all registered keys, make sure that the engine can start. This completes the work.	Replace the ECM. <Ref. to FU(H4SO)-46, Engine Control Module (ECM).> Execute the registration procedure next. Refer to the “PC application help for Subaru Select Monitor”.

## G: DTC P1577 IMM CONTROL MODULE EEPROM

### DTC DETECTING CONDITION:

- Body integrated unit malfunctioning
- Failed to access the ROM inside the body integrated unit.

Step	Check	Yes	No
1 <b>PERFORM IGNITION KEY REGISTRATION.</b> Perform registration to all keys used for the vehicle. Refer to the "PC application help for Subaru Select Monitor".	Is registration of all keys complete?	Using the all registered keys, make sure that the engine can start. This completes the work.	Go to step 2.
2 <b>PERFORM IGNITION KEY REGISTRATION.</b> Perform registration to all keys used for the vehicle. Refer to the "PC application help for Subaru Select Monitor".	Is registration of all keys complete?	Using the all registered keys, make sure that the engine can start. This completes the work.	Go to step 3.
3 <b>PERFORM IGNITION KEY REGISTRATION.</b> Perform registration to all keys used for the vehicle. Refer to the "PC application help for Subaru Select Monitor".	Is registration of all keys complete?	Using the all registered keys, make sure that the engine can start. This completes the work.	Replace the body integrated unit. <Ref. to SL-47, Body Integrated Unit.> Register all ignition keys (transponders). Refer to the "PC application help for Subaru Select Monitor".

# Diagnostic Procedure with Diagnostic Trouble Code (DTC)

IMMOBILIZER (DIAGNOSTICS)

## H: DTC P1578 METER FAILURE

### DTC DETECTING CONDITION:

- Reference code incompatibility between combination meter and body integrated unit
- Communication failure between body integrated unit and ECM

Step	Check	Yes	No
1 <b>CHECK DTC.</b> Read the DTC of body integrated unit using Subaru Select Monitor.	Is DTC B1401 detected?	Go to step 2.	<Ref. to IM(diag)-19, DTC P1572 IMM CIRCUIT FAILURE (EXCEPT ANTENNA CIRCUIT), Diagnostic Procedure with Diagnostic Trouble Code (DTC).>
2 <b>CHECK LAN COMMUNICATION SYSTEM.</b> Inspect LAN communication system. <Ref. to LAN(diag)-2, Basic Diagnostic Procedure.>	Is DTC U1300, U1301, U1302, B1100 or B1101 of the body integrated unit displayed?	Perform the diagnosis according to the DTC. <Ref. to LAN(diag)-35, List of Diagnostic Trouble Code (DTC).>	Go to step 3.
3 <b>CHECK COMBINATION METER.</b> 1) Perform the registration of immobilizer. Refer to the "PC application help for Subaru Select Monitor". 2) Start the engine.	Does the engine start?	System is normal.	Replace the combination meter. <Ref. to IDI-14, REMOVAL, Combination Meter.>

### NOTE:

- When the combination meter has been replaced, be sure to perform the registration procedure of immobilizer.
- When the combination meter and body integrated unit are replaced at a time, the registration can not be completed. In this case, it is necessary to rewrite the ID into the body integrated unit.

## I: DTC B1401 M COLLATION NG

### NOTE:

Refer to DTC P1578 "METER FAILURE" for diagnostic procedure. <Ref. to IM(diag)-24, DTC P1578 METER FAILURE, Diagnostic Procedure with Diagnostic Trouble Code (DTC).>

## J: DTC B1402 IMMOBILIZER KEY COLLATION NG

### NOTE:

For diagnostic procedures, refer to the following items.

- DTC P0513 "INCORRECT IMMOBILIZER KEY" <Ref. to IM(diag)-15, DTC P0513 INCORRECT IMMOBILIZER KEY, Diagnostic Procedure with Diagnostic Trouble Code (DTC).>
- DTC P1570 "ANTENNA" <Ref. to IM(diag)-16, DTC P1570 ANTENNA, Diagnostic Procedure with Diagnostic Trouble Code (DTC).>
- DTC P1574 "KEY COMMUNICATION FAILURE" <Ref. to IM(diag)-21, DTC P1574 KEY COMMUNICATION FAILURE, Diagnostic Procedure with Diagnostic Trouble Code (DTC).>

## K: DTC B1403 E/G REQUEST NG

### NOTE:

For diagnostic procedures, refer to DTC P1572 "IMM CIRCUIT FAILURE (EXCEPT ANTENNA CIRCUIT)". <Ref. to IM(diag)-19, DTC P1572 IMM CIRCUIT FAILURE (EXCEPT ANTENNA CIRCUIT), Diagnostic Procedure with Diagnostic Trouble Code (DTC).>

# LAN SYSTEM (DIAGNOSTICS)

# *LAN(diag)*

---

	Page
1. Basic Diagnostic Procedure .....	2
2. Check List for Interview .....	3
3. General Description .....	6
4. Electrical Component Location .....	8
5. Control Module I/O Signal .....	10
6. Subaru Select Monitor .....	15
7. Read Diagnostic Trouble Code (DTC) .....	31
8. Clear Memory Mode .....	32
9. Read Current Data .....	33
10. User Customizing .....	34
11. List of Diagnostic Trouble Code (DTC) .....	35
12. Diagnostic Procedure with Diagnostic Trouble Code (DTC) .....	38
13. General Diagnostic Table .....	84